


mountain chill

MT670-2

WATER CHILLER



INSTALLATION SHEET

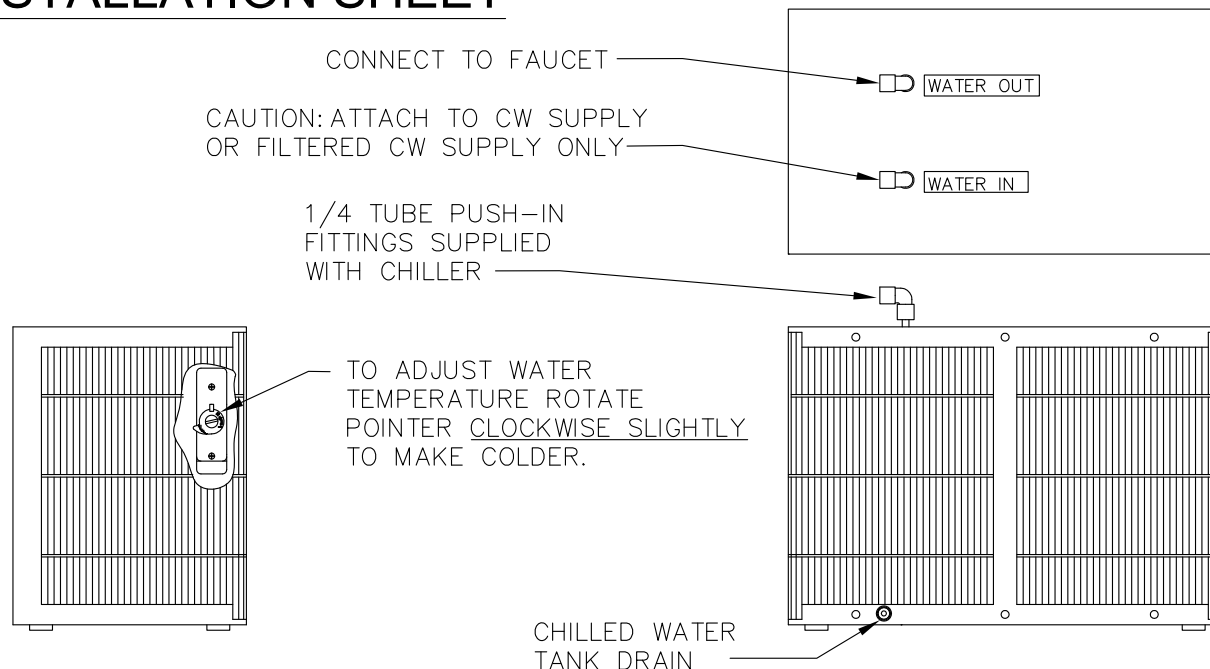

INSTALLATION INSTRUCTIONS

1. WHEN INSTALLING CHILLER IN A CABINET MAKE SURE THERE IS A VENT FOR AIR CIRCULATION OR AN OPENING IN CABINET BACK.
2. KEEP CHILLER AT LEAST 2 INCHES AWAY FROM CABINET WALL.
3. AFTER ALL CONNECTIONS ARE COMPLETE OPEN FAUCET TO FLUSH CHILLER, TANK, TUBING & FILTER (IF USED). CHECK FOR LEAKS.
4. PLUG IN CHILLER ALLOW TO RUN UNTIL IT STOPS (APPROXIMATELY 7 TO 12 MINUTES).
5. WATER IS NOW CHILLED AND READY FOR DRINKING.

MT670-2 CHILLER SPECIFICATIONS	
POWER RATING	115VAC 60HZ, 220VAC 50HZ
POWER USAGE	0.2 KWR/24HR
COMPRESSOR	SINGLE PHASE
REFRIGERANT	R134A
OUTPUT TEMP RANGE	46deg F to 50deg F
TANK CAPACITY	0.5 GALLONS
OUTPUT CAPACITY	1.5 GALLONS/HR
DIMENSIONS	10 3/16" HI, 12" DP, 16" WIDE
CERTIFICATIONS	C-UL-US, CE
WARRANTY	ONE YEAR ON ALL PARTS

MOUNTAIN PLUMBING PRODUCTS
 2611 REGENT BLVD SUITE 100
 DFW AIRPORT, TEXAS 75261