




6 _ _ T _ _ 0

Write purchase model number here for future reference


206221
206221
206221
206221

206221
206221
206221
206221

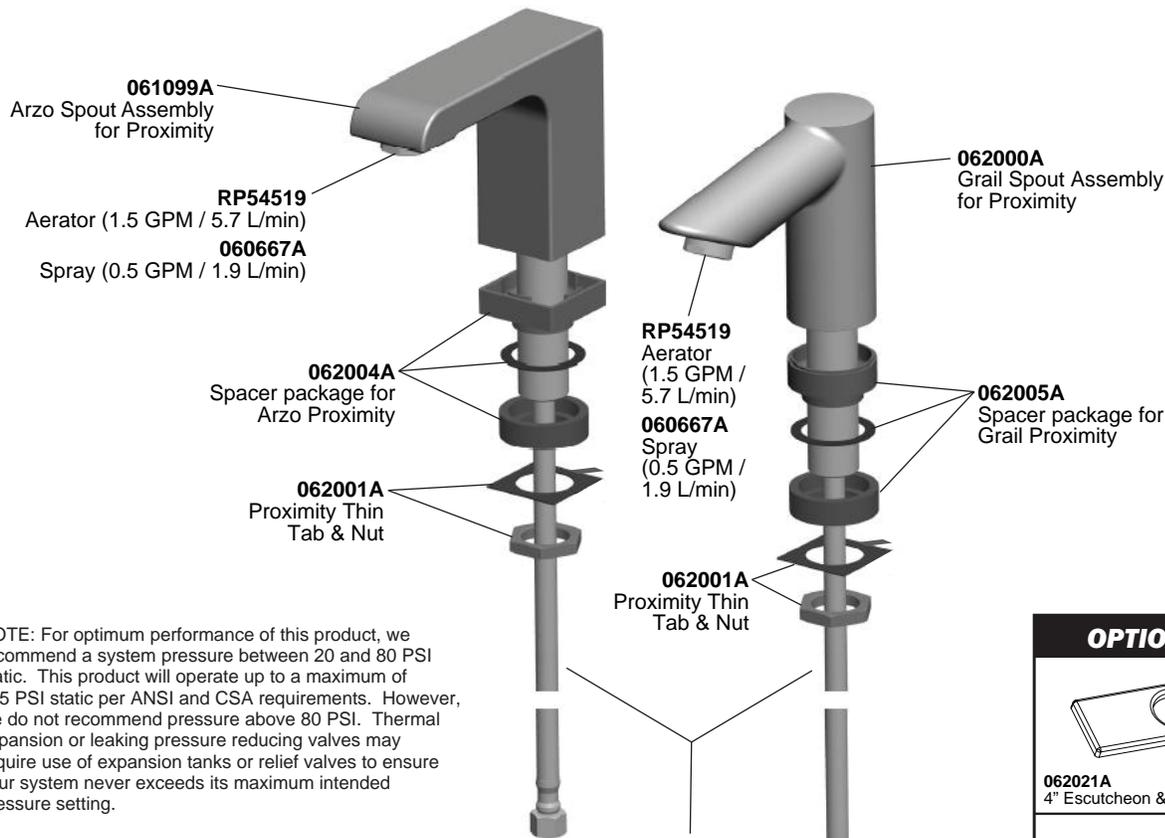

NOTE: For optimum performance of this product, we recommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressure above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds its maximum intended pressure setting.

OPTION LIST	
	062021A 4" Escutcheon & Gasket (Arzo)
	062022A 4" Escutcheon & Gasket (Grail)
	060684A Square Battery Holder
	060571A Mounting Hardware
TRANSFORMERS	
060704A Transformer 110 to 24 VAC 20VA up to 5 Electronic Valves	
060771A Transformer 110 to 24 VAC 40VA up to 10 Electronic Valves	
060772A Transformer 110 to 24 VAC 100VA up to 25 Electronic Valves	

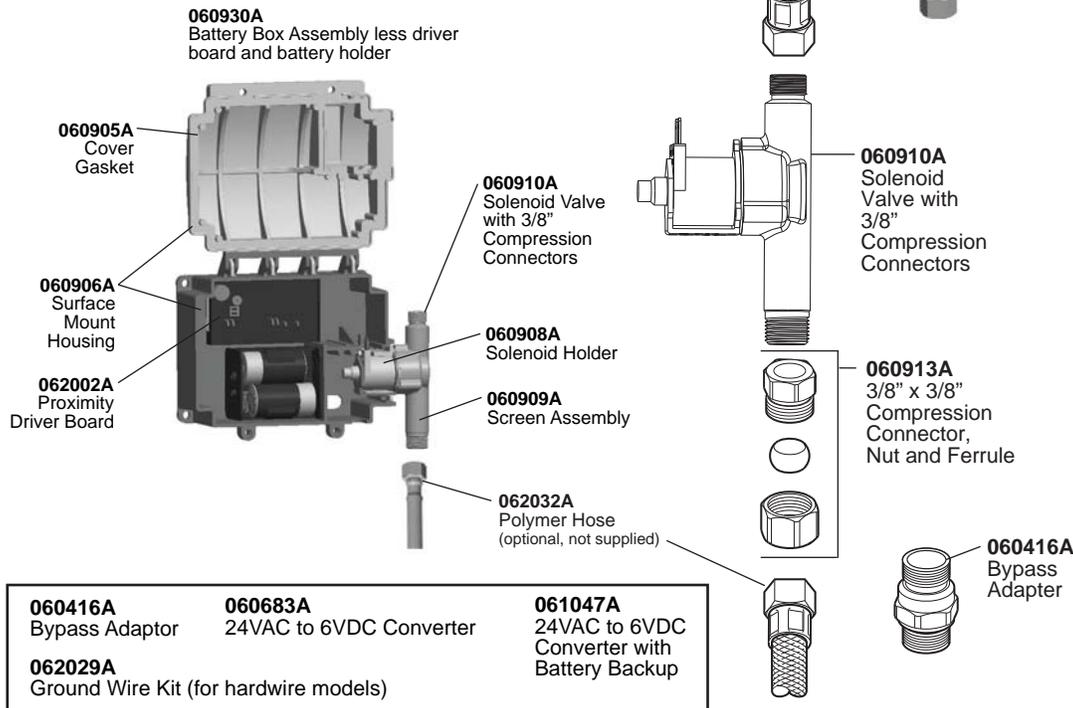

PLEASE LEAVE this M&I Sheet with the owner, maintenance plumber, etc. as items relating to ongoing maintenance suggestions and procedures are included.