

# PEX-END BALL VALVE

FULL PORT  
FORGED BRASS

ISO-9002



MODEL  
T-806



**LEGEND MODEL T-806** ball valves have barbed ends for use on pex tubing. They are constructed of heavy duty forged brass. They are designed for residential and commercial use. The stem is a blowout proof design.



MATERIAL SPECIFICATION	
PART	MATERIAL
HANDLE NUT	DACROMET COATED STEEL
HANDLE	DACROMET COATED STEEL
ANTI-FRICTION WASHER	TEFLON*
STEM O-RING	VITON
STEM THRUST WASHER	FORGED BRASS TEFLON*
BALL	CHROME PLATED BRASS
SEATS	TEFLON*
BODY	FORGED BRASS
END ADAPTER	FORGED BRASS

\*DUPONT REG. T.M.

**PRESSURE RATING**  
400 W.O.G. NON-SHOCK

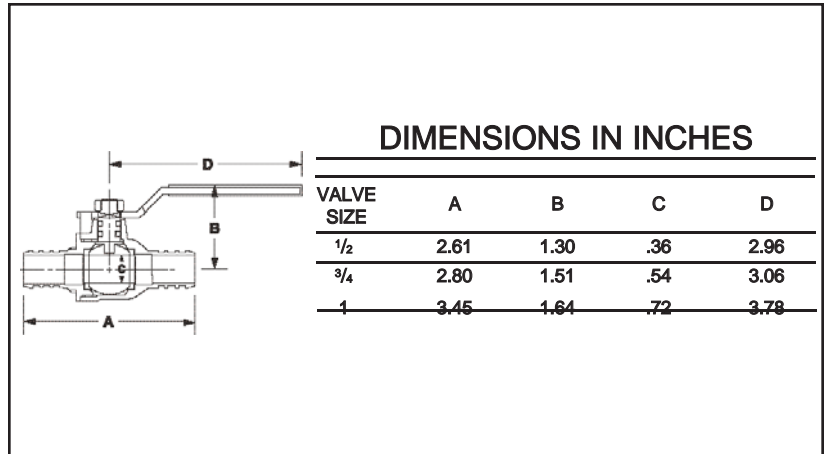

# MALE x FEMALE BALL VALVE

LARGE PORT  
FORGED BRASS

ISO-9002



MODEL  
T-900MxF

**LEGEND MODEL T-900MxF** ball valves are constructed of heavy duty forged brass. They are designed for commercial and industrial use on steam, water, oil or gas. Excellent for many OEM applications. Available with a lever or T-handle. The stem is a blowout proof design. The T-900MxF series ball valves feature a low-lead brass alloy that meets the requirements of NSF 61 Section 8 for lead leaching as specified in the Safe Drinking Water Act.





MATERIAL SPECIFICATION	
PART	MATERIAL
HANDLE NUT	DACROMET COATED STEEL
HANDLE	DACROMET COATED STEEL
ANTI-FRICTION WASHER	TEFLON*
STEM O-RING	VITON
THRUST WASHER	TEFLON*
STEM	FORGED BRASS
BALL	CHROME PLATED BRASS
SEATS	TEFLON*
BODY	FORGED BRASS
END ADAPTER	FORGED BRASS

\*DUPONT REG. T.M.

**PRESSURE RATING**  
1/8 - 3/4 600 W.O.G. NON-SHOCK  
1 500 W.O.G. NON-SHOCK

All sizes rated: 150 W.S.P.

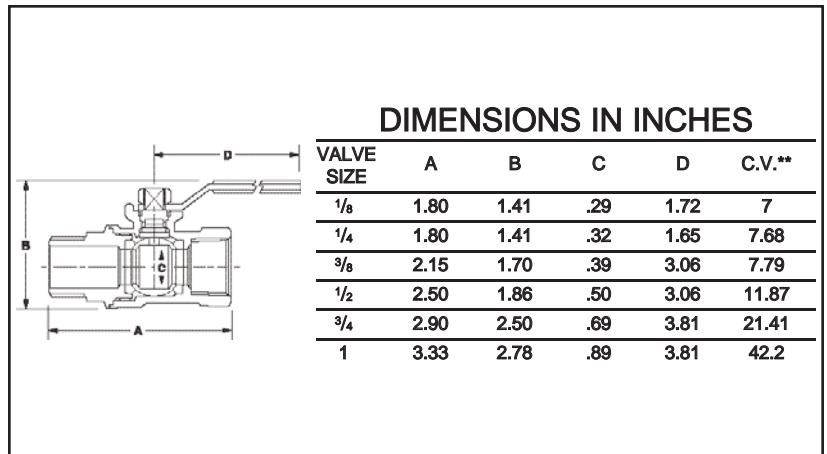

\*\*The CV Factor is the gallons of water per minute passed through the valve with a 1 PSI pressure drop.