

Meridian[®] 3803 Series

Meridian EDGE[™] Corterra[®] Tri-Basin - ADA/OBC Compliant



Please visit **www.acorneng.com** for most current specifications.

Meridian EDGE[™] Corterra[®] Tri-Basin - ADA/OBC Compliant

Meridian Corterra® Tri-Basin is intended to be mounted to accommodate ADA. Washbasin is constructed of Corterra® recycled solid surface polymer resin and combine the look of granite and the feel of commercial-grade designer basins. Adequate wall backing is required to support this wall mount, off-floor washbasin fixture. When mounted 33" at finished floor, fixture would comply with OBC requirements. When mounted 34" at finished floor, fixture would comply with ANSI, UFAS and ADA requirements. Alternatively, the unit may be mounted at the height to comply with ADA requirements for children. Compliance is subject to the interpretation and requirements of the local code authority.

Hinged Trap Enclosure is included to allow easy maintenance and to conceal hot & cold mixing valve, supply and waste connections. Enclosure is fabricated of 18 gage, type 304 stainless steel with a satin finish engineered to provide a profile that complies with both ADA & OBC.

Mounting Bracket is included and fabricated of 11 gage galvanized steel with rear anchoring slots. Adequate wall backing is required.

Counter with Integral Basin is constructed of Corterra[®] recycled solid surface polymer resin and is ICPA SS-1 approved. Corterra[®] uses a minimum of 15% post-consumer recycled material and a minimum 5% rapidly renewable material derived from bio-based sources.

Optional Sensor Operation is available, which includes infrared spout, 0.5 GPM flow control, and a plugin transformer; for optional battery powered sensor, a battery box is provided.

Optional Dyson Airblade™ Tap Faucet are optionally available, which includes infrared spout and air dryer, 0.5 GPM flow control, under counter motor bucket, lead-free stainless steel with a brushed finish.

Optional Valves are available; ASSE 1070 compliant valve delivers constant water flow by compensating for temperature and pressure fluctuations. Valve is factory set to 105° Fahrenheit and includes integral checks and strainer to prevent cross-flow and contamination. Maximum Operating Pressure 125 PSI. A Single Temperature Air-Control Metering Valve assembly and is offered as an alternative to the standard hot and cold mixing valve when a single water supply is desired.

GUIDE SPECIFICATION

Meridian EDGE[™] Corterra® Three-Station Washbasin by Acorn (Specify options). Unit will conform with ANSI, UFAS, OBC and ADA Accessibility Standards when properly installed. Counter and integral basin to be constructed of Corterra® recycled solid surface polymer resin and conform to ANSI Z124.3 and ANSI Z124.6 load ratings. Hinged Trap enclosure is to be constructed of heavy gage, type 304 stainless steel with satin finish.

Page 1 M.3803 Rev: 01/06/17

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • Fax: (626) 961-2200 • www.acorneng.com • E-mail: info@acorneng.com

Meridian® 3803: Meridian EDGE™ Corterra® Tri-Basin - ADA/OBC Compliant ◄

BASE MODEL NUMBER (Must Specify)

✓ 3803 Meridian EDGE™ Corterra® Single Basin

FIXTURE MOUNTING & WASTE (Must Specify) -1 Off-Floor, Wall Outlet

OPERATION (Must Specify)

🔲 -9	Less Spout and Valve			
	(Must Specify Punching if Required)			
	-H1 Single Hole, On Center			
	-H34 4" Centerset, Three Holes			
🛄 -Н	Hand Operation with Deck Mounted			
	Spout & Pushbutton			
🗋 -SO	Sensor Operation with Deck Mounted Spout			
🗋 -SO-BAT	Sensor Operation, Battery Powered with			
	Deck Mounted Spout (Batteries Not			
	Included)			
🗋 -AB09	Dyson Airblade™ Tap Short			
	(Deck Mounted Faucet)			

VALVE (Must Specify)

□ -MXTP ASSE 1070 Tempering Valve □ -ST Single Temperature Valve


CORTERRA® COLOR OPTIONS (Must Specify)

Color: _________ (Refer to <u>www.acorneng.com</u> for available colors, keyword search: CORTERRA)

PRODUCT OPTIONS

🗋 -EG	Enviro-Glaze (Enclosure), Color: (Refer to www.acorneng.com for available colors)
🗋 -MC	Mounting Carriers
🔲 -PDM	Metering Liquid Soap Dispenser
🖵 -PT	P-Trap Waste (Must Specify Type)
	🗋 Plastic P-Trap 📋 Brass P-Trap
🗋 -SOS	Sensor Operated Liquid Soap Dispenser
🗋 -SOS-BAT	Sensor Operated, Battery Powered Liquid Soap Dispenser (Batteries Not Included)

Please visit <u>www.acorneng.com</u> for most current specifications.

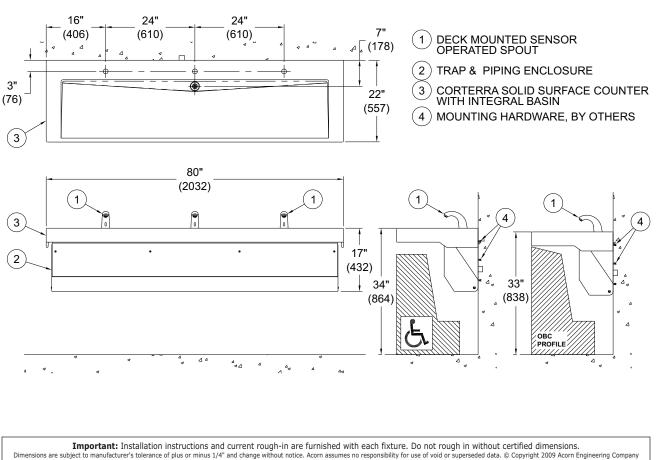

Selection Summary		Approved for Manufacturing	
Model No. & Option		Company	Title
Quantity		Signature	Date
Page	2 M.38	303	Rev: 01/06/17

Acorn Engineering Company • 15125 Proctor Avenue • P.O. Box 3527 • City of Industry, CA 91744-0527 U.S.A. Tel: (800) 488-8999 • (626) 336-4561 • Fax: (626) 961-2200 • www.acorneng.com • E-mail: info@acorneng.com