



PRODUCT SHEET
ELLIPSE 6036
 60" X 36" X 20"



THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB no therapy	\$

THERMOMASSEUR (TMU)	
Jets	37
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Chromatherapy - 2 LED	\$

THERMASENS (TMSU)		TUB no therapy
AromaCloud®	included	\$
Chromatherapy - 2 LED	included	\$
WarmTouchShell®	included	\$
DOT control	included	included with therapy

FEATURES			
Installation	Drop-in or Undermount*		
No. of bathers	↓	Imp. gallons	37
US gallons	44		

OPTIONAL UPCHARGE APPLICABLE

COLOR

Standard		
White	Biscuit	
Optional		\$
Black	Sandbar	Gray

CONTROL (TMU ONLY)

MiaMultij®	\$
------------	----

WASTE & OVERFLOW 16" X 35"

Chrome	\$
White, Biscuit	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

DON'T FORGET TO INDICATE FLAT OR ROLLED DECK.
 * THE AROMACLOUD IS NOT AVAILABLE WITH UNDERMOUNT INSTALLATION.

1 800 463.2187 info@bainultra.com | From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

ELLIPSE 6036 60" X 36" X 20"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000034

OTHERS




- There is a height difference for the rolled deck (see drawing Detail A).
- Available with flat deck or rolled deck.

TOTAL PRICE

\$

DROP-IN/UNDERMOUNT INSTALLATION

A
For flat and rolled deck: Deck modified to host the AromaCloud

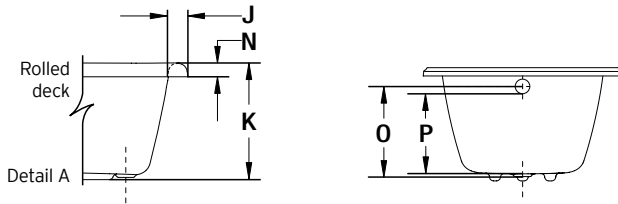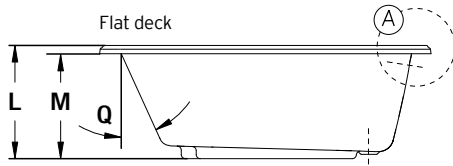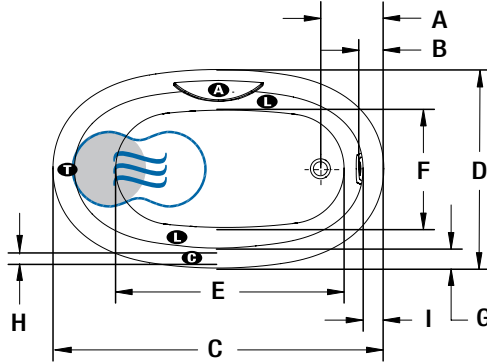

Available with flat or rolled deck.

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center waste	11 1/2"
B	Outside edge to overflow	4 1/4"
C	Total length	60"
D	Total width	36"
E	Bathing well length	42 1/8"
F	Bathing well width	21 7/8"
G	Deck width	3 7/8"
H	Flat surface width	2 1/2"
I	Deck width	3 7/8"
J	Rolled deck width	3 7/8"
K	Height from bottom of tub to top deck	21"
L	Height from bottom of tub to top deck	20"
M	Height from bottom of tub to bottom of lip	18 1/2"
N	Height from bottom of lip to top deck	2 1/2"
O	Height from waste to center of overflow	15 5/8"
P	Maximum water level	13 7/8"
Q	Slope of backrest	25°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- B** Indicates heated backrest (TMU)
- A** Indicates control position when factory-installed
- W** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A, 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

Approx. shipping weight	110 lbs
Turbine power	600 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.