

THERMOMASSEUR® BATH	\$
THERMASENS® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	54
2 heated backrests (Independently controlled)	included
2 heated headrests (Independently controlled)	
MiaPlus® Control	included
Geysair®	included
AromaCloud [®]	\$
Chromatherapy - 3 LED	\$

THERMASENS (TMSU)			
AromaCloud®	included		
Chromatherapy - 3 LED	included		
WarmTouchShell®	included		
DOT control	included		
2 nd WarmTouchShell®	\$		

TUB	
	\$
	\$
	\$
inc	luded with therapy
	\$

FEATURES			
Installation		Drop-in or Alcov	e (3 walls)
No. of bathers	ŤŤ	Inverted V	2
US gallons	50	Armrests	4
Imp. gallons	41	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHAR	E APPL	ICABLE		
COLOR				
Standard White Biscuit				
Optional Black Sandbar Gray			\$	
CONTROL (TMU ONL)	()			
MiaMulti®			\$	
SKIRT	1	MULTIFIT	SJ-1	
Skirt	\$		\$	
Optional color	\$		\$	
CLEAR ACRYLIC GRA	AB BARS			
With Chrome, Brass or Bru	shed nicke	el inserts	\$	
DRAIN & OVERFLOW		16" X 35"	INTEGRATED WASTE & OVERFLOW	ı
Chrome		\$	\$	
White, Biscuit		\$	\$	
Brass		\$	\$	
Brushed nickel, Polished n	ickel	\$	\$	
Oil-rubbed bronze		\$	N/A	
TILE FLANGE (specify	right or lef	t)		
Ordered with bath, uninsta	lled		\$	
Factory-installed			\$	



AMMA 7236 72" x 36" x 21"


ACCESSORIES (OPTIONAL)


OTHER Optional tile flange (specify front or back).

TOTAL PRICE

\$

DROP-IN/ALCOVE INSTALLATION

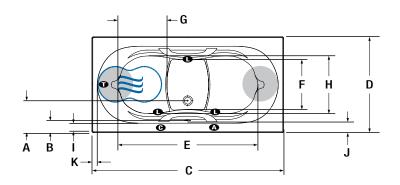



LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12"
В	Outside edge to overflow	4 1/4"
С	Total length	72"
D	Total width	36"
E	Bathing well length	52 1/2"
F	Bathing well width at foot area	18 3/4"
G	Raised seat length	18 1/2"
Н	Raised seat width	21 3/4"
I	Deck width (narrowest point)	3 1/8"
J	Deck width (widest point)	4"
K	Deck width at backrest end end	2"
L	Total height to headrest	23 1/8"
М	Height from bottom of tub to top deck	21"
N	Height from bottom of tub to bottom of lip	19 1/2"
0	Height from drain to center of overflow	17"
P	Maximum water level	15 1/4"
Q	Slope of backrest	17°

Indicates turbine position (TMU)

■ Indicates LED light position

Indicates heated backrest (TMU)

• Indicates control position when factory-installed

Indicates WarmTouchShell position (TMSU)

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

TECHNICAL SPECIFICATIONS		
Hot water supply required	Should be 70% of water capacity of tub or greater.	
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	158 lbs
Turbine power	600 W
Air heater	700 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



