



PRODUCT SHEET
AMMA 7242
 72" X 42" X 22"



THERMOMASSEUR® BATH	\$
THERMASENS™ BATH	\$
SOAKER BATH	N/A

THERMOMASSEUR (TMU)	
Jets	58
2 heated backrests (Independently controlled)	included
2 heated headrests	included
MiaPlus® Control	included
Geysair™	\$
AromaCloud™	\$
Chromatherapy - LED	\$

THERMASENS (TMSU)	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included
2 nd WarmTouchShell	\$

FEATURES INCLUDED			
Installation type	Drop-in & Alcove (3 walls)		
No. of bathers		Inverted V	2
US gallons	65	Armrests	4
Imp. gallons	54	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHARGE APPLICABLE		
COLORS		
Standards		
White	Bone	Biscuit
Almond		
Optionals		
Black	Mexican sand	Cashmere
Sandbar	Gray	
CONTROL (TMU ONLY)		
MiaMulti®		\$
SKIRTS		
	MULTIFIT	ELEGANCE
Skirts	\$	\$
Optional colors	\$	\$
CLEAR ACRYLIC GRAB BARS		
With Chrome, Brass or Brushed nickel inserts		\$
DRAIN & OVERFLOW		
		16" X 35"
Chrome		\$
White, Biscuit & Bone		\$
Brass		\$
Brushed nickel, Polished nickel & Oil-rubbed bronze		\$
TILE FLANGE		
Ordered with bath, uninstalled		\$
Factory-installed		\$

DON'T FORGET THAT ORDERING A TILE FLANGE FOR THIS BATH IS POSSIBLE.

1 800 463.2187 info@bainultra.com From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

AMMA 7242 72" X 42" X 22"


ACCESSORIES (OPTIONAL)

OTHER

Optional tile flange (specify front or back).

TOTAL PRICE

\$

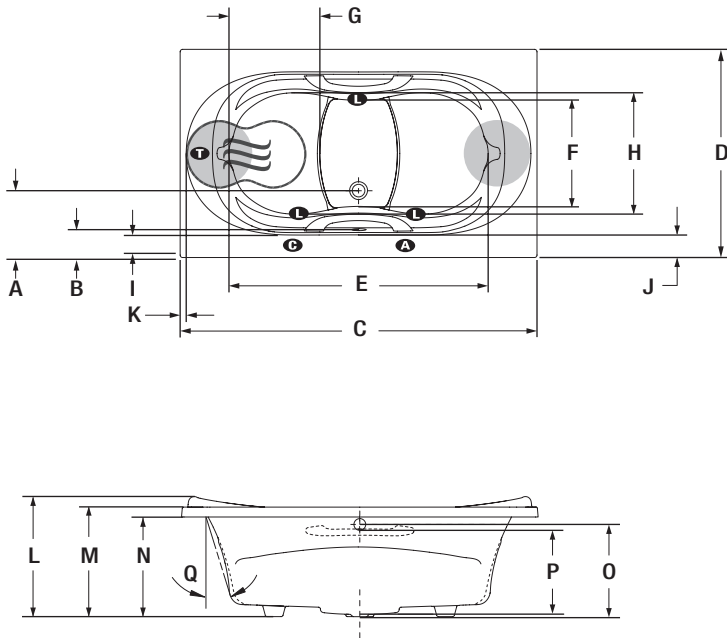

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	13 1/2"
B	Outside edge to overflow	5 3/8"
C	Total length	72 1/4"
D	Total width	42"
E	Bathing well length	52 1/4"
F	Bathing well width at foot area	21 3/8"
G	Raised seat length	18 5/8"
H	Raised seat width	24"
I	Deck width (narrowest point)	4"
J	Deck width (widest point)	5 1/4"
K	Deck width at backrest end end	1 1/4"
L	Total height to headrest	24 1/4"
M	Height from bottom of tub to top deck	22 1/8"
N	Height from bottom of tub to bottom of lip	20 1/8"
O	Height from drain to center of overflow	18 1/8"
P	Maximum water level	16 3/8"
Q	Slope of backrest	18°

- Indicates turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell position (TMSU)
- Indicates LED light position
- Indicates control position when factory-installed
- Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

TECHNICAL SPECIFICATIONS

Hot water supply required

Should be 70% of water capacity of tub or greater.

Turbine

Access to the pump must be at least 18" X 22". Standard connection is a 20 A, 120 V, 60hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With the Geysair, a second dedicated line, GFCI protected, 15A, 120 V, 60 hz is needed for the WarmTouchShell and additional options. Air vent is necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

Approx. shipping weight

195 lbs

Turbine power

755 W

Air heater

1 000 W

WARRANTY

Controls-LED-Geysair*

5 years

Bath & turbine*

20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.