

FEATURES	
Installation type	- Drop-in - Undermount
No. of bathers	2
Raised seats	2
Heated backrests (Independently controlled)	2
Heated headrests	2
Inverted V	2
Armrests	4
Grab bars (color match)	2
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	N/A

Chron	natherapy	3-LED		\$	
Sound Therapy (Euphonia™ System)				\$	
COLO	RS				
Stand	ards				
White	Bone	Biscuit	Almond		
Option	nals			\$	
Black	Mexican sand	Innocent	Cashmere	Sandbar	Grey

Controls*	5 years
Sath & turbine*	20 years

WARRANTY








AMMA OVAL 7242 72 x 42 x 22


ACCESSORIES - OPTIONAL


Clear acrylic grab bars	With Chrome, Brass or Brushed nickel inserts	\$
Drain & overflow	D-11 (22" - 27") - Chrome - White, Biscuit, Bone - Brass - Brushed nickel, Polished nickel, Oil-rubbed bronze	\$ \$ \$

Control	MiaMulti	\$
Cutting template	# 90000036	
Others	or raised deck.	ht difference for the flat ving Detail A).

TOTAL PRICE	\$
-------------	----

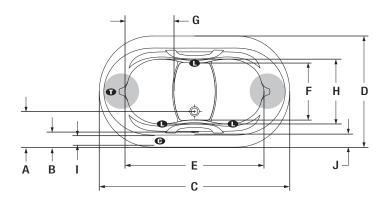





LETTER	DESCRIPTION	MEASURE
Α	Outside edge to center drain	13 1/2"
В	Outside edge to overflow	5 3/8"
C	Total length	72"
D	Total width	42"
E	Bathing well length	52 1/4"
F	Bathing well width at foot area	21 3/8"
G	Raised seat length	18 5/8"
Н	Raised seat width	24"
I	Flat surface width	3 7/8"
J	Deck width	5 1/4"
K	Total height to headrest	24 3/8"
L	Height from bottom of tub to top deck	22 1/8"
М	Height from bottom of tub to bottom of lip	20 1/8"
N	Height from bottom of lip to top deck	2"
0	Height from drain to center of overflow	18 1/8"
P	Maximum water level	16 3/8"
Q	Slope of backrest	18°

Indicates turbine position
Indicates heated backrest

Indicates LED light position

• Indicates control position when factory-installed

AMMA OVAL 7242 TECHNICAL SPECIFICATIONS

Jets	58
US gallons	65
Imp. gallons	54
Approx. shipping weight	195 lbs
Turbine power	755 W
Air heater	1000 W

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine access	Must be at least 18" X 22" to access the pump. Must be connected to a 20 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Standards	All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: (www.bainultra.com/standards).

1000 W federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).

1 800 463.2187 9 From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)