



PRODUCT SHEET  
**EVANESCENCE 6636**  
 66" X 36" X 28"



**FREESTANDING THEATRE STAGE®**

<b>THERMOMASSEUR® BATH</b>	\$	\$
<b>TUB no therapy</b>	\$	\$

<b>THERMOMASSEUR (TMU)</b>		
Jets		35
1 heated backrest		included
MiaMulti® Control*		included
Geysair™	\$	
AromaCloud™		N/A
Chromatherapy - LED	\$	

<b>TUB no therapy</b>		
AromaCloud™		N/A
Chromatherapy - LED	\$	
WarmTouchShell™	\$	
DOT control		included with therapy
2 <sup>nd</sup> WarmTouchShell	\$	

<b>FEATURES INCLUDED</b>			
Installation type	Freestanding & Theatre Stage		
No. of bathers		Raised headrests	2
US gallons	51	Drain & overflow	inst. & incl.
Imp. gallons	42		

**FEATURES INCLUDED**

**COLOR**

<b>Standard</b>
<input type="checkbox"/>
White

**DON'T FORGET THAT THIS TUB IS AVAILABLE IN WHITE ONLY.**  
 \*CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.

1 800 463.2187 [info@bainultra.com](mailto:info@bainultra.com) | From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 From 8 a.m. to 5 p.m. on Friday (EST)

# EVANESCENCE 6636 66" X 36" X 28"

## ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

# 90000064




### OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- Controls cannot be installed on the bath.

TOTAL PRICE

\$

## FREESTANDING INSTALLATION

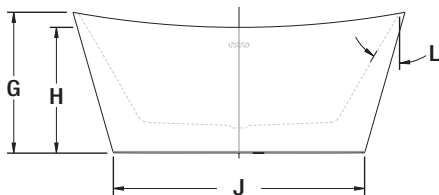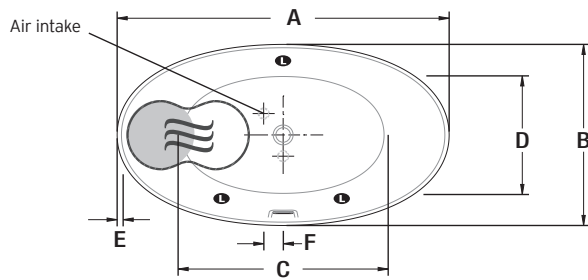



LETTER	DESCRIPTION	MEASURE
A	Total length	66"
B	Total width	36"
C	Bathing well length	41 3/4"
D	Bathing well width	23 5/8"
E	Deck Thickness	1 1/4"
F	Center waste to air intake	3 7/8"
G	Total height to headrest	28"
H	Minimum height to center	25"
I	Height from drain to center of overflow	16"
J	Base length	50"
K	Base width	26 1/4"
L	Slope of backrest	31°

● Indicates LED light position

● Indicates heated backrest (TMU)

○ Indicates WarmTouchShell position (TMSU)

## THEATRE STAGE® INSTALLATION

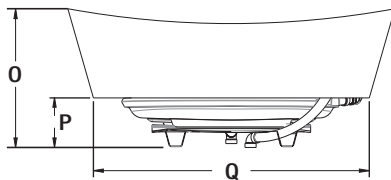

O	Height from bottom of tub to top deck	28"
P	Stage height	10"
Q	Base length	55 5/8"
R	Base width	30 1/8"

## TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentations](http://www.bainultra.com/documentations)).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	230 lbs
Turbine power	755 W
Air heater	700 W

### WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

