



# PRODUCT SHEET

## SANOS 6636

66" X 36" X 24"



### FREESTANDING THEATRE STAGE®

THERMOMASSEUR® BATH	\$	\$
THERMASENS™ BATH	\$	\$
SOAKER BATH	\$	\$

### THERMOMASSEUR (TMU)

Jets	38
1 heated backrest	included
MiaMulti® Control*	included
Geysair™	\$
AromaCloud™	\$
Chromatherapy - LED	\$

### THERMASENS (TMSU)

AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included

### FEATURES INCLUDED

Installation type	Freestanding & Theatre Stage		
No. of bathers		Imp. gallons	40
US gallons	48		

### OPTIONAL UPCHARGE APPLICABLE

#### COLORS

##### Standards

White	Bone	Biscuit	Almond

##### Optionals

Black	Mexican sand	Cashmere	Sandbar	Gray

\$

#### DRAIN & OVERFLOW (EXPOSED)

#### D13 (BALNEO®)

Chrome	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$
Unplated	\$



DON'T FORGET TO INDICATE FLAT OR ROLLED DECK.

\*FOR TMU, CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.

1 800 463.2187 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
From 8 a.m. to 5 p.m. on Friday (EST)

BainUltra®

The quest for your wellness®

www.bainultra.com

# SANOS 6636 66" X 36" X 24"

## ACCESSORIES (OPTIONAL)


### OTHERS

- Faucets must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- There is a height difference for the rolled deck (see detail A).
- TMU: Control must be wall-mounted.
- TMSU: Dot controls are located on either sides of the AromaCloud.

### TOTAL PRICE

\$

## FREESTANDING INSTALLATION

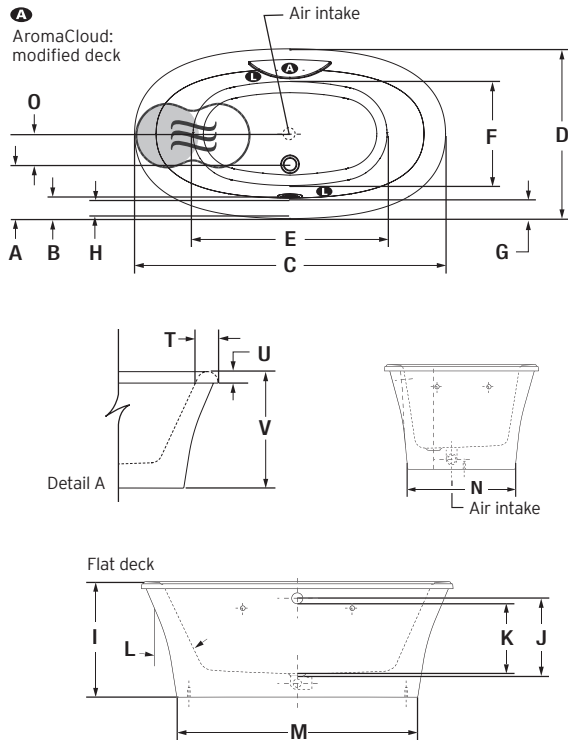


Available with flat or rolled deck.

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	4"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width	4 1/4"
H	Flat surface width	3"
I	Height from bottom of tub to top deck	24 1/2"
J	Height from drain to center of overflow	16 5/8"
K	Maximum water level	14 7/8"
L	Slope of backrest	25°
M	Base length	50 7/8"
N	Base width	24 7/8"
O	Distance from center air intake to center drain	3 1/4"
T	Roller deck width	4 3/4"
U	Height from bottom of lip to top deck	2 1/2"
V	Height from bottom of tub to top deck	25 1/2"

● Indicates heated backrest (TMU)    ● Indicates LED light position  
 ☰ Indicates WarmTouchShell position (TMSU)    ● Indicates AromaCloud position

## THEATRE STAGE® INSTALLATION

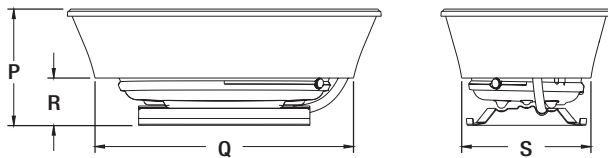

P	Height from bottom of tub to top deck	24 1/2"
Q	Base length	54 3/8"
R	Stage height	10"
S	Base width	27 1/8"

## TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentations](http://www.bainultra.com/documentations)).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	240 lbs
Turbine power	755 W
Air heater	700 W

### WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

