

FREESTANDING THEATRE STAGE®


THERMOMASSEUR® BATH	\$ \$
THERMASENS™ BATH	\$ \$
SOAKER BATH	\$ \$

THERMOMASSEUR (TMU)		
Jets	40	
1 heated backrest	included	
MiaMulti® Control*	included	
Geysair™ \$		
AromaCloud™	\$	
Chromatherapy - LED \$		

THERMASENS (TMSU)	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included
2 nd WarmTouchShell	\$

FEATURES INCLUDED			
Installation type		Freestanding & Th	neatre Stage
No. of bathers	22	Imp. gallons	49
US gallons	59		

OPTIONAL UPCHARGE APPLICABLE			
COLORS			
Standards			
White Bone Biscuit Almond			
Optionals		\$	
Black Mexican Cashmere Sandbar Gray			
TOWEL BARS	т	JBE	TWIST
Chrome	\$	\$	
Brass	\$	\$	
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$	\$	
Unplated	\$	\$	
DRAIN & OVERFLOW (EXPOSED)		D13	(BALNEO®)
Chrome		\$	
Brass		\$	
Brushed nickel, Polished nickel & Oil-rubbe	ed bronze	\$	
Unplated		\$	






SANOS 7240 72" X 40" X 24"

- There is a height difference for the rolled deck (see drawing Detail A). - Faucets must be freestanding or wall-mounted. - The turbine must be remotely installed. - TMU: Control must be wall-mounted. - TMSU: Dot controls are located on either sides of the AromaCloud.

TOTAL PRICE \$


FREESTANDING INSTALLATION

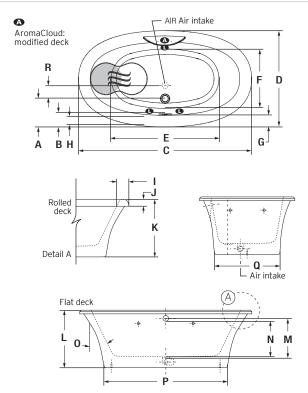

LETTER	DESCRIPTION	MEASURE
Α	Outside edge to center drain	11 3/4"
В	Outside edge to overflow	4 3/8"
С	Total length	72"
D	Total width	40"
E	Bathing well length	46 1/8"
F	Bathing well width	24 3/4"
G	Deck width	4 5/8"
Н	Flat surface width	3 3/8"
I	Rolled deck width	5 3/8"
J	Height from bottom of lip to top deck	2 1/2"
K	Height from bottom of tub to top deck	25 1/2"
L	Height from bottom of tub to top deck	24 1/2"
M	Height from drain to center of overflow	16 5/8"
N	Maximum water level	14 7/8"
0	Slope of backrest	27°
P	Base length	55 7/8"
Q	Base width	27 7/8"
R	Distance from center air intake to center drain	5"


Available with flat or rolled deck.

	indicates	ricutcu bucki est (Tivio)
(M)	Indicates	WarmTouchShell position (TMSU)



THEATRE STAGE® INSTALLATION

TECHNICAL SPECIFICATIONS



S	Height from bottom of tub to top deck	24 1/2"
Т	Base length	59 3/8"
U	Stage height	10"
V	Base width	30 1/8"

TECHNICAL SI ECH ICATIONS		
Hot water supply required	Should be 70% of water capacity of tub or greater.	
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height.
The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to
change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ.
BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

Approx. shipping weight	260 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

^{*}Some restrictions apply | www.bainultra.com/warranty



