



PRODUCT SHEET

THERMAL OVAL 55

66" X 34" X 20"



THERMOMASSEUR® BATH	\$
THERMASENS™ BATH	\$
SOAKER BATH	\$

THERMOMASSEUR (TMU)	
Jets	40
1 heated backrest	included
1 heated headrest	included
MiaPlus® Control*	included
Geysair™	\$
AromaCloud™	\$
Chromatherapy - LED	\$

THERMASENS (TMSU)	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included
2nd WarmTouchShell	\$

FEATURES INCLUDED			
Installation type			Drop-in
No. of bathers		Armrests	4
US gallons	44	Grab bar (color match)	1
Imp. gallons	37		

OPTIONAL UPCHARGE APPLICABLE	
COLORS	
Standards	
	White
	Bone
	Biscuit
	Almond
Optionals	
	Black
	Mexican sand
	Cashmere
	Sandbar
	Gray
	\$
CONTROL (TMU ONLY)	
MiaMultj®	\$
CLEAR ACRYLIC GRAB BARS	
With Chrome, Brass or Brushed nickel inserts	\$
DRAIN & OVERFLOW	
	16" X 35"
Chrome	\$
White, Biscuit & Bone	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

CONTROL & FAUCET CAN NOT BE INSTALLED ON THE BATH DECK.
 * FOR A TMU WITH AROMACLOUD, THE CONTROL CAN NOT BE INSTALLED ON THE BATH DECK.

1 800 463.2187 info@bainultra.com From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

THERMAL OVAL 55 66" X 34" X 20"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000022



OTHER

Very small bath for two.

TOTAL PRICE

\$

A For TMU, the AromaCloud will replace the control position.*
For TMSU, the AromaCloud and the DOT will be installed on the deck.

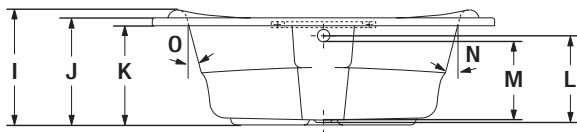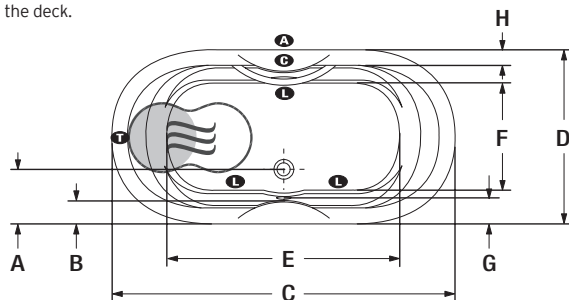

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	10 1/4"
B	Outside edge to overflow	4 1/2"
C	Total length	66 1/4"
D	Total width	33 1/2"
E	Bathing well length	43"
F	Bathing well width	19"
G	Deck width (widest point)	4 3/8"
H	Deck width (narrowest point)	2 3/8"
I	Total height to headrest	21 1/2"
J	Height from bottom of tub to top deck	20"
K	Height from bottom of tub to bottom of lip	18 1/2"
L	Height from drain to center of overflow	15 5/8"
M	Maximum water level	14"
N	Slope of backrest	13°
O	Slope of backrest	25°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- Indicates heated backrest (TMU)
- C** Indicates control position when factory-installed
- ☁** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

Approx. shipping weight	126 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.