


BRUTE MINI

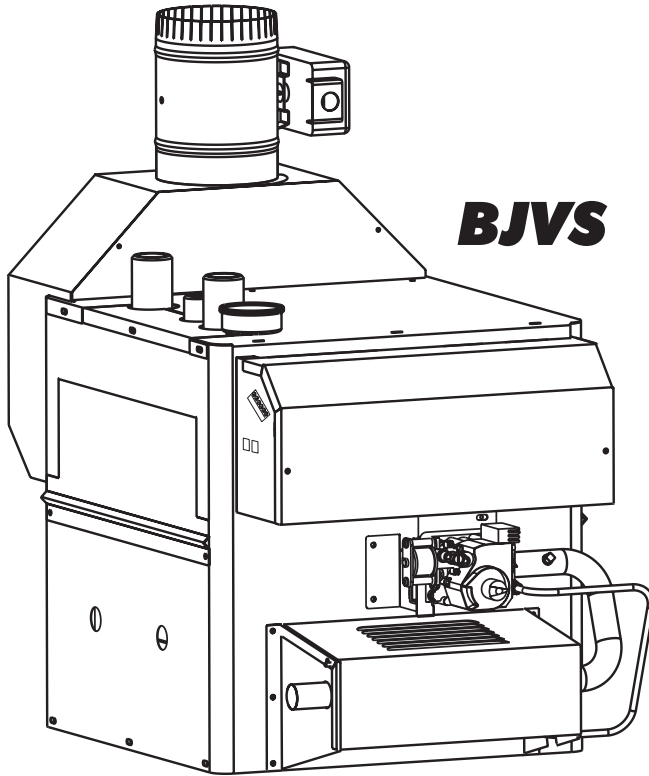

Hydronic Boilers

BJVS Residential Gas-Fired Boiler

Indoor Sizes 50-225 MBTU/h

BRADFORD WHITE
Submittal Data


Standard Equipment

- PI Controller
- Outdoor reset with ratios of 0.4 to 3.6
- Warm Weather Shutdown (WWSD)
- Domestic Hot Water Operation (DHW)
- Indicator lights for power, heat call, DHW call and WWSD
- Automatic boiler differential
- Pump pre-purge, post-purge and exercise
- Codes for sensor errors
- Venting: built-in draft diverter
- Design certified/tested by CSA International
- Natural or propane gas
- Maximum working pressure: water 30 P.S.I., ASME rated
- Hydrostatic test pressure at factory: 60 P.S.I.
- 30 psi ASME pressure relief valve
- Maximum gas supply pressure: Natural 10.5" W.C.; Propane 13" W.C.
- Pressure relief valve: capacity in excess of boiler input rating
- Material specifications per Section IV, ASME Code
- Headers: cast iron per ASME requirements
- Tubes: copper with integral formed external fins
- Main burners: aluminized steel
- Air supply: natural aspiration
- Altitudes: 0–10,000 ft.
- Spark to pilot ignition
- Electrical: 115V-60Hz-1PH less than 12 Amps 24V transformer mounted and wired
- Pump relay: standard
- Vent damper and wire harness
- Blocked vent safety switch (B.V.S.S.)
- Flame rollout safety switch
- Up to 85% AFUE
- 20-Year Limited Warranty

Minimum Clearances from Adjacent Construction

Size	Minimum Clearances, inches <i>cm</i>				
	Left + Right Sides, Rear	Front	Flue	Top	
50	6 15	4 10	6 15	23	58
75	6 15	4 10	6 15	23	58
100	6 15	4 10	6 15	23	58
125	6 15	4 10	6 15	23	58
160	6 15	4 10	6 15	36	91
225	6 15	4 10	6 15	36	91

Dimensional Data

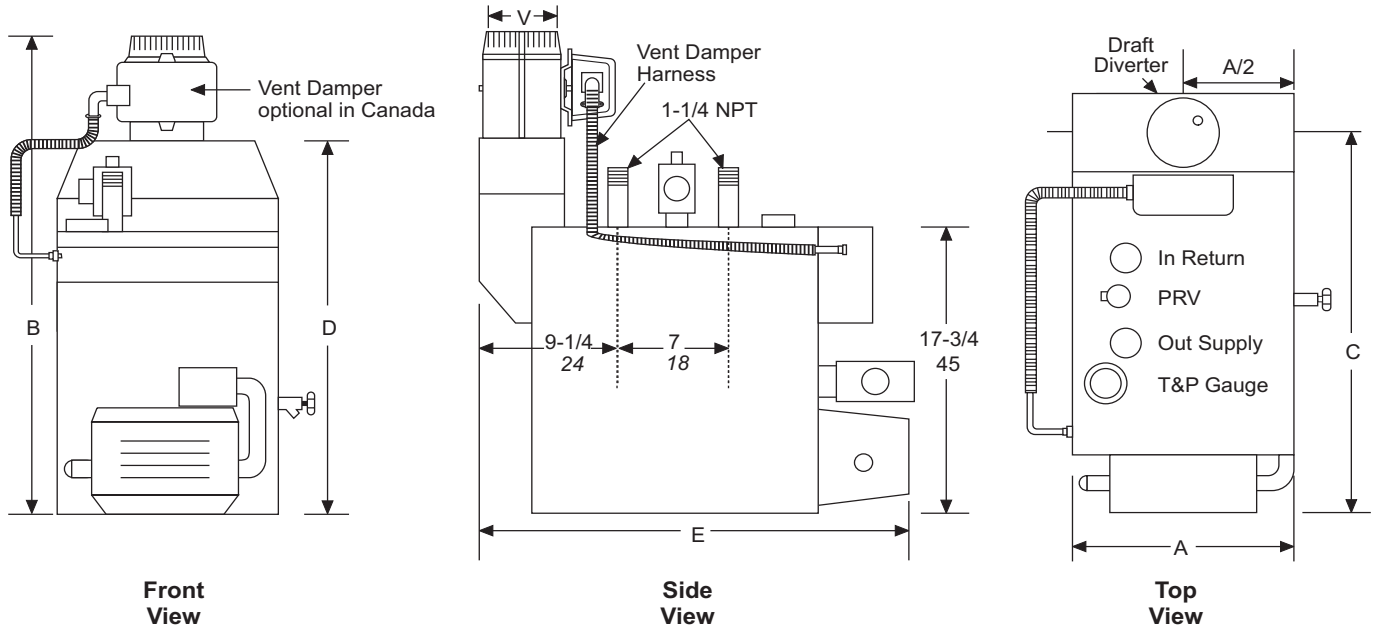

Dimensions shown in inches *cm*.

Size	Dimensions inches <i>cm</i>										Approx Weight			
	A		B		C		D		E		V		lbs.	kg
50	13-3/8	34	27-3/4	71	23-5/8	60	21-3/4	55	26-1/2	67	4	10	120	54
75	13-3/8	34	27-3/4	71	24-1/8	61	21-3/4	55	27-1/2	70	5	13	126	57
100	16-7/8	43	28-3/4	73	24-1/8	61	22-3/4	58	27-1/2	70	5	13	134	61
125	16-7/8	43	28-3/4	73	23-5/8	60	22-3/4	58	27-1/2	70	6	15	138	63
160	20-3/8	52	28-3/4	73	23-5/8	60	22-3/4	58	27-1/2	70	6	15	164	74
225	25-5/8	65	31-1/2	80	23-1/4	59	24-3/4	63	27-1/2	70	7	18	181	82

Size	Input		Heating Capacity				AFUE %		Water Conn. in.	Gas Conn.
	MBTU/h	kW	Nat Gas		Propane Gas		Nat Gas %	Prop Gas %		
50	50	14.7	43	12.6	43	12.6	85.0	85.4	1-1/4	1/2
75	75	22.0	64	18.8	64	18.8	85.0	85.2	1-1/4	1/2
100	100	29.3	85	24.9	85	24.9	85.0	85.0	1-1/4	1/2
125	125	36.6	106	31.1	106	31.1	85.0	85.0	1-1/4	1/2
160	160	46.9	136	39.8	136	39.8	85.0	85.0	1-1/4	1/2
225	225	65.9	191	56.0	190	55.7	85.0	85.0	1-1/4	3/4*

*1/2" for propane



Bradford White Heating Systems Company reserves the right to change specifications, components, features, or to discontinue products without notice.

Bradford White reserves the right to change specifications, components, features, or to discontinue products without notice.



200 Lafayette St.
Middleville, MI 49333
Warranty: (800) 531-2111

www.BradfordWhite.com

Litho in U.S.A. © Bradford White 1508 Document 1040Z-BW