

- One Set of Supply Connections Required for Six Stations
- Preassembled, Complete with Drain Fitting

### Specifications

#### Materials

All exposed parts are type 304 stainless steel or polished chrome-plated brass. Valve manifold is cast brass. Drain fitting is cast iron and supply inlets are copper tubing.

### Standard Equipment

#### Flow Control

A 2.0 GPM (7.6 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.5 GPM (9.5 LPM) Max.

#### Column Shower

Constructed of type 304 stainless steel. Column and column cap are 16 gauge, and base flange is 13 gauge. Access panel located near bottom of column. Each station on column shower equipped with a stainless steel soap tray.

#### Drain Fitting

Cast iron with five stainless steel mounting bolts.

#### Supply Inlets

Constructed of 3/4" type "L" copper tubing.

### Optional Privacy Compartments

#### Partitions

Fabricated of 20 gauge 300 series stainless steel sheets polished to a #4 finish. Sandwich type construction with waterproof cores securely bonded between sheets. Partitions are secured to posts with 14 gauge type 300 stainless steel stirrups and stainless steel screws.

#### Posts

Fabricated 18 gauge 1-1/4" square x 80" stainless steel tubing. Post is secured to floor with an expansion anchor and a concealed foot angle which allows plus or minus 1/2" vertical adjustment.

#### Curtains

Curtain rails fabricated of 300 series #4 finish stainless steel cylindrical tubing. Curtain hooks are steel wire with a zinc chromate finish. Curtains are 60" W x 74" H and fabricated of heavy gauge translucent vinyl with hemmed edges and aluminum grommet reinforced eyelets.




#### Hardware

All exposed fasteners are vandal-proof stainless steel. Post shoes are anodized aluminum and finished to match stainless steel.



### 6-Person Multi-Stall Dimensions

(mm)

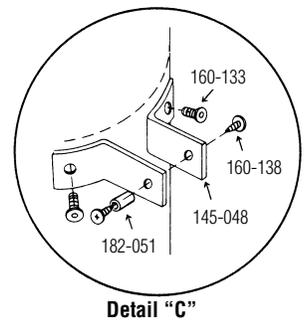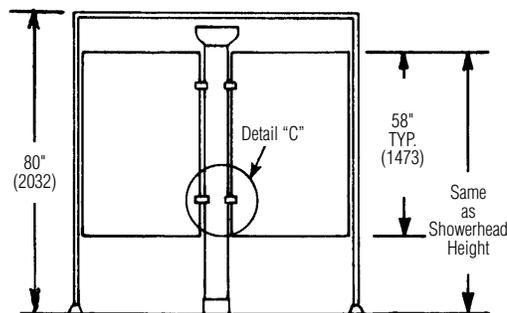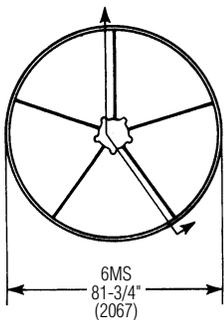


<b>Standard Selections</b> (Must select one from each category)	
<b>Drain Type (select one)</b>	
<input type="checkbox"/> <b>A</b>	Off-line vent with supplies from below
<input type="checkbox"/> <b>B</b>	Centrally rising vent with supplies from above
<input type="checkbox"/> <b>H</b>	Centrally rising vent with supplies from below
<input type="checkbox"/> <b>O</b>	Off-line vent with supplies from above
<b>Showerhead Height (select one)</b>	
<input type="checkbox"/>	6'-0" Standard Height
<input type="checkbox"/>	5'-6" Juvenile Height
<b>Valve Type (select one)</b>	
<i>Hot/Temperead and Cold Supplies</i>	
<input type="checkbox"/> <b>EF</b>	Equa-Flo Pressure Balancing Valve
<input type="checkbox"/> <b>HD</b>	Equa-Flo HD Pressure Balancing Valve
<input type="checkbox"/> <b>TMV</b>	Thermostatic Mixing Valve
<input type="checkbox"/> <b>HC</b>	Hot and Cold Compression Valve*
<i>Single Temperead/Cold Supply</i>	
<input type="checkbox"/> <b>AST</b>	Air Metering Valve
<input type="checkbox"/> <b>SV</b>	Single Compression Valve
<input type="checkbox"/> <b>TT</b>	TouchTime® Metering Valve**

<b>Optional Selections</b>	
<b>Showerhead Variations</b>	
<input type="checkbox"/> <b>SX</b>	Severe Service Showerhead
<input type="checkbox"/> <b>SF</b>	Deluxe Showerhead with Ball Joint
<input type="checkbox"/> <b>ES</b>	Economy Soft Flow with Ball Joint
<b>Flow Control (Not available with SF Showerhead)</b>	
<input type="checkbox"/> <b>G</b>	1.5 GPM (5.7 LPM) Flow Control
<b>Volume Control (Not available with SX or ES Showerhead)</b>	
<input type="checkbox"/> <b>AKV</b>	Allen Key Volume Control
<input type="checkbox"/> <b>THV</b>	T-Handle Volume Control
<b>Ball Joint (Not available with SX or ES Showerhead)</b>	
<input type="checkbox"/> <b>LBJ</b>	Lockable Ball Joint
<b>Drain Variations</b>	
<input type="checkbox"/> <b>CR</b>	Clamping Ring for Flashing
<input type="checkbox"/> <b>DG</b>	Dome Grate Drain
<b>Miscellaneous</b>	
<input type="checkbox"/> <b>ST</b>	Stops in Supplies
<input type="checkbox"/> <b>SH</b>	Telescoping Shroud
<input type="checkbox"/> <b>FAK</b>	Flange Anchor Kit
<input type="checkbox"/> <b>LD</b>	Less Column Drain
<input type="checkbox"/> <b>LS</b>	Less Drain Slots*
<b>Multi-Stall Partitions</b>	
<input type="checkbox"/> <b>MS</b>	Multi-Stall Partitions
<b>Multi-Stall Options</b>	
<input type="checkbox"/> <b>HR</b>	Herculite Curtain
<input type="checkbox"/> <b>RH</b>	Roller Hooks
<input type="checkbox"/> <b>BH</b>	Robe Hook

\*Non-cancelable, non-returnable

\*\*AZ and TT valves require optional 24V Class 2 transformers, available as a separate item from Bradley. PT (S83-134) 24V Plug In Transformer (1/2 amp) Up to 2 showers. 4RT (S45-2045) 24V Remote Transformer (2amp) Up to 4 showers.

**Drain Variations<sup>§</sup>**

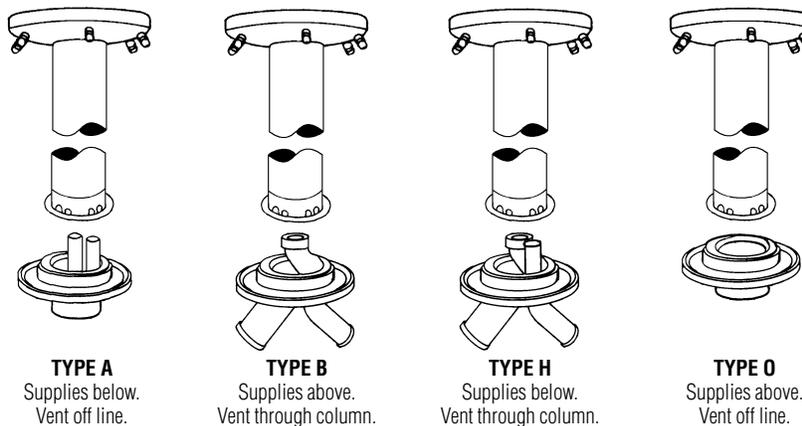

<sup>§</sup>See Document No. 5140 for drain rough-ins and column installation instructions.