



LD-3010 OmniDeck™ – 3000 Series

- Bowl(s) and Deck are constructed of Terreon® or Terreon®RE Solid Surface Material
- Decks are Pre-fabricated; Shipped Complete to the Job Site
- Custom and Standard Sizes Available
- ADA and ANSI Compliant
- Coved Backsplash and Integral Front Apron Eliminate Caulk Lines
- Integral bowl options create seamless look

Specifications

The OmniDeck Model LD-3010 can accommodate one or more users. Model LD-3010 OmniDecks feature a Terreon solid surface deck with optional integral oval or rectangular bowl(s). The OmniDeck comes equipped with drillings for either 4" centerset, 8" centerset or centershank faucet drillings, or can be equipped with optional deck-mount faucets. Optional aprons, splashes, mounting brackets, single-station trap covers and deck mounted soap dispensers are also available to round out the total package.

Construction

Deck

Constructed of ½" thick Terreon, a densified solid surface material composed of polyester resin or TerreonRE, a densified solid surface material composed of a bio-based resin and preconsumer recycled granules. Terreon and TerreonRE are resistant to chemicals, stains, burns and impact. Surface damage can be easily repaired with everyday cleansers or fine grit abrasives. Terreon and TerreonRE are certified by NAHB to meet ANSI Z124.3, Z124.6 and ANSI/ICPA SS-1-2001. Terreon and TerreonRE are GREENGUARD® certified as low-emitting materials.

Terreon Bowls

Basin Model	Dims.	Depth*	Molded Overflow	Strainer Size**	Drain Size**
SL Series					
SL-T01	16" x 13"	5½"			
SL-TR1	17" x 14"	5⅞"	Yes	2⅜" Ø	1¼"
HS Series					
HS-T01	22" x 14"	5⅝"			
HS-TS1	14" x 14"	5⅝"			
HS-TR1	22" x 16"	5⅝"	No	4¼" Ø	1½"

* From top of deck to top of strainer

** When specified with drain assembly (D-ASSY)

The SL-TR1 includes an attractive 30° beveled edge transition to the deck.

Mounting Options


OmniDecks are designed for a variety of mounting options which include Terreon carrier sleeves (concealed arm carriers by others), 12 gauge stainless steel mounting brackets (to allow for easy install and future removal of deck) or traditional wall cleating (by others). These mounting options eliminate the need for casework options beneath the deck. Bracket or sleeve quantity is dependent on deck length. 2" to 45" = 2 brackets, 45.25" to 75" = 3 brackets, 75.25" to 105" = 4 brackets and 105.25" to 120" = 5 brackets

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

Page 1 of 7 4/1/2016

This information is subject to change without notice.

Bradley_Sink_OmniDeck_LD-3010

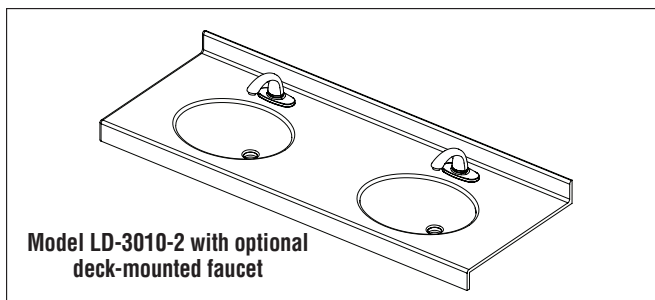

Trap Cover Option

The Single-Station Trap Cover is constructed of stainless steel with a #4 finish and is mounted with ¼"-20 fasteners (supplied by others) into wall anchors (supplied by others). In order to allow for easy access to soap cartridges, the soap is not concealed by the SL-TR1 and HS-Series trap covers. The SL-T01 trap cover does conceal the soap.

Seaming

Seaming is required for OmniDecks with a total length over 120". Seaming is the process of joining two or more solid surface components together with an inconspicuous seam. Optional adhesive seam kits, available from Bradley, are made to match any Terreon color.

Code Compliance and Certifications

ANSI Standards

Terreon and TerreonRE are Home Innovation Lab Certified to meet ANSI Z124.3, Z124.6 and ANSI/ICPA SS-1-2001.

National and International Plumbing Approval

OmniDecks are Uniform Plumbing Code (UPC), International Plumbing Code (IPC) and National Plumbing Code of Canada (NPC) approved through the International Association of Plumbing and Mechanical Officials (IAPMO). Manufactured in compliance with IGC 156, CSA B45 Series & ASME A112.18.1/CSA B125.1.

ADA Height Mounting

To comply with ADA, the rim height of the LD-3010 OmniDeck, and at least one bowl, must be 34" maximum (31" maximum for Juvenile ADA) above the finished floor and must have proper reach, knee and toe clearances. Always review local codes for compliance.



This plumbing fixture is designed for hand washing only. It is not Intended to dispense water for human consumption through drinking or for preparation of food or beverages.



Standard product selections contained within this document are third party **CERTIFIED** to NSF/ANSI 372 meeting the Lead-Free content requirement. Any product configured with custom options will be **COMPLIANT** with NSF/ANSI 372 meeting the Lead-Free content requirement.



© 2016 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000





bradleycorp.com



LD-3010 OmniDeck™ – 3000 Series

LD-3010 Dimensions (Side View)

☒ Surface mount brackets shown. Also available with carrier sleeves for concealed in wall carriers.

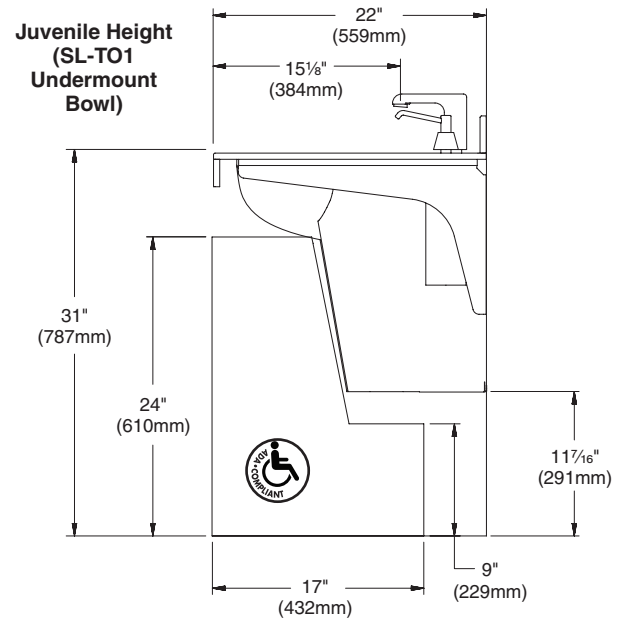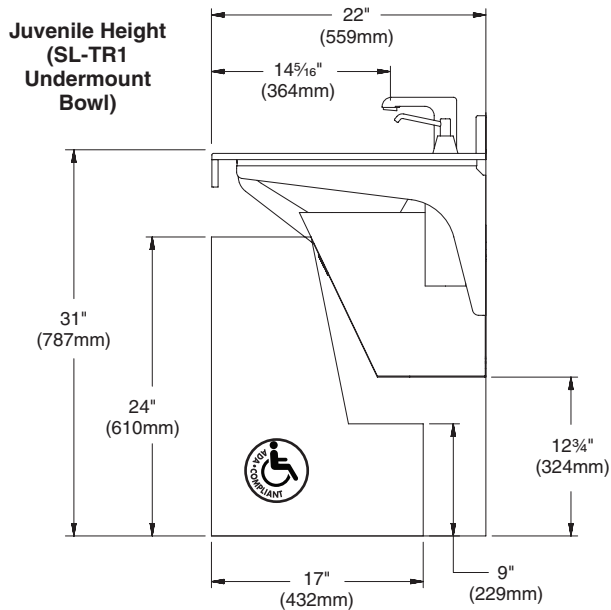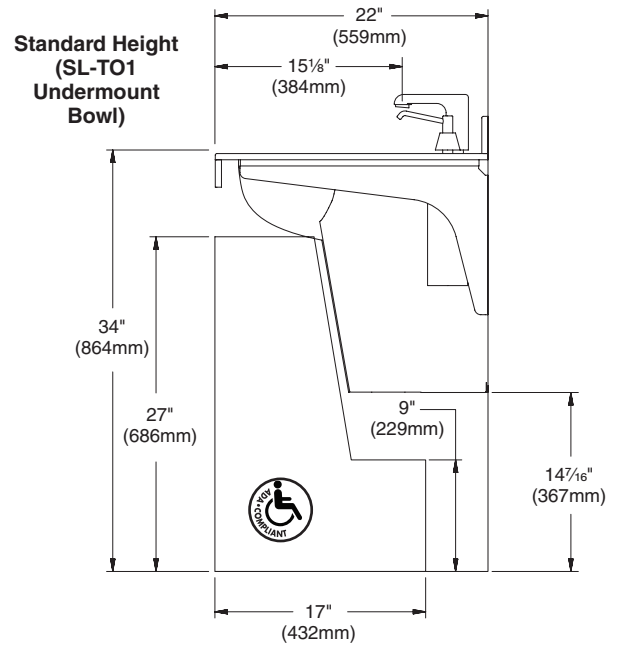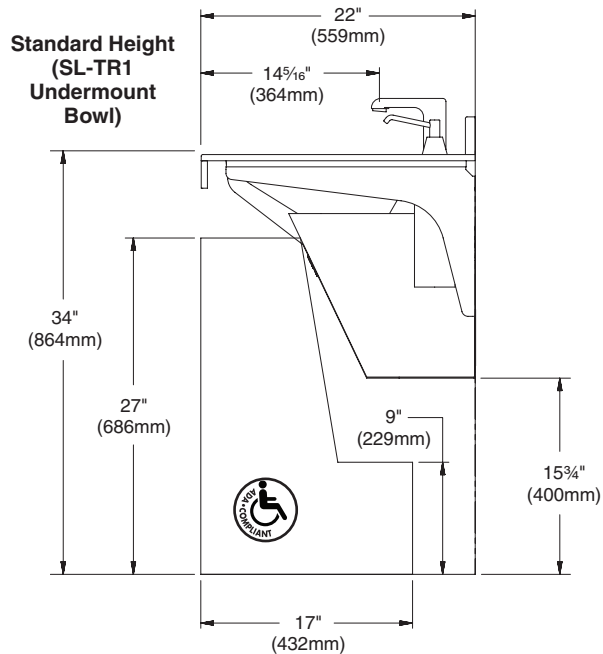

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to
local and national codes is the responsibility of the installer.







LD-3010 OmniDeck™ – 3000 Series

LD-3010 Dimensions (Side View)



Surface mount brackets shown. Also available with carrier sleeves for concealed in wall carriers.

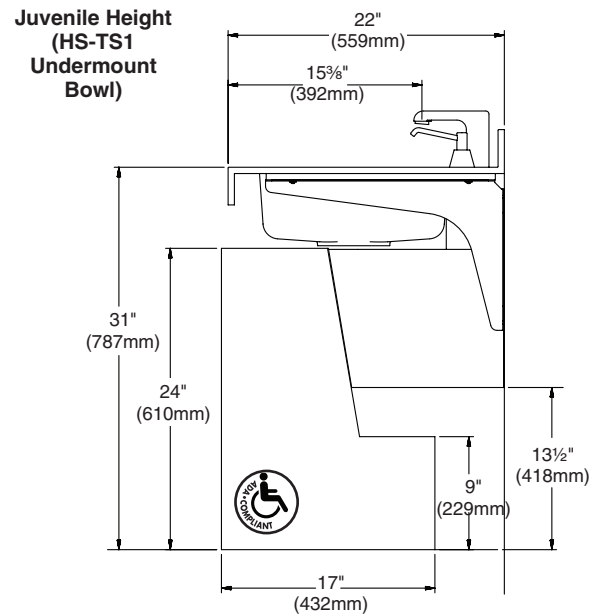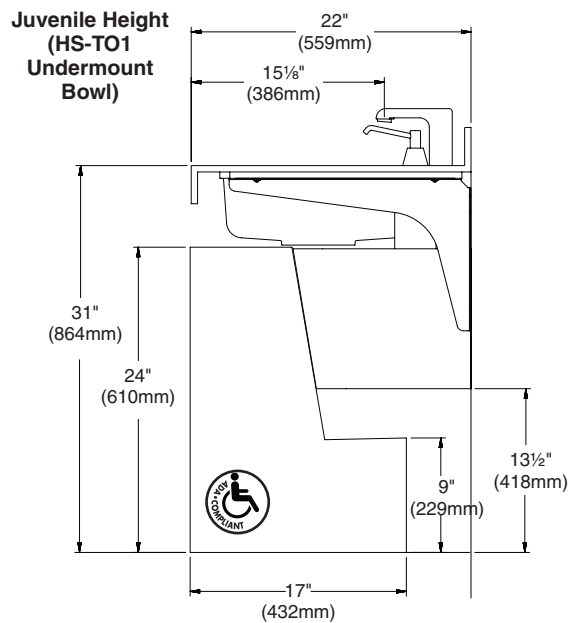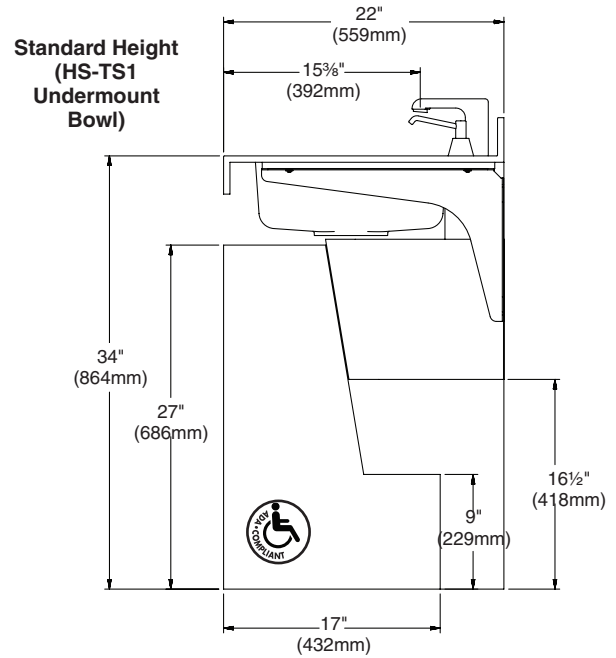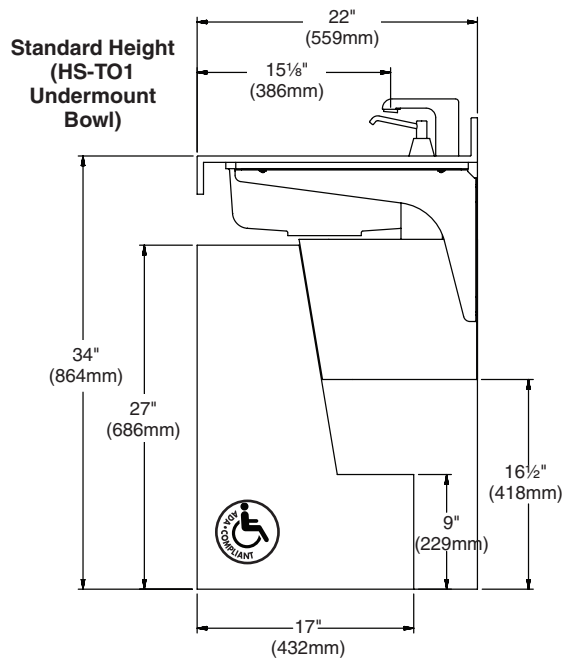



Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to
local and national codes is the responsibility of the installer.



LD-3010 OmniDeck™ – 3000 Series

LD-3010 Dimensions (Side View)

☒ Surface mount brackets shown. Also available with carrier sleeves for concealed in wall carriers.

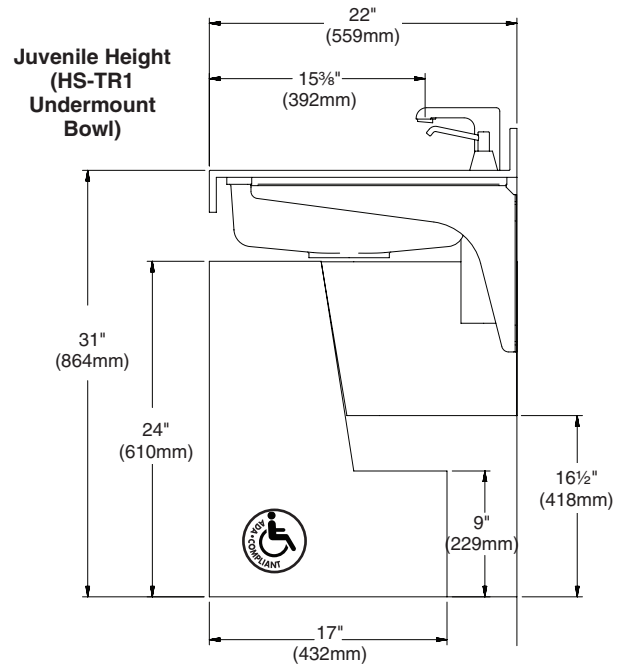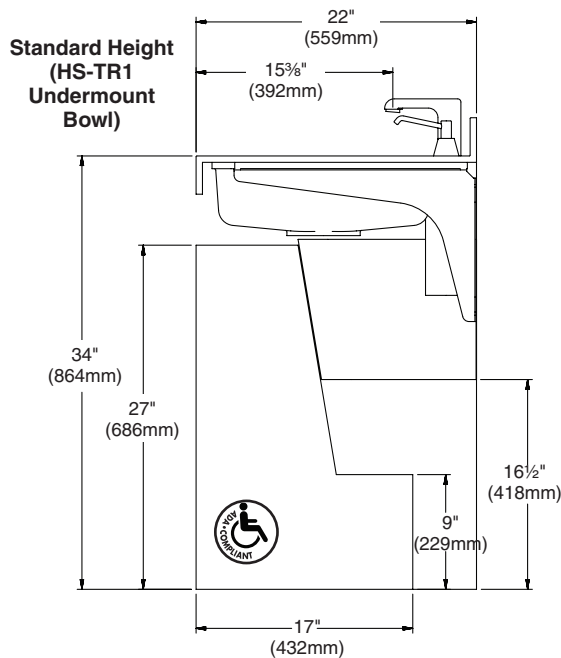


LD-3010 Deck and Bowl Details

Sample Configurations shown with Roundover Profile

Key	Description
L	Length of Deck
D	Depth of Deck
B1	Bowl #1 Placement
B2	Bowl #2 Placement
BWP*	Bowl and Waste Position
WP	Waste Placement (centered with bowl position)
SH	Splash Height
AH	Apron Height

* BWP default dimensions is 13" for SL-T01 bowl option. 12" for all other bowl options.

- ☒ Dimensions must be specified to the nearest 1/4".
- ☒ A separate tech data document is required for each deck. Decks over 120" are seamed in the field.

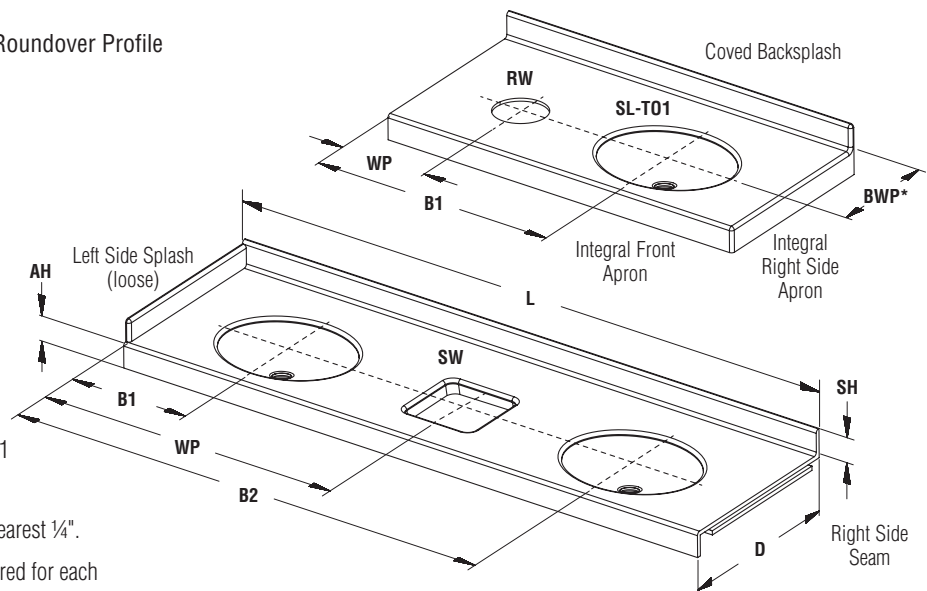


Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.




LD-3010 Product Option Component Clearance

- ☒ Use these drawings as a guideline to ensure your deck length can accommodate your option configuration.

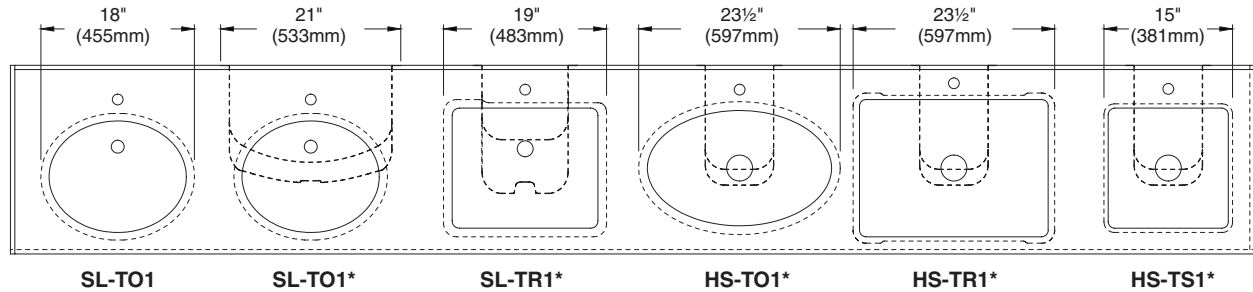

*Shown with trap cover

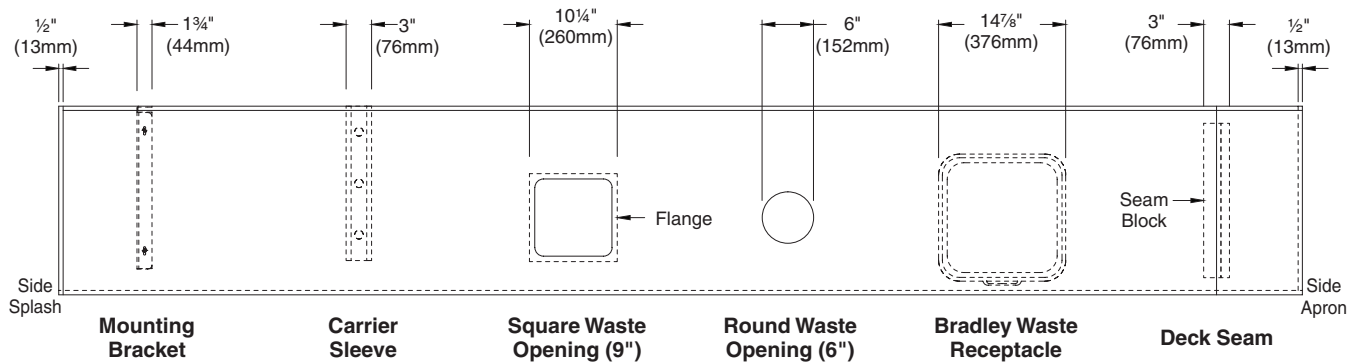

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to
local and national codes is the responsibility of the installer.



LD-3010 OmniDeck™ – 3000 Series

Standard Selections (Must select one from each category)

- ☒ All OmniDecks are non-cancelable and non-returnable.
☒ Submittal drawings not required for product configured to technical data options but available upon request.

Configuration

NOTE: Changes to predetermined dimensions require modified unit.

- ☐ Standard ☐ Modified

Number of Bowls

- ☐ 1 One Bowl ☐ 2 Two Bowls
☐ 3 Three Bowls ☐ 4 Four Bowls
☐ 0 No Bowl

Bowl Type

- ☐ SL-T01 SL Oval Undermount
☐ SL-TR1 SL Rectangular Undermount
☐ HS-T01 HS Oval Undermount
☐ HS-TS1 HS Square Undermount
☐ HS-TR1 HS Rectangular Undermount
☐ NONE No Bowl

Length (L)

- ☐ 30" (Standard) ☐ 60" (Standard)
☐ 90" (Standard) ☐ 120" (Standard)
☐ Modified " (must not exceed 120")

Depth (D)

- ☐ 22" Standard (minimum)
☐ Modified " (must be between 22.25" and 25" if bowl option is selected)

Bowl Placement

- ☐ B1 (Bowl #1) 15" Standard ☐ Modified "
☐ B2 (Bowl #1) 45" Standard ☐ Modified "
☐ B3 (Bowl #1) 75" Standard ☐ Modified "
☐ B4 (Bowl #1) 105" Standard ☐ Modified "

Waste Receptacle Openings

- ☐ One Opening ☐ Two Openings
☐ Three Openings ☐ No Opening

Waste Opening Type

- ☐ SW 9" Square w/Flange ☐ RW 6" Round; no Flange
☐ RWC 6" Round w/Stn. Steel Chute

Waste Placement (WP)

- ☐ WP1 " ☐ WP3 "
☐ WP2 "

NOTE: Due to space limitations, waste openings cannot be placed in-between **standard** bowl placements.

Backsplash (greater than 5" is shipped loose)

- ☐ BS Backsplash ☐ NBS No Backsplash

Side Splashes (shipped loose)

- ☐ RSS Right Side Splash ☐ BSS Both Side Splashes
☐ LSS Left Side Splash ☐ NSS No Side Splash

Splash Height

- ☐ 3" Standard ☐ Modified "

Front Apron

- ☐ FA Front Apron ☐ NFA No Front Apron

Side Apron

- ☐ LSA Left Side Apron ☐ BSA Both Side Aprons
☐ RSA Right Side Apron ☐ NSA No Side Apron

Apron Height (greater than 10" is shipped loose)

- ☐ 3" Standard ☐ Modified "

NOTE: Aprons 5" to 10" are reinforced with gussets.

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to
local and national codes is the responsibility of the installer.

Page 6 of 7 4/1/2016

This information is subject to change without notice.

Bradley_Sink_OmniDeck_LD-3010

© 2016 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



LD-3010

OmniDeck™ – 3000 Series

Standard Selections (Must select one from each category)

- ☒ All OmniDecks are non-cancelable and non-returnable.
- ☒ Submittal drawings not required for product configured to technical data options but available upon request.

Faucet

- ☐ **4" Set** 4" Centerset (1¼" Drilling Only)
- ☐ **8" Set** 8" Centerset (1¼" Drilling Only)
- ☐ **SHANK** Centershank (1¼" Drilling Only)
- ☐ **NFD** No Drilling

Soap Option

- ☐ **6324** 16-oz. Plastic Globe, 4" Spout
- ☐ **6324-67** 16-oz. Stainless Steel Globe, 4" Spout
- ☐ **6324-68** 32-oz. Plastic Globe, 4" Spout
- ☐ **6315** Sensor-Operated Soap Dispenser
- 6315 soap bottle is ordered separately. Visit bradleycorp.com for more information.*
- ☐ **SDO** 1¼" Soap Drilling Only
- ☐ **NSD** None

Color of Terreon Deck (select one):

Standard Colors

- | | | | |
|--|----------------|--|----------------|
| <input type="checkbox"/> ALP-WHT | Alpine White | <input type="checkbox"/> LONDON | London Gray |
| <input type="checkbox"/> AVALANCHE† | Avalanche | <input type="checkbox"/> MOONSTONE† | Moonstone |
| <input type="checkbox"/> BONE | Mesa Bone | <input type="checkbox"/> O-TAUPE | Organic Taupe |
| <input type="checkbox"/> CHAR | Charcoal Gray | <input type="checkbox"/> PEBBLE | Pebble Beach |
| <input type="checkbox"/> COBBLE | Cobblestone | <input type="checkbox"/> PEP-WHT | Peppered White |
| <input type="checkbox"/> DRIFT† | Driftwood | <input type="checkbox"/> POLAR† | Polar Ice |
| <input type="checkbox"/> DS-WHT | Designer White | <input type="checkbox"/> SAND | Sandtrap |
| <input type="checkbox"/> DUNE† | Sand Dune | <input type="checkbox"/> S-CREEK | Stone Creek |
| <input type="checkbox"/> E-GRAY | Empire Gray | <input type="checkbox"/> S-MIST | Silver Mist |
| <input type="checkbox"/> GLACIER | Glacier | <input type="checkbox"/> WHT-SAND | White Sand |
| <input type="checkbox"/> GRAPH | Graphite | | |
| <input type="checkbox"/> LANNON | Lannonstone | | |

Designer Colors (available at an additional charge)

- ☐ **ARC-CHIP** Arctic Chip
- ☐ **COFFEE** Coffee Bean
- ☐ **RIVER** Riverstone

TerreonRE Colors (available at an additional charge)

- ☐ **BIRCH-BARK** Birch Bark
- ☐ **MOONDUST** Moondust
- ☐ **DUSK** Dusk
- ☐ **OAT** Oat

Will Tempered Water Be Supplied to This Unit?

This question must be answered to determine bowl color options (see below).

- ☐ **TEMP** Tempered (less than 110°F or 43°C)
- ☐ **NO-TEMP** Not Tempered

Color of Terreon Bowl

- ☐ **ALP-WHT** Alpine White
- ☐ **BONE** Mesa Bone
- ☐ **DS-WHT** Designer White
- ☐ **SAME** Same as Deck (Requires Tempered Water)
- ☐ **LONDON GRAY** London Gray
- ☐ **O-TAUPE** Organic Taupe

Edging

- ☐ **EE** Ease Edge
- ☐ **RO** ¾" Radius Roundover

NOTE: Sidesplashes sit lower than the backsplash when RO option is selected. If wall is to be tiled after deck installation, EE option is recommended.

Mounting Options

- ☐ **SLV*** Carrier Sleeves
- ☐ **BRKT*** Stainless Steel Bracket(s)
- ☐ **NONE** Customer-Supplied Mounting

Waste Receptacle

- ☐ **WR** 377-363700 (21 Gallon Capacity Waste Receptacle)
- ☐ **NONE** No Receptacle

NOTE: Waste receptacles are only available on units with a 34" rim height and 4" or less front apron.

Contoured Trap Cover

- ☐ **LD-TRAP** Stn. Steel Trap Cover
- ☐ **NONE** No Trap Cover

P-Trap

- ☐ **P-TRAP-C** Chrome-Plated Brass
- ☐ **NONE** No P-trap
- ☐ **P-TRAP-P** Polypropylene

Drain Assembly (Required with SL-TR1 and LD-TRAP combo)

- ☐ **D-ASSY** Drain Assembly
- ☐ **NONE** No Drain

Seaming

- ☐ **SEAM-R** Seam Right
- ☐ **SEAM-L** Seam Left
- ☐ **SEAM-LR** Seam Left and Right
- ☐ **NONE** No Seaming

Seaming Kit (180 Day Shelf Life - Each kit will accommodate a 30" seam)

- ☐ **AS-K** Seam Kit
- ☐ **NONE** No Seam Kit

* Bracket or sleeve quantity is dependent on deck length. 2" to 45" = 2 brackets, 45.25" to 75" = 3 brackets, 75.25" to 105" = 4 brackets and 105.25" to 120" = 5 brackets

† This color contains large, randomly distributed chips.

Verify all rough-in dimensions prior to installation.
Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.