

Grab bar:

- Model SA70-001180 (18" long)
- Model SA70-001240 (24" long)
- Model SA70-001360 (36" long) **Bradex®**
- Model SA70-001420 (42" long) **Bradex®**
- Model SA70-002600 (60" long)

Product Materials

FLANGES: 3/8" dia. 11 gauge stainless steel, with exposed surfaces in architectural satin finish.

TUBING: 1 1/2" O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass through the flanges and are welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by welding to form an integral part of the grab bar. All welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter. Return provides 1 1/2" standard safety clearance between wall and bar.

CLOSURE PLATE: 11 gauge stainless steel.

Strength

When properly mounted, all Bradley heavy duty grab bar systems meet or exceed the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS). In addition, the following configurations can support up to 1,000 pounds: -001, -054; -055; -059; -060. (Please see Bradley's web site for more information on all grab bar configurations.)

Installation

Verify all rough-in dimensions prior to installation. Use bar as template to locate mounting holes. Unit supplied with 1/4" - 20 x 1 1/2" T27 torx head machine screws for installation to wall anchors (not included).

Optional Features

Feature	Suffix
<input type="checkbox"/> Safety-grip finish	-2


Guide Specification

Security grab bar shall be fabricated of 1 1/2" O.D. satin finish stainless steel with exposed mounting flanges and 11 gauge stainless steel closure plate in sizes and configurations as indicated. Furnished with torx-head mounting screws.

Washroom Accessories
Document No. 9310

This information is subject to change without notice.
Always consult local and national codes for proper installation guidelines. Conformity and compliance to local and national codes is the responsibility of the installer.

10-12-2011

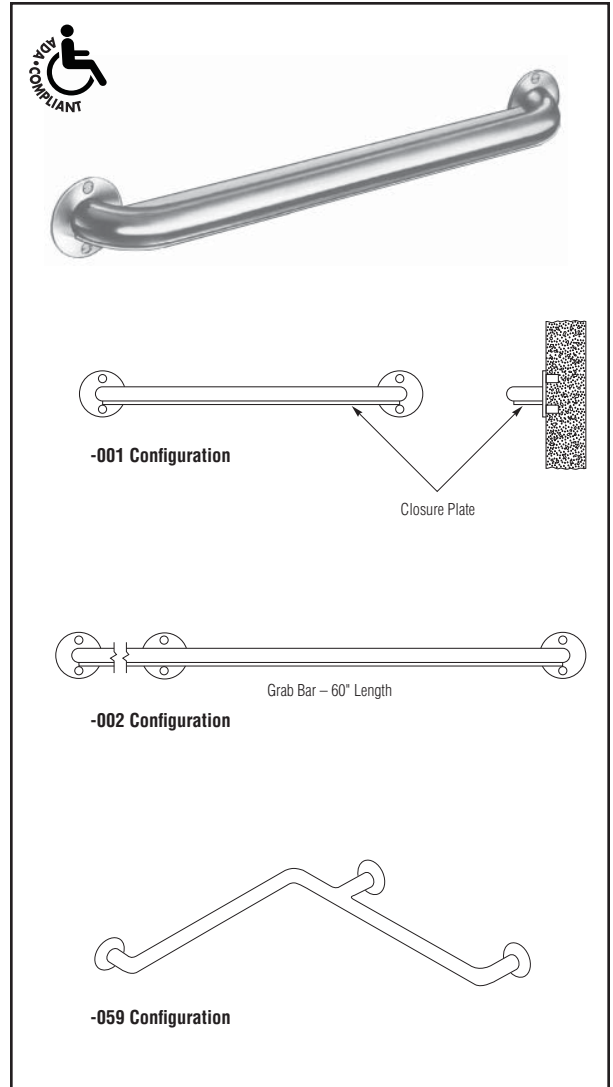

ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **Bradex®** will be available to ship in one week after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

© 2011 Bradley Corporation
P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone: 800.BRADLEY (800.272.3539) Fax: 262.253.4161
bradleycorp.com