

- cUPC Certified
- Available in Semi-Circular or Circular with 9" Deep Bowls
- Designed for Heavy Duty Hand Washing
- Available in 54" or 36" Diameter Bowl Size
- Foot, Air Metering, Infrared, or TouchTime® Control

Specifications

Size and Capacity

Semi-circular models accommodate up to 3 users (36" models) or 4 users (54" models) at a time. Circular models accommodate up to 5 users (36" models) or 8 users (54" models) at a time. All models utilize less water, energy and space than lavatories equipped with conventional faucets. The operating range is 20-80 PSI. Flow rate controlled by volume control valve. Approximate flow-rates for each model:

- 36" semi-circular: 1.25 GPM
- 54" semi-circular: 3 GPM
- 36" circular: 2 GPM
- 54" circular: 5 GPM

Construction

Bowl: Composed of approximately 85% stone and 15% binder with steel reinforcing rods cast into the bowl. Polished and sealed with urethane resin.

Pedestal: Constructed of die-formed legs, upper braces, scuff bases and panels: legs are zinc chromate plated 14 gauge steel; upper braces are 16 gauge galvanized steel; and scuff bases and pedestal panels are 300 series stainless steel with a #4 finish.

Standard Equipment

Valves and Fittings

In addition to the bowl and pedestal, the following valves and fittings are standard: sprayhead with stainless steel support tube and bowl gasket; spud with domed strainer; sprayhead supply line; manual mixing valve; volume control valve; and (2) stop, strainer and check valves.

Activation Controls

Foot Control


Each press of the foot rail mechanically actuates a hold-open valve, with slow closing upon release of foot pressure.

Air Valve Hand Control

Each push button pneumatically actuates a non-hold-open, air metering, single-temperature valve with field adjustable timing from 0–45 seconds. Factory preset at 10 seconds. Each push button activates a flow of tempered water from the non-sectional sprayhead. Push button requires less than five pounds of pressure.

Infrared Control

Hands placed within the bowl are detected by an infrared sensor module which activates a flow of tempered water from the non-sectional sprayhead. Shut-off is automatic seven seconds after hands are removed from detection area. The infrared sensor uses a conical-shaped transmitting beam, having a detection area adapted to, but not exceeding, the bowl perimeter. The detection area projects forward 15° to each side and 15° below and extends 6 to 9 inches from the sensor module. The infrared sensor is not affected by varying color tones or darkness. Direct sunlight or bright washroom lights will not activate the system. Infrared models also include solenoid valves and a low-voltage transformer as standard equipment:

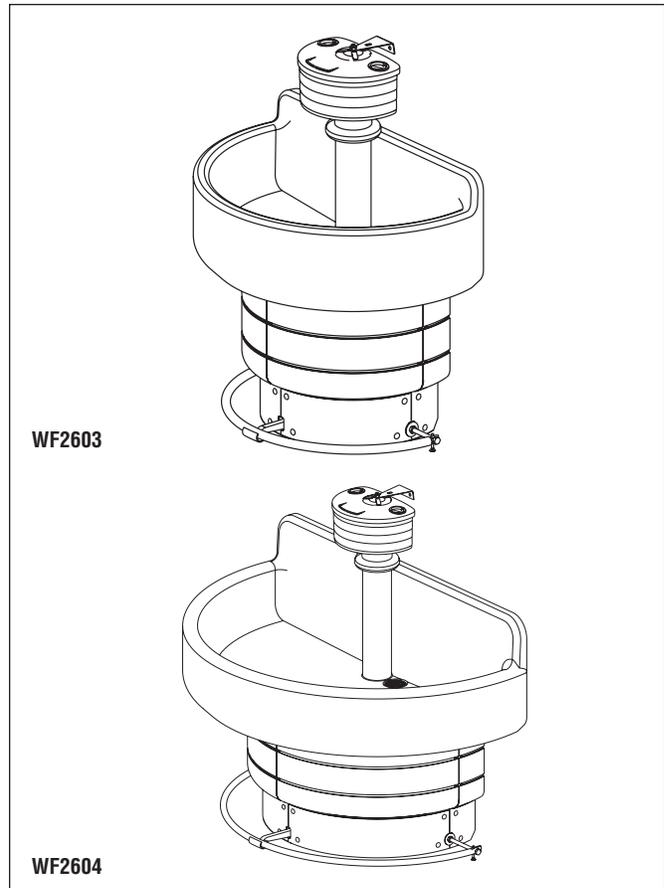

- Solenoid – 24V, 50/60 Hz, 3/4" NPT. Few moving parts, and resistant to most chemicals, minerals, and impurities often present in municipal water supplies.
- Low-Voltage Transformer – Class II UL/CSA listed, 110/24 VAC plug-in transformer. Plugs into a standard GFCI protected electrical outlet. Location of transformer per local electrical code.

TouchTime® Hand Control

Each low-voltage button actuates a non-hold-open, slow-closing anti-hammer solenoid valve that is timed from an electronic potted assembly. Each push button activates a flow of tempered water from the non-sectional sprayhead. TouchTime® controls water flow at each station through the use of solid state, digital circuitry. Timing is electronically controlled at 15 seconds. Push button requires less than five pounds of pressure.

Code Compliance

cUPC Approval

Pre-Assembled Classic Washfountains are Uniform Plumbing Code (UPC), International Plumbing Code (IPC) and National Plumbing Code of Canada (NPC) approved through the International Association of Plumbing and Mechanical Officials (IAPMO). Manufactured in compliance with IGC 156-2009, CSA B45 Series-2002 (R08) & ASME A112.18.1-2005/CSA B125.1-2005.




| Models (Must select one) | | | |
|---------------------------------|-------------------|-------|----------|
| Model | Size | Users | Material |
| <input type="checkbox"/> WF2603 | 36" Semi-Circular | 3 | Terrazzo |
| <input type="checkbox"/> WF2604 | 54" Semi-Circular | 4 | Terrazzo |
| <input type="checkbox"/> WF2605 | 36" Circular | 5 | Terrazzo |
| <input type="checkbox"/> WF2608 | 54" Circular | 8 | Terrazzo |

| Standard Selections (Must select one from each category) | |
|---|--|
| Drain Type (select one) | |
| <input type="checkbox"/> A | Off-line vent with supplies from below |
| <input type="checkbox"/> B | Centrally rising vent with supplies from above |
| <input type="checkbox"/> H | Centrally rising vent with supplies from below |
| <input type="checkbox"/> O | Off-line vent with supplies from above |
| Pedestal Height (select one) | |
| <input type="checkbox"/> STD | Standard Height |
| <input type="checkbox"/> JUV | Juvenile Height |
| Controls (select one) | |
| <input type="checkbox"/> F | Foot Control Valve |
| <input type="checkbox"/> IR | Infrared Activation |
| <input type="checkbox"/> AST | Air Valve Metering |
| <input type="checkbox"/> TT | TouchTime [®] Metering |
| Mixing Valve (select one) | |
| <input type="checkbox"/> MMV | Manual Mixing Valve |
| Soap Dispenser (select one) | |
| <input type="checkbox"/> PSD | Powdered Soap Dispenser |
| <input type="checkbox"/> NSD | No Soap Dispenser |
| <input type="checkbox"/> LSD | Liquid Soap Dispenser |
| Terrazzo Bowl Color (select one) | |
| <i>Standard Colors</i> | |
| <input type="checkbox"/> GRANITO | Granito (Beige) |
| <input type="checkbox"/> WHT-MARM | White Marmorite |
| <i>Premium Terrazzo Colors* (available at an additional charge)</i> | |
| <input type="checkbox"/> W-GRAY | Whisper Gray* |
| <input type="checkbox"/> D-ROSE | Dusty Rose* |


| Optional Selections | |
|-----------------------------------|--|
| Thermostatic Mixing Valve | |
| <input type="checkbox"/> TMA | Thermostatic Mixing Valve (in lieu of manual mixing valve) |
| Metal Soap Dispenser | |
| <input type="checkbox"/> MLSD | Metal-Clad Liquid Soap Dispenser |
| <input type="checkbox"/> MPSD | Metal-Clad Powdered Soap Dispenser |
| 1-1/2" Tie Pipe Assembly | |
| <input type="checkbox"/> TA | Reinforces Support Tube |
| Shroud | |
| <input type="checkbox"/> SH | Stainless Steel Shroud (Conceals Overhead Piping) |
| Hose Bibb | |
| <input type="checkbox"/> HB | Hose Bibb* |
| Paper Towel Dispensers | |
| <input type="checkbox"/> CTD (2) | C-Fold, Multi-Fold Dispenser |
| <input type="checkbox"/> SFTD (2) | Single-Fold Dispenser |

*Non-cancelable, not-returnable


Semi-Circular Terrazzo WF2603 and WF2604, Circular Terrazzo WF2605 and WF2608

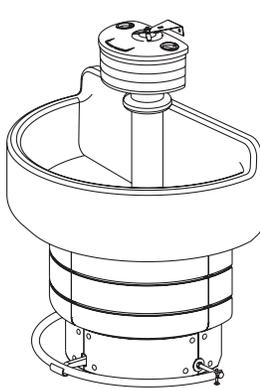


WF2603

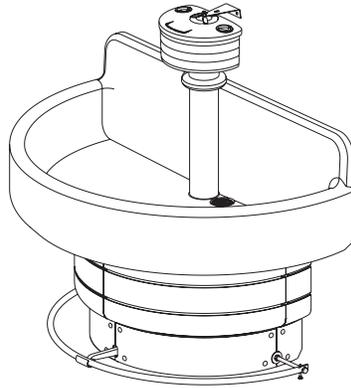

WF2604




WF2605

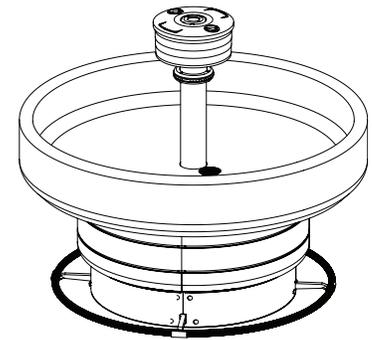

WF2608

Dimensions — Foot Controlled Semi-Circular

(mm)

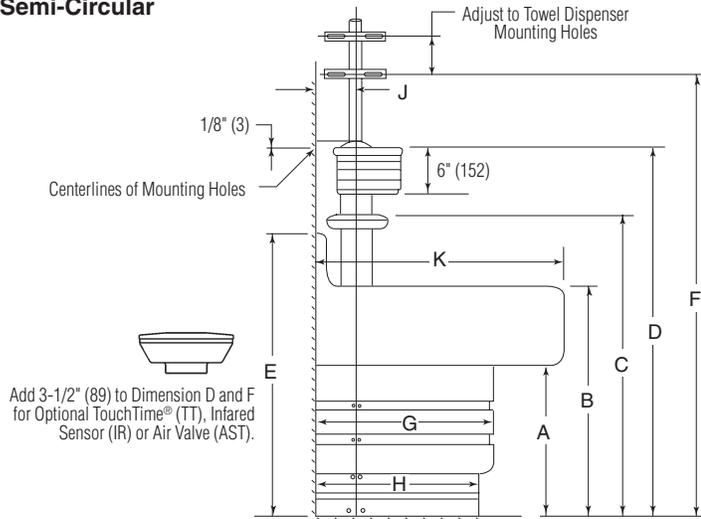


Dimensions – Inches (mm)

| Size | A* | B* | C* | D* | E* | F* | G | H | J | K |
|-----------|----------|--------------|--------------|---------------|--------------|---------------|--------------|--------------|-------------|--------------|
| 54 (1372) | 19 (483) | 29-1/4 (743) | 39-1/8 (994) | 47-5/8 (1210) | 36-1/4 (921) | 56 (1422) | 23-1/4 (591) | 21-1/2 (546) | 5-1/4 (133) | 32-1/4 (819) |
| 36 (914) | 19 (483) | 29-1/4 (743) | 35-5/8 (905) | 44-1/8 (1112) | 33-1/4 (845) | 52-1/2 (1334) | 17-1/4 (438) | 15-1/4 (378) | 4-3/4 (121) | 22-3/4 (578) |

* Juvenile Height: Subtract 4" (102) from dimensions A through F for juvenile height.

Dimensions — Foot Controlled Circular

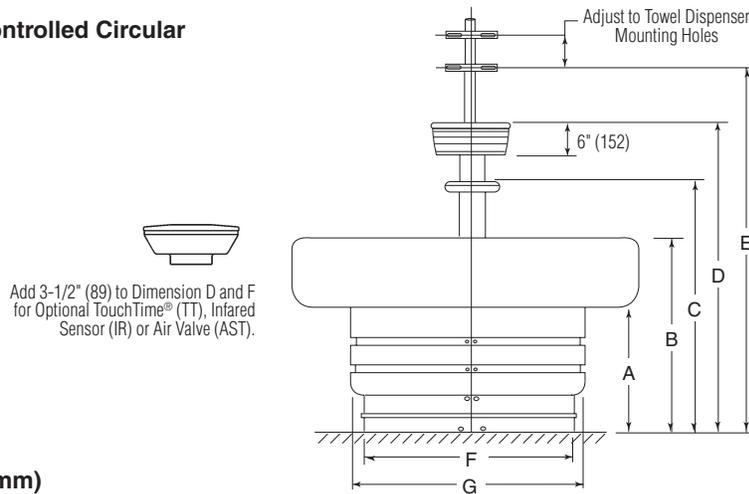

Dimensions – Inches (mm)

| Size | A* | B* | C* | D* | E* | F | G |
|-----------|----------|--------------|--------------|---------------|---------------|----------|----------|
| 54 (1372) | 19 (483) | 29-1/4 (743) | 39-1/8 (994) | 47-5/8 (1210) | 56 (1422) | 32 (813) | 36 (914) |
| 36 (914) | 19 (483) | 29-1/4 (743) | 35-5/8 (905) | 44-1/8 (1121) | 52-1/2 (1334) | 21 (533) | 25 (635) |

* Juvenile Height: Subtract 4" (102) from dimensions A through E for juvenile height.

Rough-In Notes

(mm)


1. All pipes and fittings not furnished by Bradley are shown in broken lines.
2. Supply lines for one to two washfountains should be 1"; for three washfountains 1-1/4"; for more than three washfountains, pipe sizes should be increased proportionately.
3. Overhead supplies must be reduced to 1/2" copper tube to pass through support tube.
4. Check valve inlets are 1/2" NPT.
5. Drain Types B and H: For maximum rigidity of sprayhead/support tube assembly, use 1-1/2" NPT galvanized pipe for vent. Use of plastic or copper for vent is not recommended.

Rough-Ins – Semi-Circular


Type A

– Off-line vent with supplies from below.

Top View

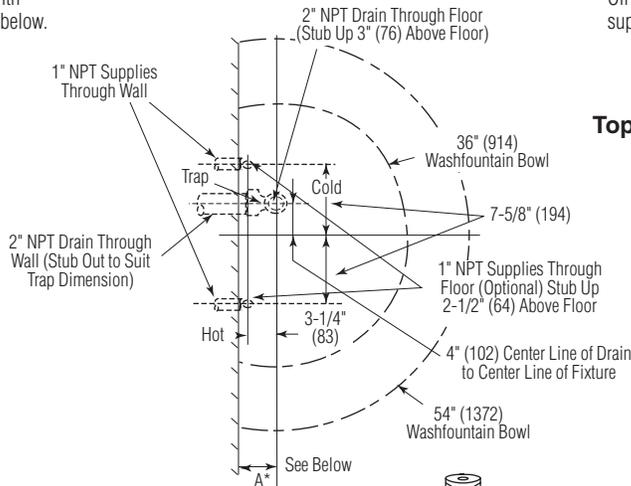


Side View

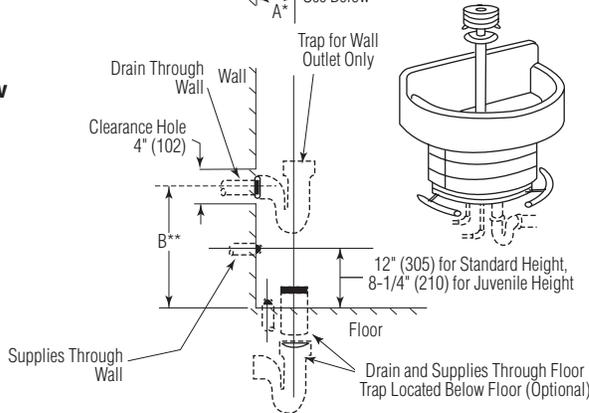


Type O

– Off-line vent with supplies from above.

Top View

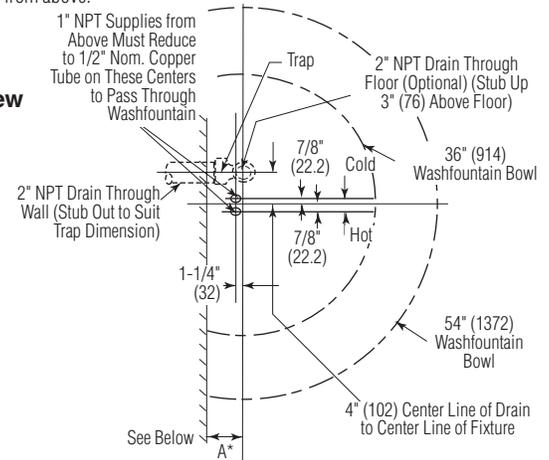

Side View

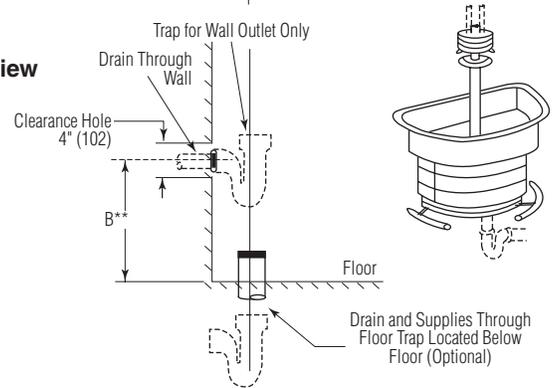

Installing Traps

When installing trap with a coupling and nipple, see dimension D in the chart below. If trap is installed tight to bottom of bowl, dimension D depends on design of trap.

| Bowl Size | A* | B** (Standard Height) | B** (Juvenile Height) |
|------------|--------------|---------------------------|---------------------------|
| 54" (1372) | 5-1/4" (133) | 6 to 13-1/4" (152 to 337) | 6 to 10-1/4" (152 to 260) |
| 36" (914) | 4-3/4" (121) | 6 to 13-1/4" (152 to 337) | 6 to 10-1/4" (152 to 260) |

* Wall to centerline of trap ** Centerline of drain to floor


Rough-Ins – Semi-Circular (continued)

(mm)


Type B

– Centrally rising vent with supplies from above.

Top View

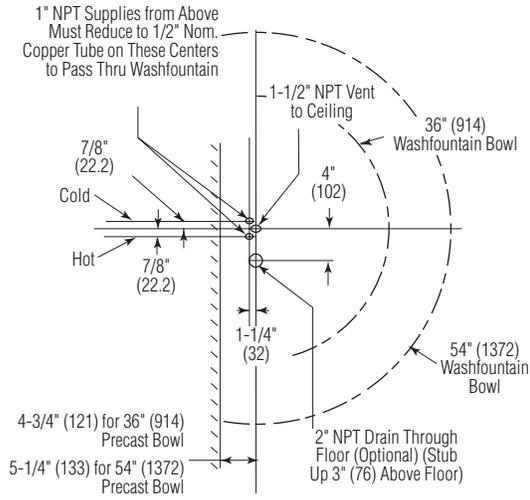


Side View

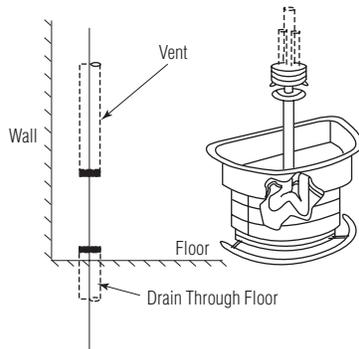


Type H

– Centrally rising vent with supplies from below.

Top View

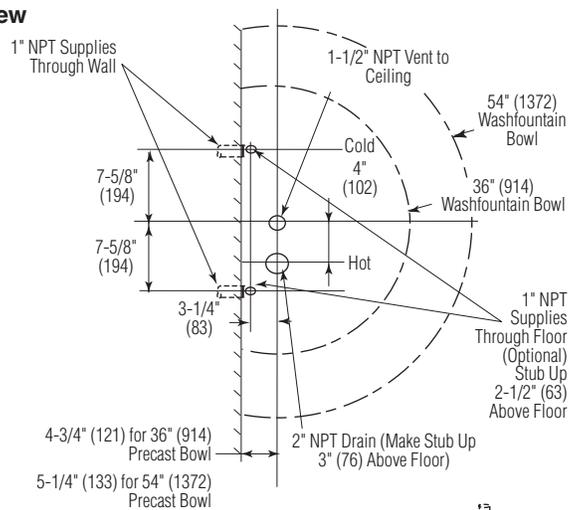

Side View

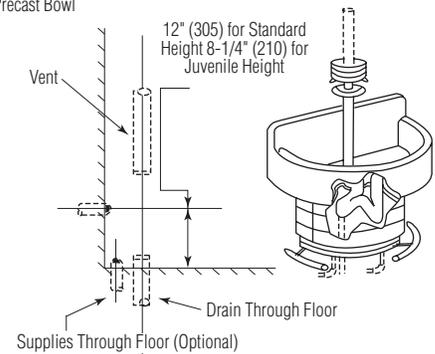


Dimensions – Pedestal Anchoring


| Bowl Size | Standard Height | | | Juvenile Height | | |
|------------|-----------------|--------------|---------------|-----------------|--------------|---------------|
| | A | B | C | A | B | J |
| 54" (1372) | 16-1/2" (419) | 14" (356) | 18-1/4" (464) | 16-1/2" (419) | 14" (356) | 14-1/4" (362) |
| 36" (914) | 11" (279) | 8-5/8" (219) | 18-1/4" (464) | 11" (279) | 8-5/8" (219) | 14-1/4" (362) |

Anchoring Pedestals


1. Place pedestal assembly as shown.
2. Anchor pedestal assembly to floor and wall with suitable wall fasteners.
Backing may be required in some types of wall construction.

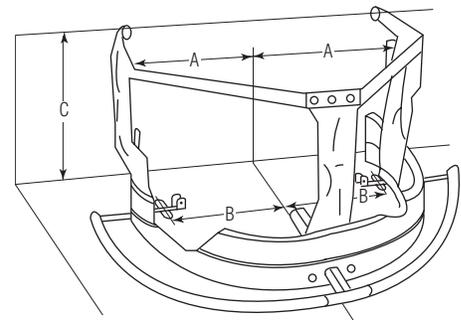

Types A and O

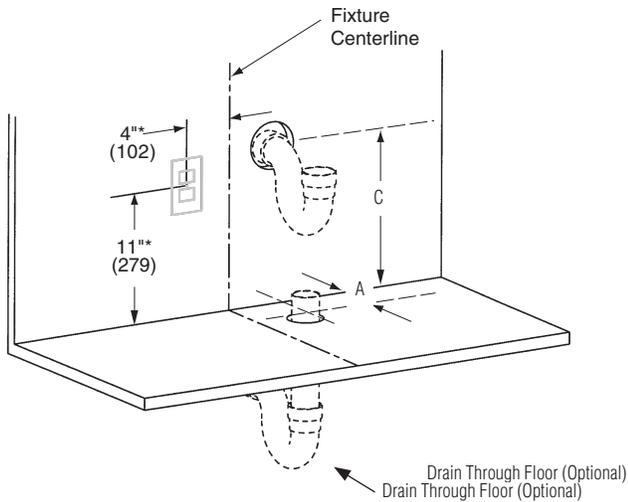

Types B and H

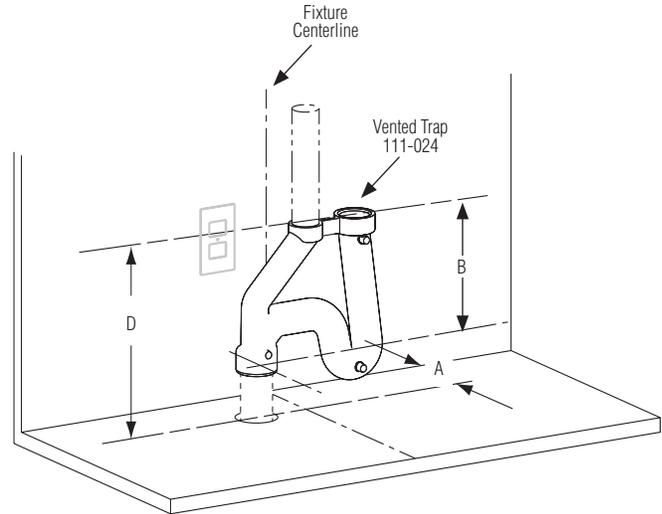

* Suggested location of 110VAC GFCI electrical outlet. Always check local codes before installing. Outlet may be required to be in a remote location.


| Model | Bowl Size | A (All Types) | B (Types B & H) | C (Types A & O) | | D (Types B & H) | |
|-------------------|------------|---------------|-----------------|---------------------------|---------------------------|-----------------|-----------------|
| | | | | Standard Height | Juvenile Height | Standard Height | Juvenile Height |
| WF2704, WF2708 | 54" (1372) | 8-1/4" (210) | 7" (178) | 6 to 13-1/4" (152 to 337) | 6 to 10-1/4" (152 to 260) | 18-5/8" (473) | 14-5/8" (371) |
| WF2703, WF2705 | 36" (914) | 7-3/4" (197) | 7" (178) | 6 to 13-1/4" (152 to 337) | 6 to 10-1/4" (152 to 260) | 18-5/8" (473) | 14-5/8" (371) |

Rough-Ins – Circular

(mm)


Type A

– Off-line vent with supplies from below.

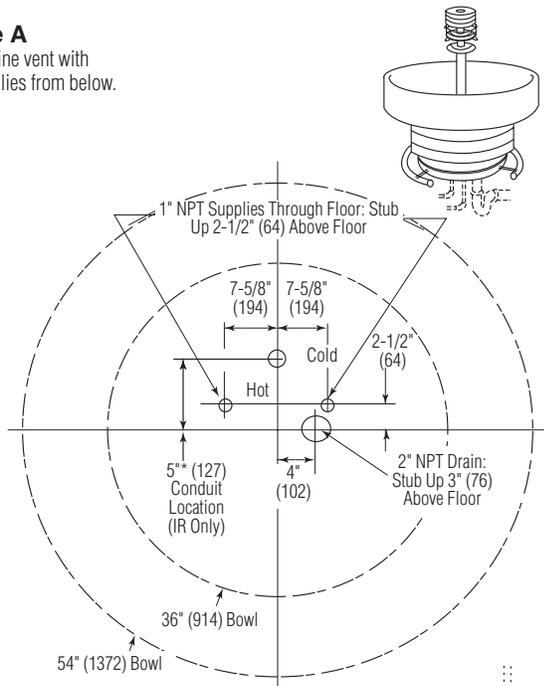


Type B

– Centrally rising vent with supplies from above.

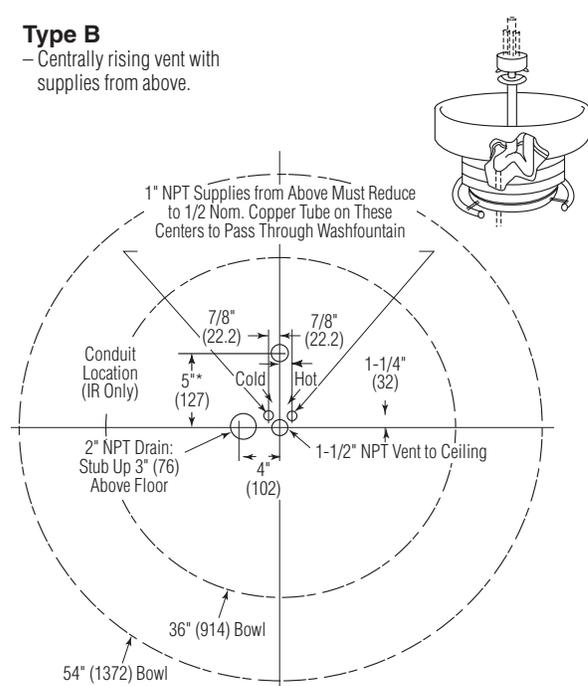


Type H

– Centrally rising vent with supplies from below.

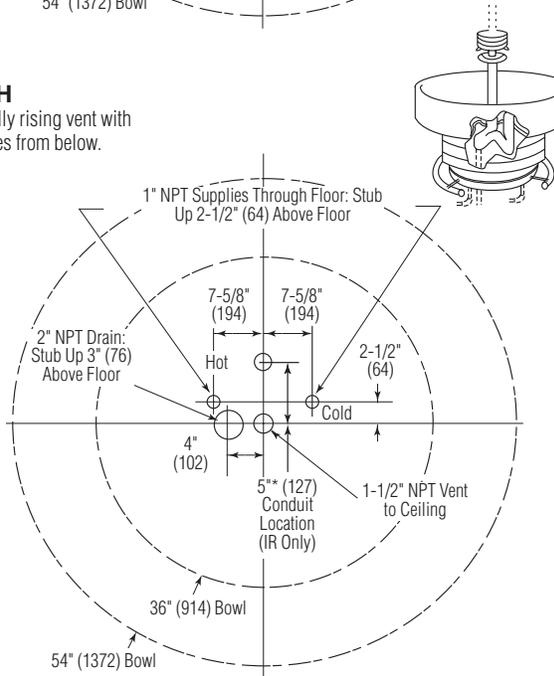

Type O

– Off-line vent with supplies from above.

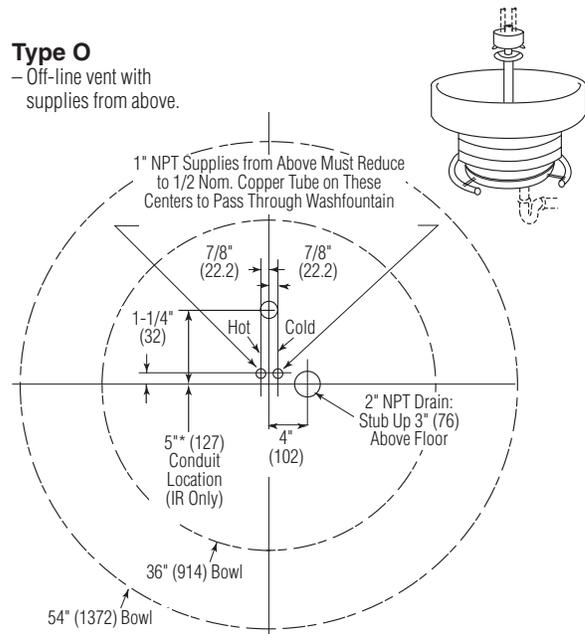

* Remote mounting of transformer with 24 VAC electrical supply to washfountain is recommended. See local electrical codes before roughing in. (This conduit location is only a recommendation.)