



WS-1WCA Individual Coverall Wall Shower

- Quick, Easy Installation
- Completely Preassembled Wall Shower Unit

Specifications

Materials

Shower panel is type 304 stainless steel. All other exposed parts are stainless steel or chrome-plated brass. Valve bodies are brass casting. Supply inlets are flexible stainless steel hoses.

Standard Equipment

Flow Control

A 2.0 GPM (7.6 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.5 GPM (9.5 LPM) Max.

Shower Panel


Constructed of 18 gauge stainless steel with stainless steel soap tray mounted to panel. Shower panel top and bottom covers are sloped, and constructed of 16 gauge stainless steel.

Showerhead

Standard fixed direction adjustable spray showerhead.

Supply Inlets

Supply inlets are flexible, stainless steel hoses with 1/2 NPT connections. Inlets are accessible through the back of the shower or through knockouts in the top and bottom covers.

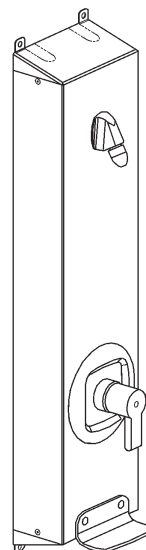

WS-1WCA

Standard Selections (Must select one from each category)

Valve Type (select one)

Hot/Tempered and Cold Supplies

- ☐ **EF** Equa-Flo Pressure Balancing Valve
- ☐ **HD** Equa-Flo HD Pressure Balancing Valve
- ☐ **TMV** Thermostatic Mixing Valve
- ☐ **HC** Hot and Cold Compression Valve*

Single Tempered/Cold Supply

- ☐ **AZ** Infrared Metering Valve* **
- ☐ **PM** Presto 50B Mechanical Metering Valve
- ☐ **AST** Air Metering Valve
- ☐ **SV** Single Compression Valve
- ☐ **TT** TouchTime® Metering Valve**

Optional Selections

Showerhead Variations

- ☐ **SX** Severe Service Showerhead
- ☐ **SF** Deluxe Showerhead with Ball Joint
- ☐ **ES** Economy Soft Flow with Ball Joint

Optional Flow Control (Not available with SF Showerhead)

- ☐ **G** 1.5 GPM Flow Control

Volume Control (Not available with SX or ES Showerhead)

- ☐ **AKV** Allen Key Volume Control
- ☐ **THV** T-Handle Volume Control

Ball Joint (Not available with SX or ES Showerhead)

- ☐ **LBJ** Lockable Ball Joint

Miscellaneous


- ☐ **SHV** Vertical Shroud:
Showerhead Height _____
Floor to Ceiling Height _____
- ☐ **SHH** Horizontal Shroud (Per 3' Section)*
- ☐ **RSD** Recessed Soap Dish
- ☐ **ST** Stops in Supply for Valves (included with EF, HD and TMV valves)
- ☐ **VS** Vandal Resistant Screws

*Non-cancelable, non-returnable

**AZ and TT valves require optional 24V Class 2 transformers, available as a separate item from Bradley. PT (S83-134) 24V Plug In Transformer (1/2 amp) Up to 2 showers. 4RT (S45-2045) 24V Remote Transformer (2amp) Up to 4 showers.



(mm)

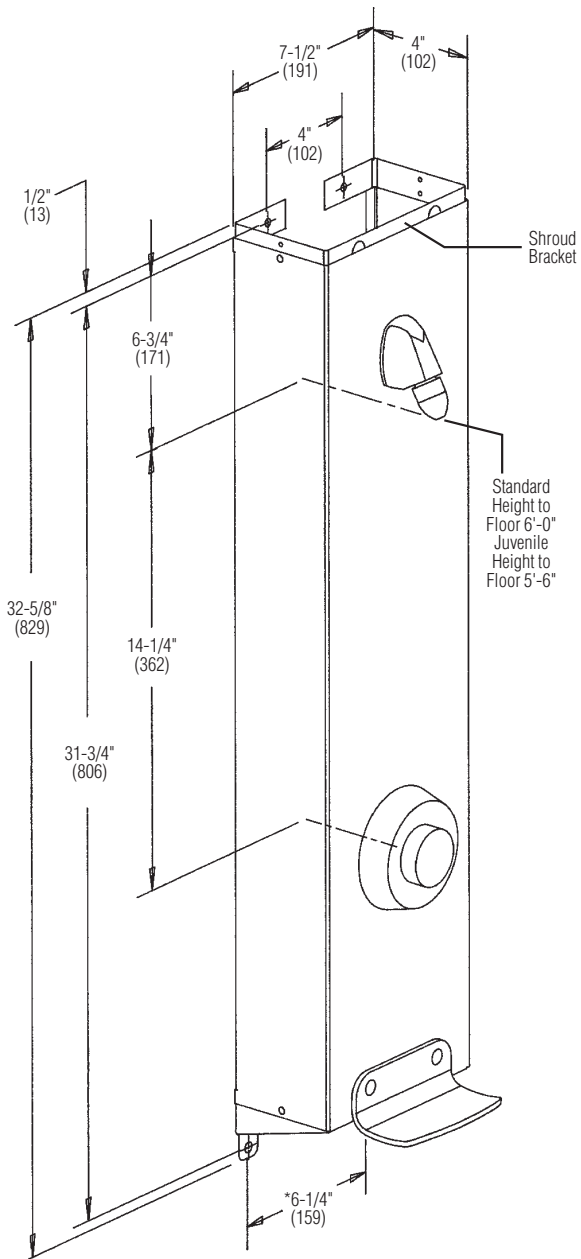

© 2015 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com