




Specific Features: _____



Optional drains sold separately.
Complies with ASME A112.18.2/ CSA B125.2

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BRIZO®
LAVATORY
FAUCETS


- Odin™ Bath Collection
■ Single Hole Sink Applications

- Lavatory faucet for concealed mounting on single hole applications.
- 4 7/16" (113 mm) long, 6 1/2" (165 mm) high rigid spout.
- Maximum flow rate 1.5 gpm @ 60 PSI.
- Integrated supply line hoses, 34" long, connect to 3/8" O.D. compression stop fittings.
- Optional drains available.

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



- ASME A112.18.1 / CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.

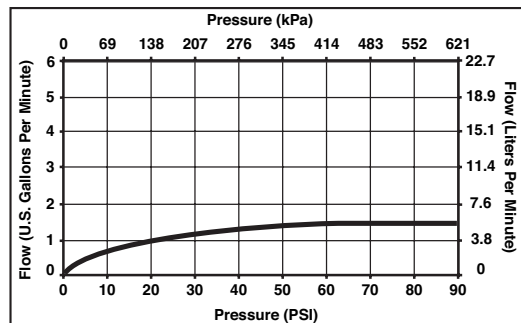

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2014 Masco Corporation of Indiana