

SPECIFICATIONS

ROMAN TUB FAUCET WITH SOFT TOUCH PERSONAL SHOWER™

Description

- 2 handle with solid brass spout
- Soft Touch Personal Shower[™] with integral diverter system*
- Spout plug for pressure testing & plaster guard
- Fits 1 3/8" to 1 1/2" diameter mounting hole

Standards

- ASME A112.18.1
- CSA B125
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities 4.27.4 Controls and Mechanisms ঙু ৷

D309711 (shown) MELROSE™

With widespread rough-in valve: D309711 (w/Personal Shower) D300911 (w/o Personal Shower)

Available Colors & Finish

- Chrome
- Brushed Nickel (BN)

Trim Kits:

ځ


(for use w/ rough-in valves)
D300911T (w/o Personal Shower)

Special Packaging

- This product also available with valve packaged separate from trim.
- Use with rough-in valve: D210000BT (10" CC fixed) OR D215000BT (widespread)
- Valves are combination 1/2" copper sweat, 1/2" NPT threaded connectors for all ports

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

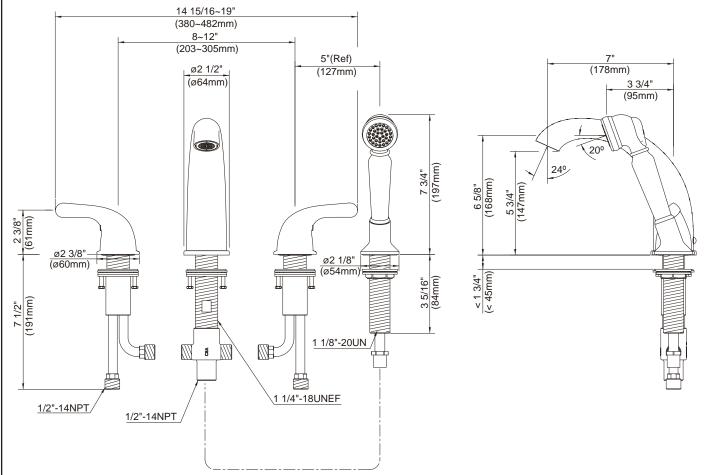

* Danze Soft Touch Personal Shower™ is designed to operate only when the button is pressed; water will flow to the spout whenever pressure is released from the button.

Specific Features:


Submitted Model No.: _



SPECIFICATIONS

ROMAN TUB FAUCET ROUGH-IN VALVES-CRITICAL DIMENSIONS

Rough-in valve D215000BT (widespread)

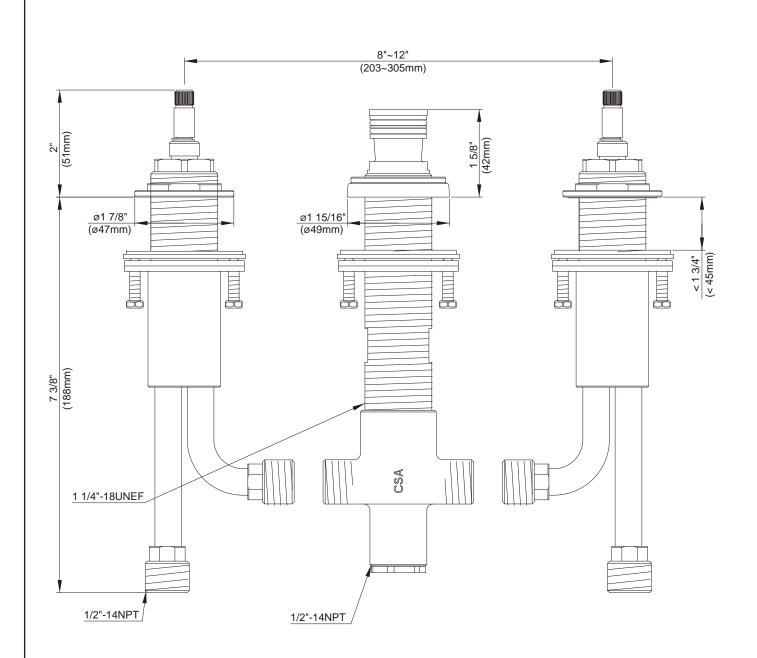

* Installation method shown is for deck thickness of less than 1-3/4". If the installation is for deck thickness between 1-3/4" and 3-1/2", the sleeve nut needs to be reversed.

Specific Features: _____ Submitted Model No.: _____