


Submitted Model No.:

Specific Features:

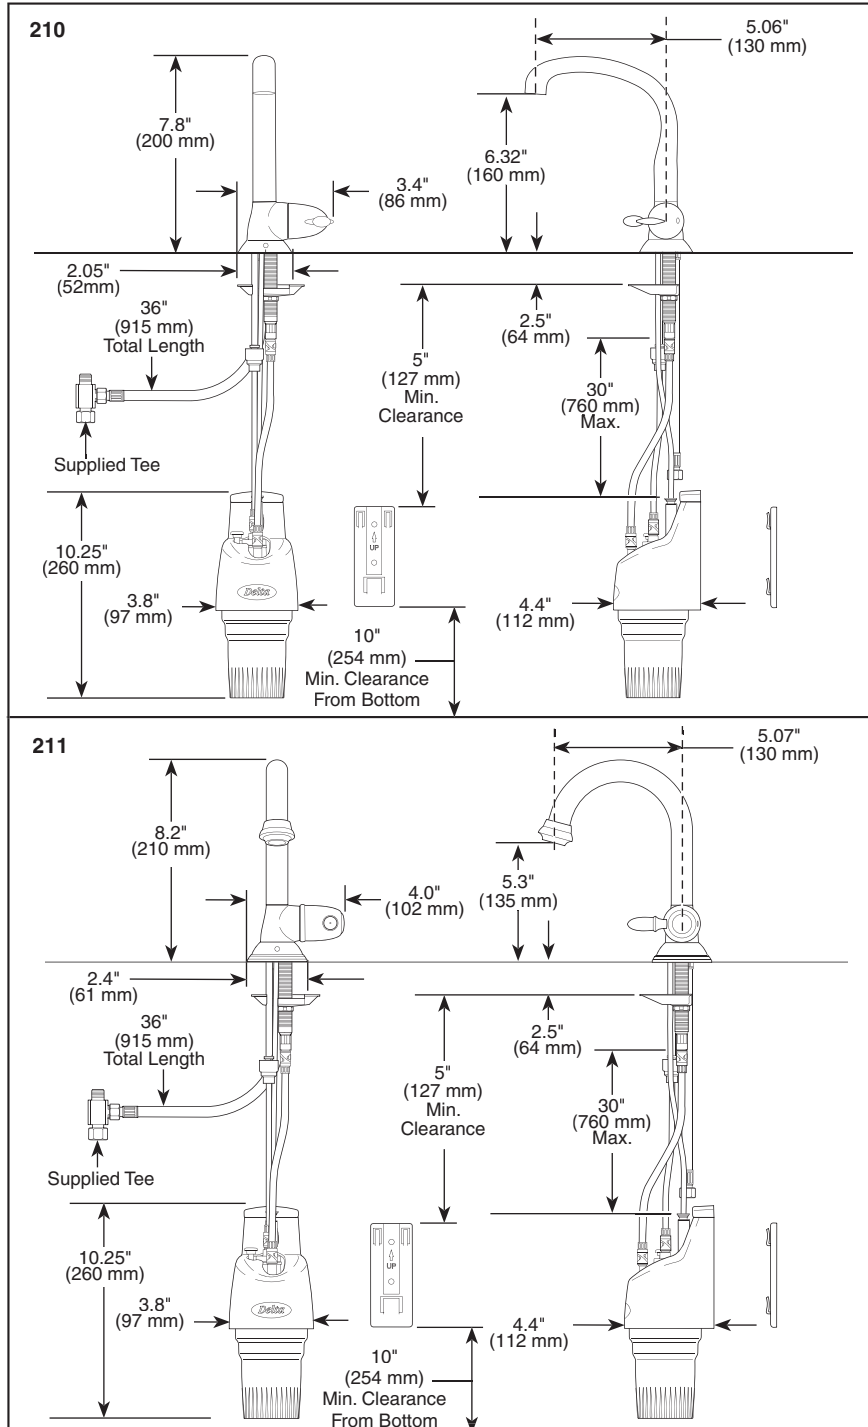

WATER FILTRATION SYSTEM

- Simply PÜR®
- Single Handle Side Faucet
- Single Hole Deck Mount
- Quick Snap® Hose Installation

STANDARD SPECIFICATIONS:


- Solid brass fabricated body.
- 210 - 7.8" (200 mm) high, 5.06" (130 mm) long, swings 180°.
- 211 - 8.2" (210 mm) high, 5.07" (130 mm) long, swings 360°.
- Quick Snap® hose(s) & tube(s) installation.
- Visual indicator using light pipe indicates filter status.
- All fittings supplied - ready to install.
- Standard 3/8" compression tee.
- Easy filter cartridge replacement.
- Operates using 2 AA batteries (supplied) - long life (more than 1 year).
- Under sink filtration system should be mounted within 30" from the faucet.
- Maximum mounting thickness is 2.5" (64 mm).
- Minimum mounting hole size is 1.1" (28 mm).
- Must only be connected to the cold water supply.
- Uses only PÜR® blue faucet mount filters.
- See owners manual for performance data sheet filter contaminant removal data.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- NSF 42 & 53
- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- EPA Establishment Number 081771-IN-001

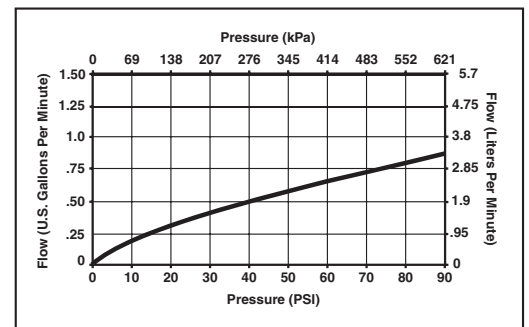

Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2006 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.
 DSP-K-210 Rev. A