


BAR & PREP SINK FAUCETS

- Waterfall® Series
- Two Handle Deck Mount
- Two Hole Sink Applications

Submitted Model No.: _____

Specific Features: _____

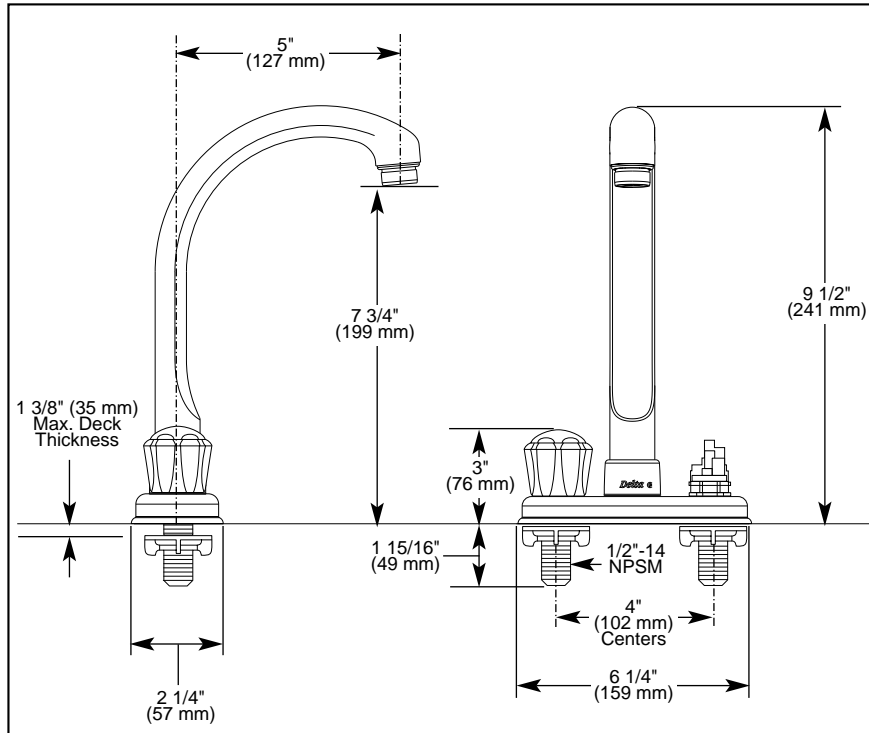

STANDARD SPECIFICATIONS:

- Two handle deck faucets for mounting on two hole sinks.
- Solid fabricated brass body.
- 4" (102 mm) centerset.
- 5" (127 mm) long, 9 1/2" (241 mm) high spout swings 360°.
- LHP - Less Handle Program.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- 1/4 Turn handle stops on LHP models (optional).
- All operating parts shall be replaceable from the top.
- 1/2"-14 NPSM threaded male inlet shanks.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

Available LHP Handle Options ▲ Specify Finish

H21 1 1/8" (29 mm)	H24▲ 3 1/4" (83 mm)	A24▲ 2 5/16" (59 mm)	H25▲ 2 5/16" (59 mm)	H26▲ 1 1/4" (32 mm)
H27▲ 1 1/4" (32 mm)	H28 1 7/16" (37 mm)	H212▲ 3" (76 mm)	H215▲ 2 5/16" (59 mm)	

Available LHP Handle Accent Options

	A24CL
	A24, A24NN, A24PB, A24WH

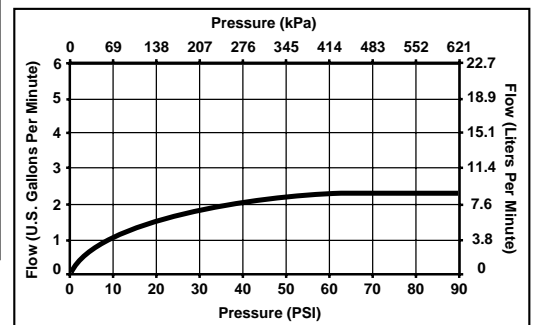

Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2006 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.