


Submitted Model No.:

Specific Features:

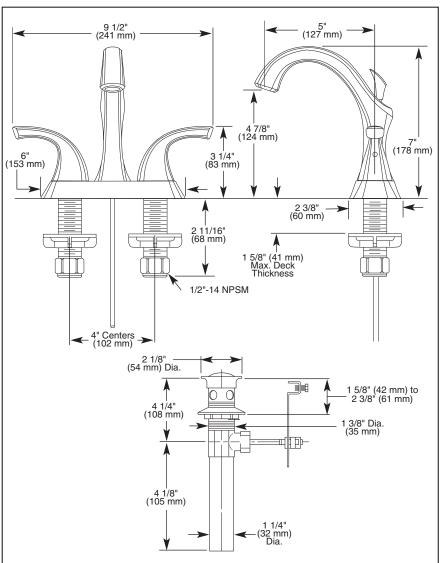

▲ Designate proper finish suffix

 Models have a maximum 1.5 gpm flowrate @ 60 PSI. WARRANTY

 Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.

 Control mechanism is a rotating cylinder type with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless

• 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

ASME A112.18.1 / CSA B125.1
ASME A112.18.2 / CSA B125.2

\Lambda DELT

LAVATORY

■ Addison[™] Bath Collection

STANDARD SPECIFICATIONS:

Hot and cold stems are interchangeable.

• 1/2"-14 NPSM threaded male inlet shanks.

Two Handle Deck Mount 3 Hole Sink Applications

 Solid brass fabricated body. 4" (102 mm) centerset.

5" (127 mm) long, 7" (178 mm)

Metal pop-up drain assembly.


FAUCETS

4" Centerset

high rigid spout. 1/4 turn handle stops.

steel lined sockets.

- LICC/ANSI A117.1 Indicates ADA compliance to
- EPA Water Sense
 "LF" suffix indicates model is verified to
- <0.25% Pb average wetted surface regulation.



FAUCET COMPA

55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2009 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.