

# **Lavatory Faucets**

Single shank mixing faucet less coverplate-CER-TECK® 1/4 turn ceramic structures

Model No: 25C3847

## **COMPLIES WITH:**

- · CSA certified.
- Complies to ASME A112.18.1/CSA B125.1
- Verified compliant with 0.25% weighted average Pb content regulations
- Verified compliant with 0.25% weighted average Pb content regulations
- (Contact Delta Representative for State and/or Local Approvals)
- Balanced Lever handles ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs operating force.









#### NOTES:

Verified compliant with 0.25% weighted average Pb content regulations

This COMPLETE SERIES is available as Compliant product as of Nov. 1, 2009.

The Product Numbers have NOT changed.

#### SPECIFICATION:

- · Two handle sink faucet
- Single shank mixing faucet with coverplate-CER-TECK® 1/4 turn ceramic structures Polished chrome plated finish
- · Metal hold-down package
- Single shank mixing faucet less coverplate-CER-TECK® 1/4 turn ceramic structures
- Anti-rotation, body mounted locking pins
- Spout#: 8 Gooseneck spout-4.5" radius -Standard rigid/swivel field installation-Vandal resistant .090" wall thickness(R2)
- Outlet#: 4 Standard 1.5 GPM (5.7 L/Min) Flow Control Aerator
- Handle#: 7 63.5 mm (2.5") Balanced Lever Handles ADA compliant -Metal - Color Indexed - Vandal Resistant screws


### **OPERATION:**

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced June 02, 2014.



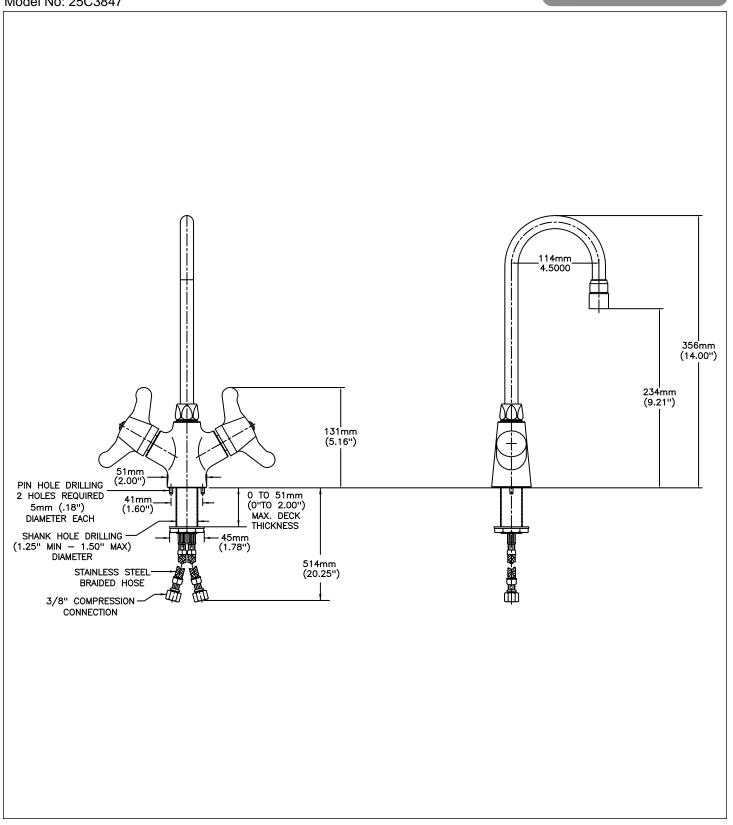

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced June 02, 2014.