



Submitted Model No.:

Specific Features:

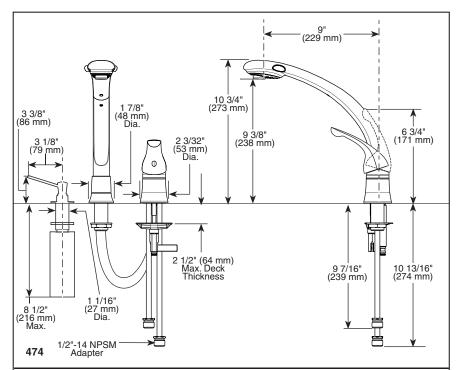

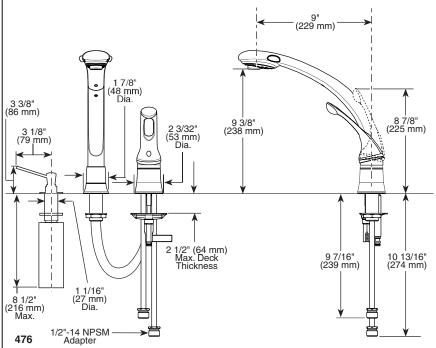

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselectonline.com for finish options and product availability.

DSP-K-474 Rev. E

ODELTA.

KITCHEN FAUCETS

- Waterfall[®] Pull-Out Series
- Single Handle Widespread Deck Mount
- 3 Hole Sink Applications
- Quick Snap® Hose Installation

STANDARD SPECIFICATIONS:

- Solid fabricated brass body.
- 10 3/4" (273 mm) high, 9" (229 mm) long [includes 6 1/4" (159 mm) long pull-out spray] nestled in all brass hub assembly, swings 360°.
- Spout is connected to valve body with a 60" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Pull-out spout operates in an aerated or spray mode via an easy side-to-side push lever.
- Lever or loop handle shall return to neutral position when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Quick Snap[®] hose installation.
- Touch-Clean[®] sprayhead.
- 3/8" O.D. straight, staggered copper supply tubes 9 7/16" (240 mm) and 10 13/16" (275 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Soap/lotion dispenser.
- 2 1/2" (64 mm) thick deck installation capability.
- Integral double check valves in spout.
- Recommended hole size 1 3/8" (35mm) on 4" (102mm) centers.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

 Lindicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified





