

Submitted Model No.: _____

Specific Features: _____



RAINCAN SHOWERHEAD

■ Raincan Showerhead

STANDARD SPECIFICATIONS

- One to five spray showerhead.
- 5"-8 1/2" spray face diameter.
- Brass construction: 52682, 52689.
- Touch-clean spray holes: 52680, 57740, 52683
- 2.5 GPM Maximum at 80 psi (9.5L/min @ 552 kPa)


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1

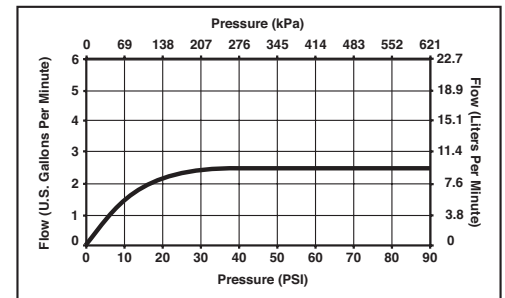

<p>52680▲ Showerhead</p>	<p>8 5/32" (207 mm)</p> <p>4 11/16" (119 mm)</p>
<p>52682▲ Showerhead</p>	<p>8 3/4" (222 mm)</p> <p>3 5/16" (84 mm)</p>
<p>52683▲ Showerhead</p>	<p>5" (127 mm)</p> <p>3 11/32" (85 mm)</p>
<p>52689▲ Showerhead</p>	<p>6 5/16" (160 mm)</p> <p>3 1/2" (89 mm)</p>
<p>57740▲ Showerhead</p>	<p>7 11/16" (195 mm)</p> <p>2 9/16" (65 mm)</p>

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-52680 Rev. B



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2012 Masco Corporation of Indiana