

# DELTA<sup>®</sup>

## SPECIALTY FAUCETS

- Single Handle
- Two or Three Hole Sink Applications
- 4" (102 mm) Centerset
- 4 3/4" (121 mm) Long Pull-Out Spout

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_



**LISTED**  
UL Listed to US and Canadian  
Safety Standards  
21E




### COMPLIES WITH:


- ASME A112.18.1-2000
- CSA B125-98
- Indicates ADA compliance to ICC/ANSI A117.1-1998
- IAPMO Listed
- CSA Certified

### STANDARD SPECIFICATIONS:


- Single handle utility faucet for exposed mounting on two and three hole sinks.
- 4" (102 mm) centerset.
- Solid fabricated brass body.
- 4 3/4" (121 mm) long pull-out spout.
- Hose extends 45" (1143 mm).
- 3/8" O.D. copper tube inlets with 1/2"-14 NPSM adapters.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Lever handle shall return to neutral position when valve is turned off.
- All operating parts shall be replaceable from the top.
- Each supply line has a back siphonage check valve. Spout contains a backflow check valve. Valve has an anti-siphon atmospheric vent in the stainless steel ball.

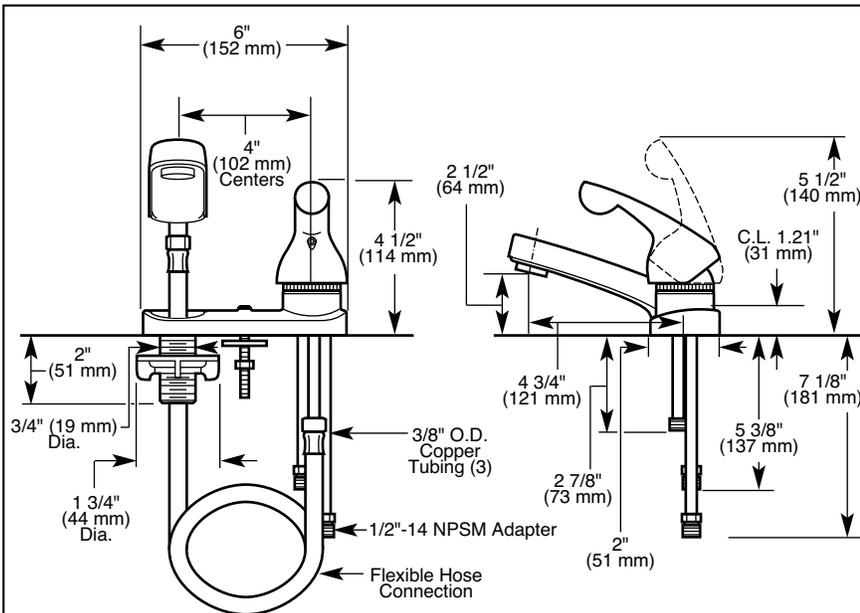

750

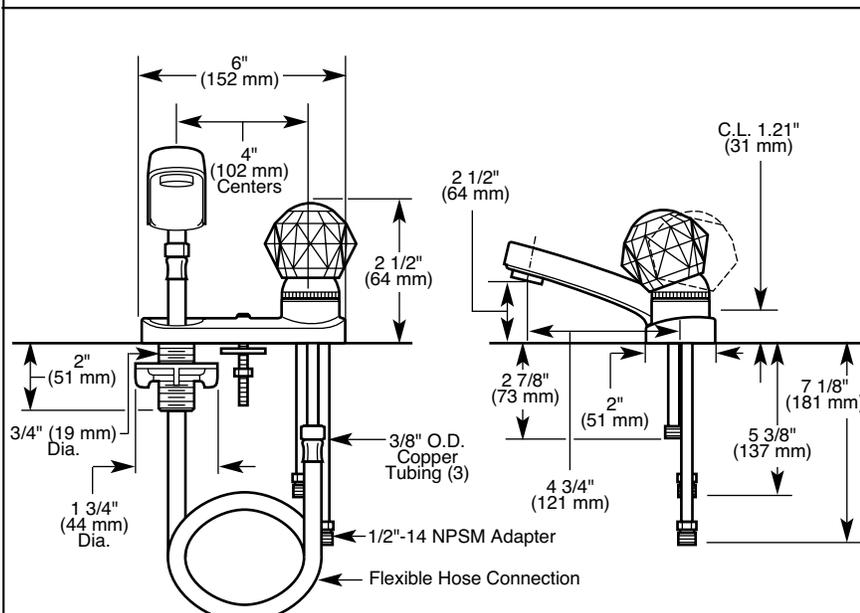

752

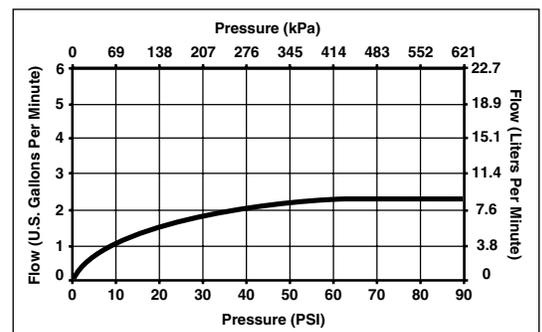

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

Standard Features	750	752
	Washerless	◆
Two or Three Hole Installation	◆	◆
4" (102 mm) Centerset	◆	◆
4 3/4" (121 mm) Long Pull-Out Spout	◆	◆
Clear Knob Handle		◆
Lever Handle	♿	
60" (1524 mm) Long Hose Extends 45" (1143 mm)	◆	◆
3/8" O.D. Copper Supply Inlet Tubes with 1/2"-14 NPSM Adapters	◆	◆
Chrome Finish	◆	◆



Indianapolis, Indiana 46280  
 A Division of Masco Corporation of Indiana  
 © 2001 Masco Corporation of Indiana