


B2412LF

Submitted Model No.: \_\_\_\_\_  
 Specific Features: \_\_\_\_\_

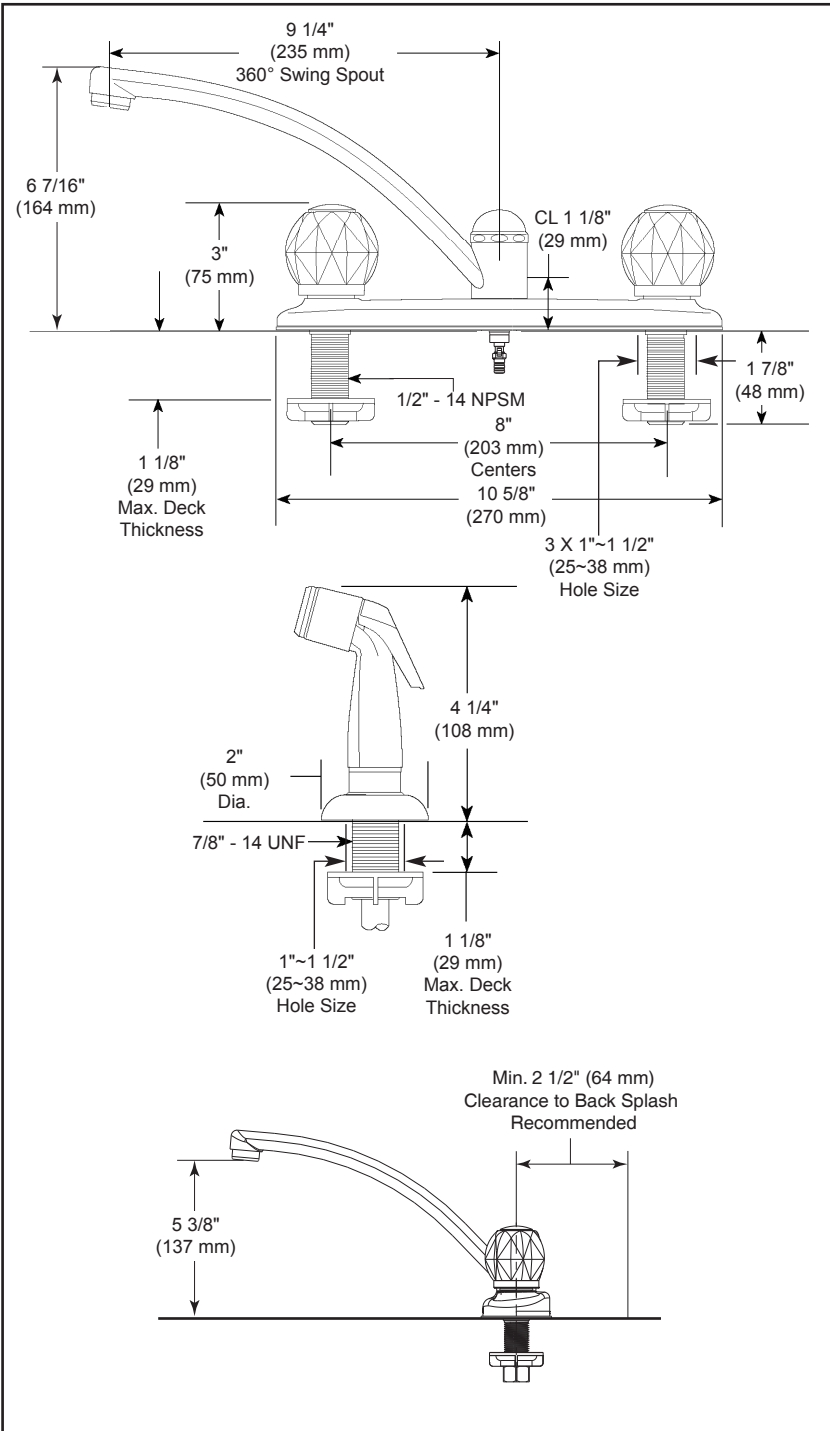

## KITCHEN FAUCETS

- Two Handle Deck Mount
- 4 Hole Sink Applications

### STANDARD SPECIFICATIONS

- 8" (203 mm) centers.
- 9 1/4" (235 mm) long, 6 7/16" (164 mm) high spout swings 360°.
- Hot and cold stems are interchangeable.
- Knob handle control mechanism is a rotating cylinder type with stainless steel plate and 90° rotating, with replaceable non-metallic seats.
- 1/2" -14 NPSM threaded male inlet shanks.
- Models with spray attachment have antisiphon device as integral part of valve body.

### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the Original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all Industrial, Commercial and Business applications.



### COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- CSA Certified

Verified compliant with 0.25% weighted average Pb content regulations.

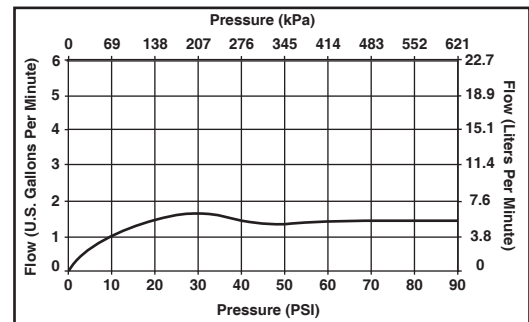

55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, ON N5P 4L1  
 © 2011 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.