



Model No: T17TH135

## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- Thermostatic Valve ASSE 1016
- Volume Control lever handle ADA compliant to ICC/ANSI A117.1/ADA
- (Contact Delta Representative for State and/or Local Approvals)





## **Tub and Shower**

TRIM ONLY MultiChoice™ Universal Thermostatic shower valve - requires separate order of R10000-UNWS Rough-in

## SPECIFICATION:


- TempAssure® 17T Thermostatic cartridge
- Polished chrome plated finish
- · Non-removeable red/blue temperature markings
- Separate ROUGH-IN R1000-UNWS required
- Lever volume control; temperature adjustment dial
- Handle#: 5 Metal Lever Volume Control Handle w/Temperature Adjustment
- #3 Shower Touch Clean™ Showerhead, Arm and Flange
- #3 Shower Flow Rate MAX: 2.0 GPM @ 80 PSI (7.6 L/min @ 552 kPa)
- #3 Shower Flow Rate MIN: 1.8 GPM @ 45 PSI (6.8 L/min @ 310 kPa)

## **OPERATION:**

Not Available

(Dimensional drawing on following page)



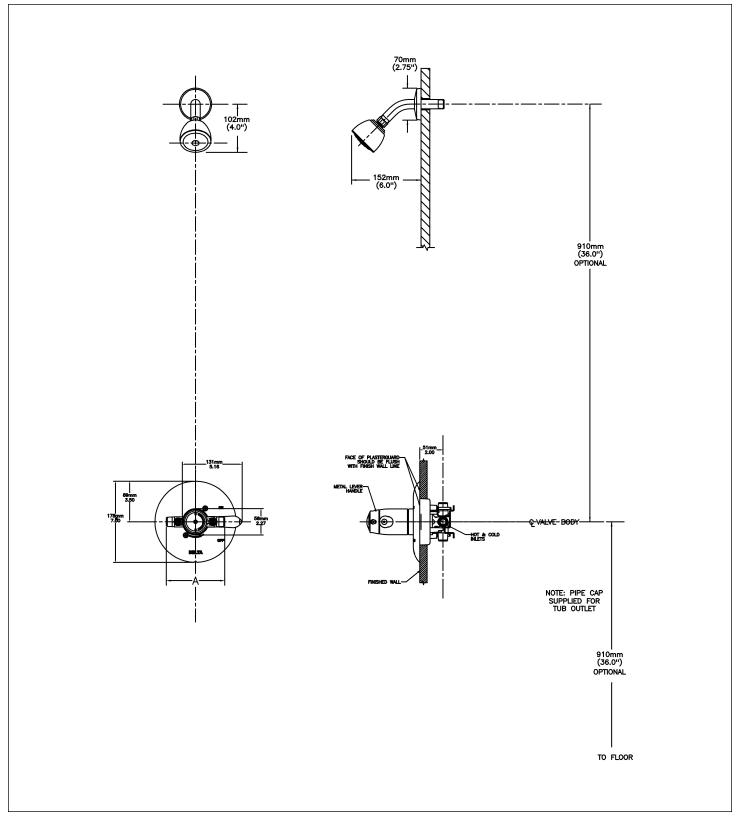

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 03, 2013.