


# ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Classic Series
- Two Handle Roman Tub Faucet
- Three Hole Installation
- Complete Trim and Rough-In

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

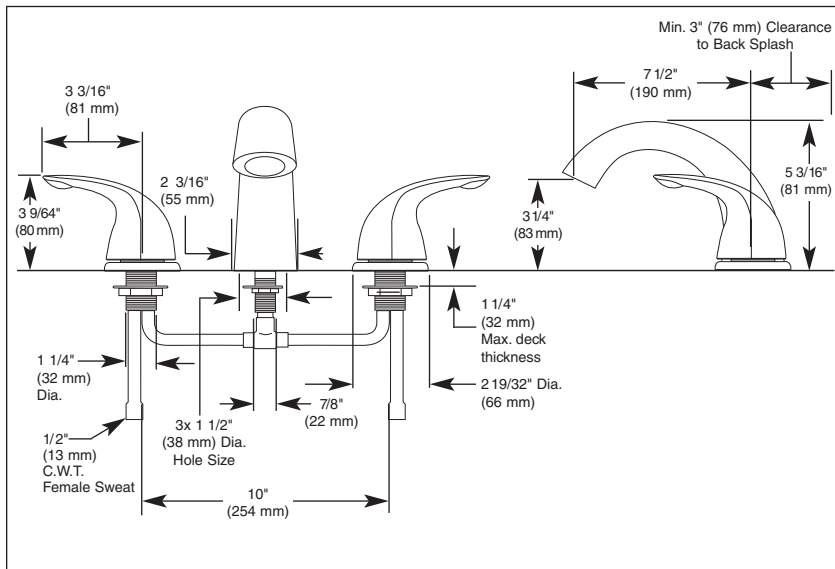

▲ Designate proper finish suffix

## STANDARD SPECIFICATIONS:

- Solid fabricated brass end valves and spout body.
- Fixed 10" (254 mm) widespread mount on deck or ledge.
- 7 1/2" (191 mm) long, 5 3/16" (132 mm) high slip-on rigid spout.
- Conventional rough-in adjusts to 1 1/4" (32 mm) maximum deck thickness.
- 5/8" I.D. copper inlet supply tubes.
- Two-handle Roman Tub faucet for concealed mounting.
- Includes lever handles.
- Control mechanism is a rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaced from the top.

## WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.




## COMPLIES WITH:

- ASME A1 12.18.1 / CSA B125.1



Indicates compliance to ICC/ANSI A117.1

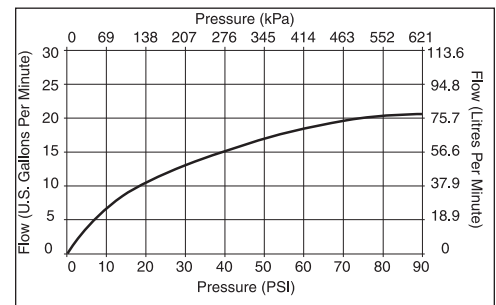

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-B-T2705 Rev. A



55 E. 111th Street, Indianapolis, Indiana 46280  
395 Matheson Blvd. E., Mississauga, ON L4Z 2H2  
© 2009 Masco Corporation of Indiana