





BATH VALVES


- Two Handle Roman Tub Faucet
- Trim Only
- Rough-In Kit Must Also be Ordered to Complete Installation
- Three Hole Installation
- 8 9/16" (217 mm) Long Rigid Slip-On Spout
- Temperature and Volume Controlled with Handles

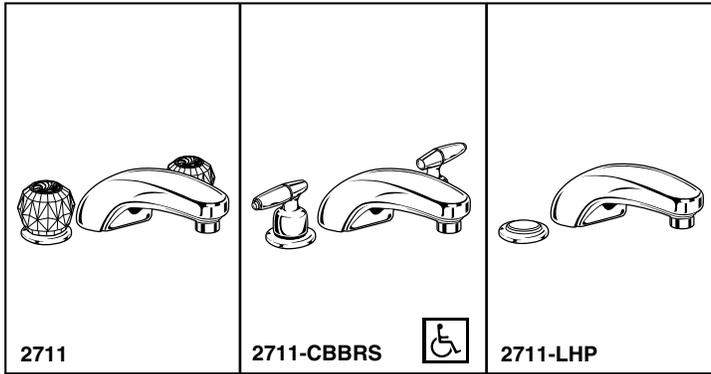

Submitted Model No.: _____
 Specific Features: _____

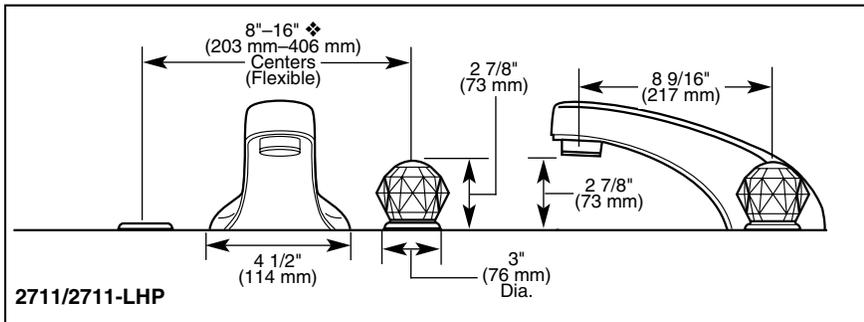

2711/2711-LHP

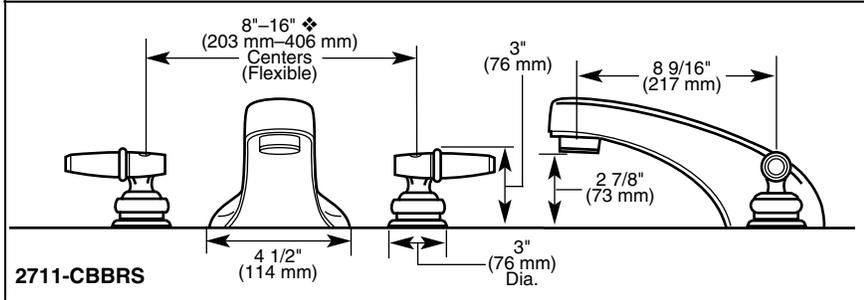

2711-CBBRS

❖ For Lever Handles Use 10"-16" Centers.



COMPLETE VALVE COMPLIES WITH:


- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to CABO/ANSI A117.1

TRIM STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting.
- Clear knob handles with red/blue indicators, brass lever handles or LHP—Less Handle Program. See available handle options on back.
- 8 9/16" (217 mm) long slip-on rigid spout.
- Temperature and volume controlled with handles. NOTE: Rough-In kit must also be ordered to complete installation. Refer to rough-in kits and installation aids on back to determine the best kit for your situation. There are separate specification sheets on each rough-in kit if more details are required.

ROUGH-IN KIT STANDARD SPECIFICATIONS:

- Washerless.
- Three hole installation.
- 5/8" O.D. copper supply inlet/outlet tubes. RP18227 and RP18235 outlet tubes are corrugated copper.
- RP18227 and RP18235—Flexible widespread mount.
- RP23601—10" (254 mm) fixed centers.
- Deck or ledge mount installation.
- Solid fabricated brass end valves and spout body.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.

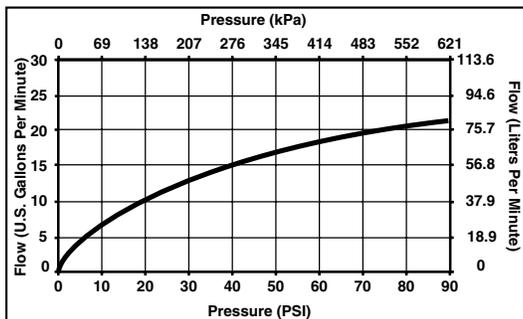


Standard Features—Trim	2711	2711-ABLHP	2711-CBBRS	2711-CBLHP	2711-LHP	2711-PB	2711-PBLHP	2711-WHLHP
8 9/16" (217 mm) Long Rigid Slip-On Spout	◆	◆	◆	◆	◆	◆	◆	◆
Stream Straightener	◆	◆	◆	◆	◆	◆	◆	◆
Clear Knob Handles With Red/Blue Indicators (H61/H61PB)	◆					◆		
Brass Lever Handles (H62/A62PB)			◆					
Less Handle Program—See Handle Kit Options*		◆		◆	◆		◆	◆
3" (76 mm) Diameter Handle Bases	◆	◆	◆	◆	◆	◆	◆	◆
Antique Brass Finish		◆						
Chrome Finish	◆				◆			
Chrome and <i>Brilliance</i> ® Polished Brass Finish			◆	◆				
<i>Brilliance</i> ® Polished Brass Finish						◆	◆	
White Finish								◆

Available Options for Field Conversion:

- NOTE: Standard handle base is 3" (76 mm) diameter.
- Optional 2 1/2" (64 mm) diameter base with gasket. Cannot be used with RP18235 thick deck rough-in. Order RP18300▲.
- Optional 2 5/8" (67 mm) diameter decorative base with gasket. Order RP23094▲.
- Roman Tub hand showers, bath waste assemblies and bath accessories are available separately.


▲ Designate proper finish suffix.

Rough-In Kits and Installation Aids:




RP18227

- Conventional rough-in—adjusts to 1 1/4" (32 mm) maximum deck thickness. Order RP18227.
- Thick tile mounting aid—adds 1" (25 mm) to RP18227 only. Order RP18504 or RP11099 (bulk).
- Thick deck installation aid for RP18227 only. Rigid plastic template installs on deck prior to mud/tile. Order RP27972 or RP28009 (bulk).
- End valve adjustment wrench (for RP18227 and RP18235 rough-in kits). Order RP16867.
- The Helpful Hand for 4" (102 mm) to 16" (406 mm) centers—aligns widespread handles. Order RP22132.



RP23601

- 10" (254 mm) fixed conventional rough-in adjusts to 1 1/4" (32 mm) maximum deck thickness. Order RP23601.



RP18235

- Thick tile rough-in—mounts to deck prior to mud and tile—adjusts to 3 1/4" (83 mm) maximum deck thickness. **Requires RP16867 wrench to adjust.** Order RP18235.
- End valve adjustment wrench (for RP18227 and RP18235 rough-in kits). Order RP16867.
- The Helpful Hand for 4" (102 mm) to 16" (406 mm) centers—aligns widespread handles. Order RP22132.

***Available LHP Handle Options**
◆ For Lever Handles Use 10"-16" Centers.

<p>H61</p> <p>1 1/2" (38 mm)</p>	<p>H62</p> <p>2 5/8" (67 mm)</p>	<p>H63</p> <p>1 1/8" (29 mm)</p>	<p>H64</p> <p>3 1/4" (83 mm)</p>
<p>H65</p> <p>2 1/2" (64 mm)</p>	<p>H66</p> <p>1 7/8" (48 mm)</p>	<p>H67</p> <p>1 3/8" (35 mm)</p>	

***Available LHP Handle Accent Options**

<p>A62CL</p>	<p>A63ST</p>
<p>A62, A62AB, A62AL, A62PB, A62PR, A62WH</p>	<p>A64CL</p>
<p>A62OK</p>	
<p>A63, A63PB, A63WH</p>	<p>A64, A64AL, A64PB, A64WH</p>



Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2003 Masco Corporation of Indiana