


Submitted Model No.:

Specific Features:



▲ Designate Proper Finish Suffix

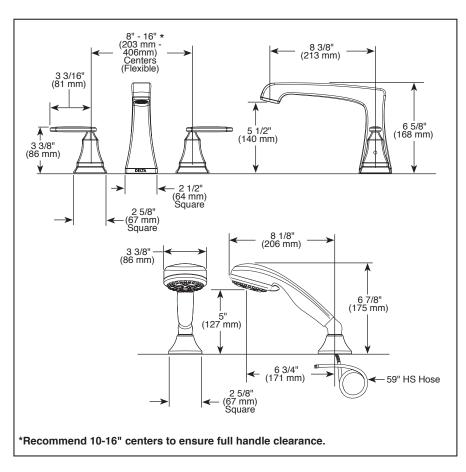

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Ashlyn[™] Collection
- Three Hole Installation (T2764 Series)
- Four Hole Installation (T4764 Series)

STANDARD SPECIFICATIONS:

- Handshower flow rate 2.0 gpm @ 80 PSI
- Trim only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation -R4707 for four hole
 - -R2700 or R2707 for three hole
 - -RP23601 for three hole 10" fixed installation
- There are separate specification sheets on each rough-in kit if more details are required
- Handshower includes double check valves for backflow prevention (T4764)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLETE VALVE COMPLIES WITH:

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1

