




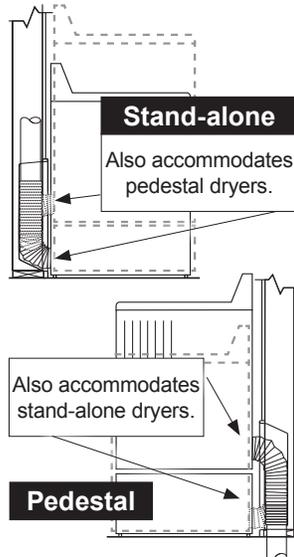


Technical Product Specifications



480 - Up, Down / Pedestal, Stand-alone

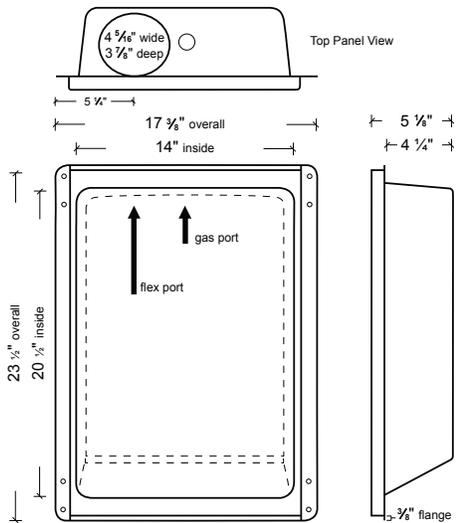

425 / 350 - Upward Venting

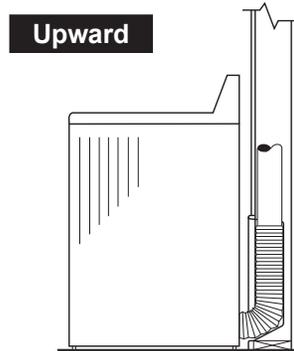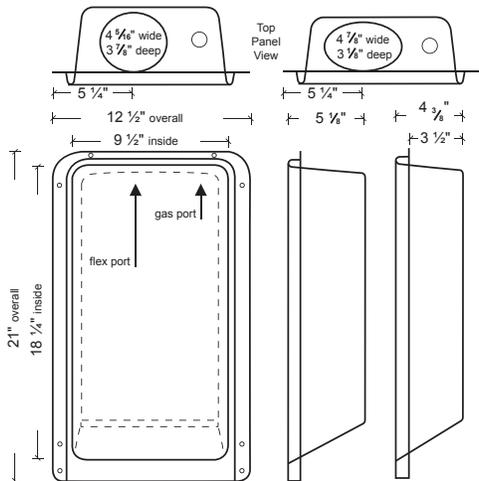

4D / 3D - Downward Venting

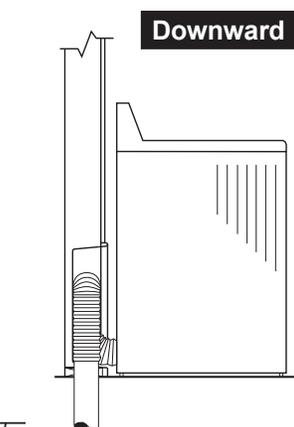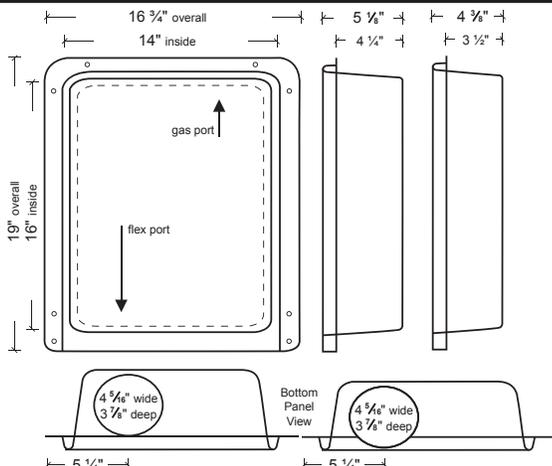

Model Number	Wall Size	Exhaust Direction
480	2X6	Up & Down
425	2X6	Upward
350	2X4	Upward
4D	2X6	Downward
3D	2X4	Downward

Performance Data

For Use:

- Dryer vent hose receptacle
- Doubles as gas connection receptacle
- Meets code requirements as a clean-out

Materials:

- Model 480, 425 and 350 deep drawn with .028 aluminized steel (22 gauge)
- Model 4D and 3D deep drawn with .031 aluminized steel (21 gauge)
- UL Classified for a one hour wall (480 pending)



Cabinets
For Use in Penetration Firestop Systems
See UL Directory of Products Certified for Canada and UL Fire Resistance Directory <25XC>

US Patents 5,476,183, 6,419,102 and 7,731,045

General Information

Benefits:

- Locate the dryer right up against the wall
- Flex is protected from getting crushed
- Lint build-up is minimized
- Efficiency is increased...clothes dry faster
- Dryer related service calls are almost eliminated
- Laundry room appears larger to prospects
- Reduces the fire hazard
- Reduces mold potential in the wall

Features:

- No trim-ring piece is needed
- Elbow eliminator...gain 5 foot of duct run
- Surface is paintable, no masking needed
- Applauded by Mechanical Inspectors
- Over 2 MILLION Dryerboxes installed
- Convenient Duct Support Tab

Manufactured By

In-O-Vate Technologies, Inc.
810 Saturn Street, Suite 21
Jupiter, FL 33477
Phone: (888) 443-7937
Fax: (561) 745-9723
www.dryerbox.com