

DAYTON SPECIFICATIONS

Dayton® Double Bowl Sink Models D, DJ, DD and DDJ Series

GENERAL

Sink is formed of #22 gauge, type 301 series, nickel-bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depth: See next page

Coved Corners: D22519: 2-1/4" (57mm) vertical and horizontal radius
D23317, D23319: 2-1/2" (64mm) vertical and 2-3/4" (70mm) horizontal radius

D23321, D(J)23322, DD(J)23322: 4" (102mm) vertical and 3-1/4" (83mm) horizontal radius

Rim Height: 3/16" (5mm)

Faucet Deck: Raised (except D22519, D23317 and D23319 series).

Finish: Exposed surfaces are polished to a satin finish.

Underside: Undercoated on bottom of bowls

OTHER

Drain Opening: 3-1/2" (89mm)

Note: Unless otherwise specified, sink is furnished with 3 or 4 faucet holes as shown.

Installation Hardware: Included for 3/4" (19mm) countertop.

OPTIONAL ACCESSORIES

Bottom Grid: GBG1414SS (D23317 & D23319), GBG1415SS (D23321 & D23322)

Drain: LK35, D1125


Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.




**SINKS ARE
MADE IN THE USA**

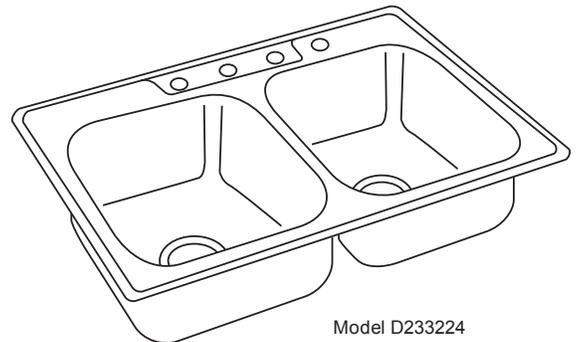

Model D233224

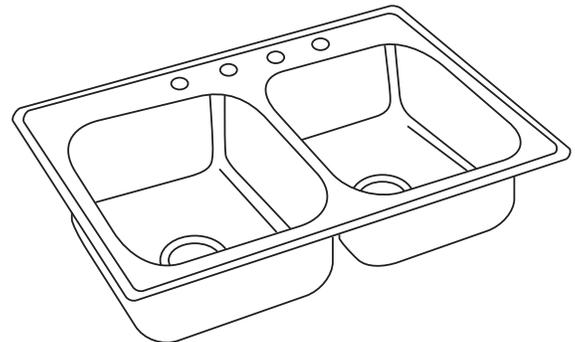

Model D233194

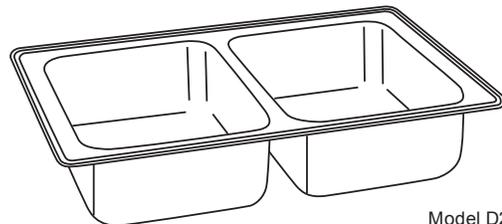


Model D23317

SINK DIMENSIONS (INCHES)*


U-Channel Model Number	J-Channel Model Number	Overall		Inside Each Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Corners)		No. of 1-1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	Minimum Cabinet Size
		L	W	L	W	D	L	W		
		A	B	C	D	E	L	W		
D22519	-	25 (635mm)	19 (483mm)	10 (254mm)	14 (356mm)	6-1/4 (159mm)	24-3/8 (619mm)	18-3/8 (467mm)	1, 3, or 4	30 (762mm)
D23317	-	33 (838mm)	17 (432mm)	14 (356mm)	14 (356mm)	6 (152mm)	32-3/8 (822mm)	16-3/8 (416mm)	None	36 (914mm)
D23319	-	33 (838mm)	19 (483mm)	14 (356mm)	14 (356mm)	6-7/16 (164mm)	32-3/8 (822mm)	18-3/8 (467mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
D23321	-	33 (838mm)	21-1/4 (540mm)	14 (356mm)	15-3/4 (400mm)	6-1/2 (165mm)	32-3/8 (822mm)	20-5/8 (524mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
D23322	DJ23322	33 (838mm)	22 (559mm)	14 (356mm)	15-3/4 (400mm)	6-9/16 (167mm)	32-3/8 (822mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
DD23322	DDJ23322	33 (838mm)	22 (559mm)	14 (356mm)	15-3/4 (400mm)	7-1/16 (181mm)	32-3/8 (822mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)

*Length is left to right. Width is front to back.

U-Channel Type Mounting System



J-Channel Type Mounting System



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


Elkay

elkayusa.com


2222 Camden Court
Oak Brook, IL 60523

Printed in U.S.A.
©2011 Elkay

(Rev. 6/11) 2-14H

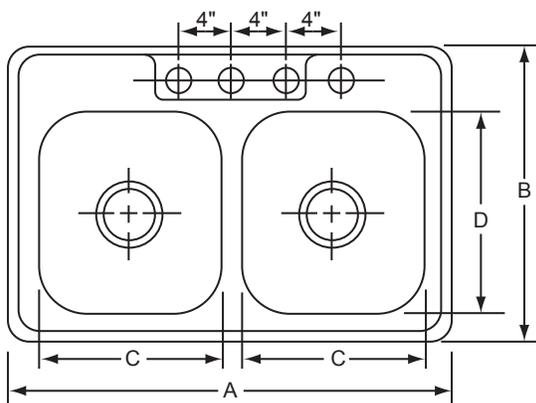


Bowl Depth is E
 Model D233224 Illustrated

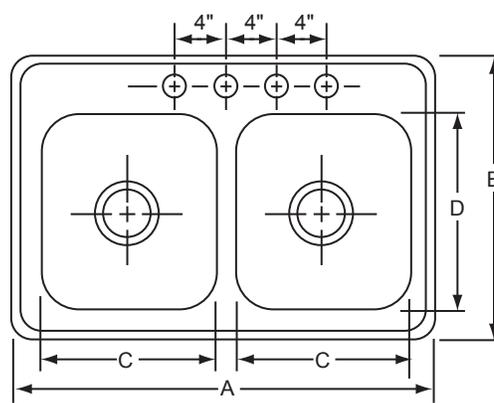

Bowl Depth is E
 Model D233194 Illustrated



Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

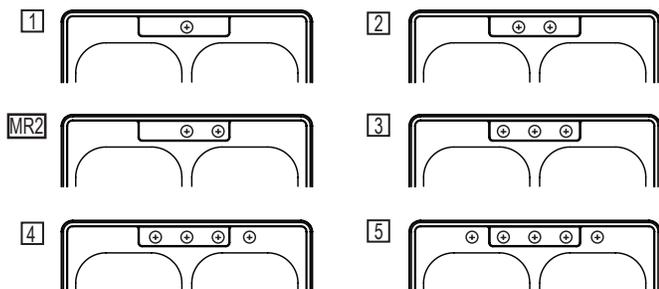


Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

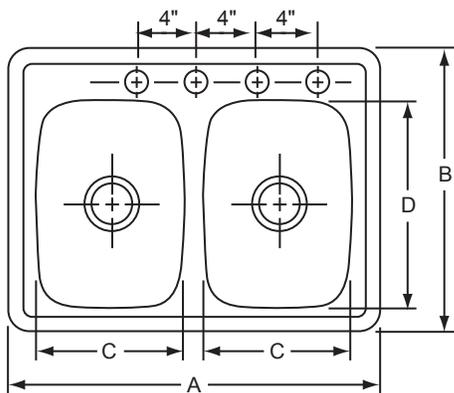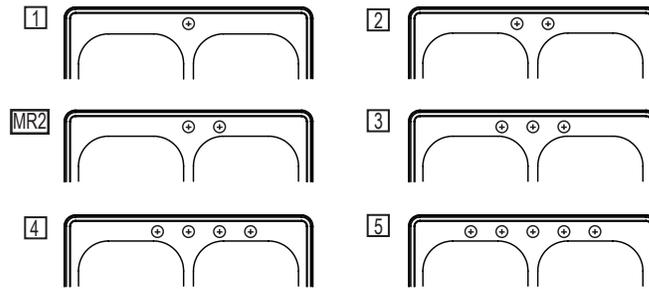

Bowl Depth is E
 Model D225194 Illustrated

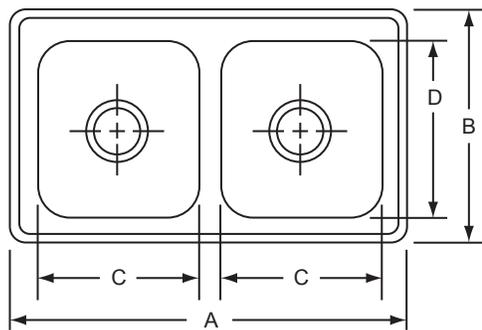

Bowl Depth is E
 Model D23317 Illustrated

Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

