

GENERAL

Sink is formed of #20 gauge, type 301 series, nickel-bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depth: 7" (178mm).

Coved Corners: 3" (76mm) vertical and 2-3/4" (70mm) horizontal radius.

Rim Height: 3/16 " (5mm).

Finish: Exposed surfaces are polished to an Elite Satin finish.

Underside: Fully undercoated.

OTHER

Drain Opening: 3-1/2" (89mm).

OPTIONAL ACCESSORIES


Bottom Grid: GBG1415SS Cutting Board: CB1516

Drain: D1125

Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.

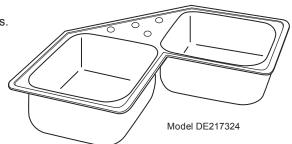





SINK DIMENSIONS

	Ove	erall	Inside Each Bowl			Cutout in Countertop (1-1/2"(38mm) Radius Corners)	No. of 1-1/2"(38mm) Dia. Faucet Holes 4"(102mm) Center	Minimum Cabinet Size
	L	W	L	W	D	Use sink upside down		
DE21732	31-7/8 (810mm)	31-7/8 (810mm)	15-3/4 (400mm)	14 (356mm)	7 (178mm)	as a Template and cut 5/16" (8mm) inside sink outline.	3 or 4	36 (Corner) (914mm)

^{*}Length is left to right. Width is front to back.

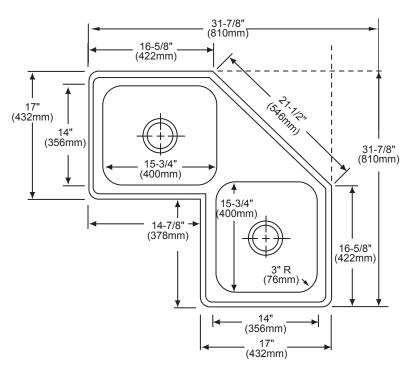



U-Channel Type Mounting System



Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers





In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functiona lbenefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.