

GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel with **Perfect Drain**. Top mount.

DESIGN FEATURES

Bowl Depth: 10-1/8" (257mm), Overall 11-5/8" (295mm) Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Rim Height: 3/16" (9mm)

Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.

Underside: Fully undercoated to dampen sound and reduce condensation. DLR191910PD and DLR252110PD underside is fully protected by heavy duty Sound Guard[®] undercoating.

Perfect Drain: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation. Each sink shipped with one LKPD1 drain kit, or a garbage disposer can be installed for user convenience.

Patent Pending

OTHER


Drain opening: 3-3/8" (86mm)


Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2 Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.








Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

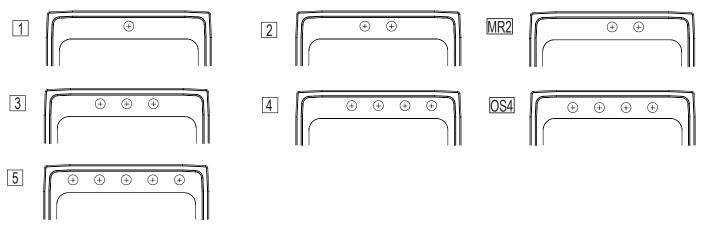

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


2222 Camden Court Oak Brook, IL 60523 Printed in U.S.A.




SINK DIMENSIONS*

Model	Overall L W D			Inside Bowl L W D			Cutout in Countertop [1 ¹ /2" (38mm) Radius Corners]		No. of 11/2" (38mm) Dia. Faucet Holes	Minimum Cabinet
Number	Α	В	С	D	Е	F	L	W	4" (102mm) Center	Size
DLR172210PD	17 (432mm)	22 (559mm)	11-5/8 (295mm)	13 ^{1/2} (343mm)	16 (406mm)	10-1/8 (257mm)	16-3/8 (416mm)	21-3/8 (543mm)	1, 2, MR2, 3, OS4	21 (533mm)
DLR191910PD	19 ¹ /2 (495mm)	19 (483mm)	11-5/8 (295mm)	16 (406mm)	13 ^{1/2} (343mm)	10-1/8 (257mm)	18-7/8 (479mm)	18-3/8 (467mm)	1, 2, MR2, 3, OS4	24 (610mm)
DLR221910PD	22 (559mm)	19-1/2 (495mm)	11-5/8 (295mm)	18 (457mm)	14 (356mm)	10-1/8 (257mm)	21-3/8 (543mm)	18-7/8 (479mm)	1, 2, MR2, 3, 4, 5	27 (686mm)
DLR252110PD	25 (635mm)	21-1/4 (540mm)	11-5/8 (295mm)	21 (533mm)	15 ^{3/4} (400mm)	10-1/8 (257mm)	24-3/8 (619mm)	20-5/8 (524mm)	1, 2, MR2, 3, 4, 5	30 (762mm ₎
DLR252210PD	25 (635mm)	22 (559mm)	11-5/8 (295mm)	21 (533mm)	15 ^{3/4} (400mm)	10-1/8 (257mm)	24-3/8 (619mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4, 5	30 (762mm)
DLR312210PD	31 (787mm)	22 (559mm)	11-5/8 (295mm)	28 (711mm)	16 (406mm)	10-1/8 (257mm)	30-3/8 (772mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4, 5	36 (914mm)
DLRS332210PD	33 (838mm)	22 (559mm)	11-5/8 (295mm)	28 (711mm)	16 (406mm)	10-1/8 (257mm)	32-3/8 (822mm)	21-3/8 (543mm)	1, 2, MR2, 3, 4, 5	36 (914mm)

*Length is left to right. Width is front to back.





Installation Profile Silicone Caulk (Not Furnished) Countertop

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

2222 Camden Court Oak Brook, IL 60523