

# DAYTON SPECIFICATIONS

## Dayton® Hospitality Sinks and Sink Package Models D11515, D11516 and DP211515C

### GENERAL

Sink is formed of #23 gauge, 300series, nickel bearing stainless steel. Topmount.

### DESIGN FEATURES

Bowl Depth: 5-1/8" (130mm)

Coved Corners: 2-1/4" (57mm) vertical and horizontal radius.

Finish: Exposed surfaces are polished to a satin finish.

Underside: Undercoated on bottom of bowls to reduce condensation and dampen sound.

### SINK PACKAGE

DP211515C Package includes:

(1) D11515 sink.

(1) LKA2475 faucet.

(1) D5018A drain with basket strainer.

### OTHER

Drain Opening: 2" (51mm) (D11515, DP211515C), 3-1/2" (89mm) (D11516).

NOTE: Unless otherwise specified, sink is furnished with 2 faucet holes as shown.

Installation Hardware: Included for 3/4" (19mm) countertop.


Sink complies with ASME A112.19.3/ CSA B45.4




Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.



These sinks are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

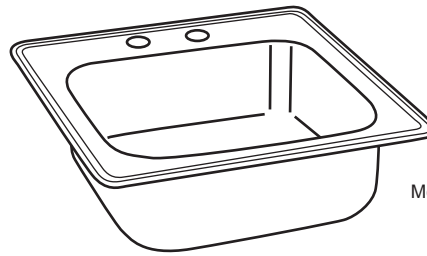

Model D115152

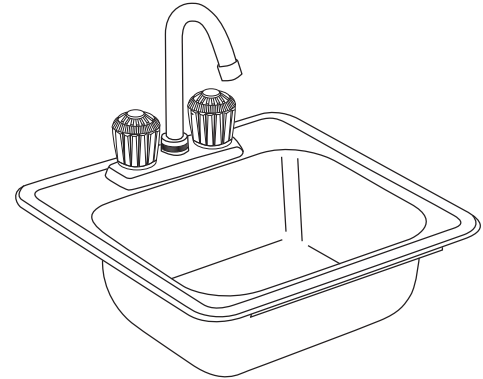


Model DP211515C

### SINK DIMENSIONS (INCHES)\*

Model Number	Overall		Inside Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Corners)		No. of 1-1/4" (32mm) or 1-1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	Minimum Cabinet Size
	L	W	L	W	D	L	W		
DP211515C	15 (381mm)	15 (381mm)	12 (305mm)	10 (254mm)	5-1/8 (130mm)	14-3/8 (365mm)	14-3/8 (365mm)	2	18 (457mm)
D11515	15 (381mm)	15 (381mm)	12 (305mm)	10 (254mm)	5-1/8 (130mm)	14-3/8 (365mm)	14-3/8 (365mm)	1, 2 or 3	18 (457mm)
D11516	15 (381mm)	15 (381mm)	12 (305mm)	10 (254mm)	5-1/8 (130mm)	14-3/8 (365mm)	14-3/8 (365mm)	1, 2 or 3	18 (457mm)

\*Length is left to right. Width is front to back.

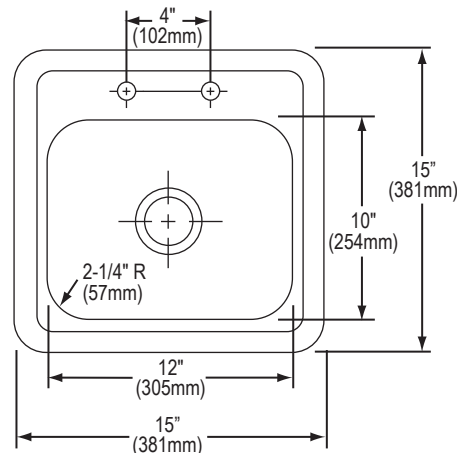


Bowl Depth is 5-1/8"  
Model D115152 Illustrated

Sinks Are



### HOLE DRILLING CONFIGURATIONS

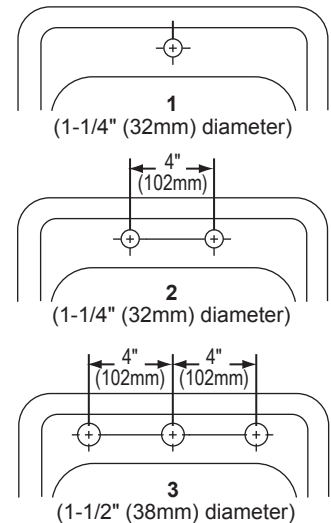

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkayusa.com](http://elkayusa.com) for most current version of Elkay Product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay

2222 Camden Court  
Oak Brook, IL 60523

©2014Elkay

[elkaypro.com](http://elkaypro.com)

(Rev.2/14) 02-03L