

**No Lead Wall Mount Water Cooler  
Barrier-Free Access  
Models EHFA-8 and EHFS-8**



**SPECIFICATIONS**

**GENERAL**

Self-contained, wall hung, electric refrigerated water cooler. Capacity, 7.6 GPH of 50°F drinking water, based upon 80°F inlet water and 90°F ambient.

**Model EHFA-8** has a hooded stream projector with self closing push bar control mounted on front only. Built in flow regulator from 20 to 105 psi. Bubbler stream fully protected to meet all sanitary codes.

**Model EHFS-8** has self closing push bars on front and both right and left sides, otherwise same as EHFA-8.

Non-pressurized tank system is standard. Non-pressurized water tank is located after bubbler valve, so that tank is subject to line pressure only when push bar is pressed.

**THIS WATER COOLER COMPLIES WITH THE REQUIREMENTS OF A.D.A. (AMERICANS WITH DISABILITIES ACT) WHEN PROPERLY INSTALLED.**

**NO LEAD DESIGN**

**THIS WATER COOLER COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.**

Elkay Water Coolers are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all lead materials, such as leaded brass, have been removed. All joints are brazed using silver solder only. No lead solder is permitted. A strainer with an easily cleanable screen is provided to allow trapping and convenient removal of water born particulate of 140 microns and larger prior to their entry into the water cooler.

 These water coolers are Classified by Underwriters Laboratories Inc. in accordance with **ANSI/NSF61, Section 9-1997b**.

**CAPACITIES CHART**

Model Number	Base Rate	**GPH of 50°F Drinking Water				Rated Watts	Full Load Amps	Glass† Filler Option	Ship. Wt. Lbs.
		Room Temperature °F							
		70°F	80°F	90°F	100°F				
EHFA-8	7.6	8.8	8.2	7.6	7.0	425	3.5	YES	72
EHFS-8	7.6	8.8	8.2	7.6	7.0	425	3.5	YES	73

\*\*Based on 80° inlet water temperature. †Glass filler available at extra cost. Requires factory preparation to receive glass filler. Glass filler LK-109a can be furnished.

Rated watts shown are based on operational (run) time, in accordance with ARI Standard 1010 conditions. Specific applications will determine the actual watts consumed per hour. Watts consumed will be based on number of people served per hour (usage), ambient temperatures, and inlet water temperature.

**COOLING SYSTEM**


**Motor Compressor:** Hermetically sealed, reciprocating type, 115V, 60 Hertz single phase. Sealed-in lifetime oil supply. Equipped with electric cord and three prong molded rubber plug.

**Condenser:** Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.


**Cooling Unit:** Combination tube-tank type. Self Cleansing. Tube portion is continuous coil of copper tubing. Fully insulated with EPS foam which meets Underwriters Laboratories requirements for self extinguishing plastic material.

**Refrigerant Control:** Refrigerant HFC-134a is controlled by accurately calibrated capillary tube for positively trouble free performance.

**Temperature Control:** Enclosed adjustable thermostat is factory pre-set. Requires no adjustment other than for altitude requirement.



Model EHFS-8



Model EHFA-8

**CONSTRUCTION**

**Frame:** #16 gauge galvanized steel chassis supports fountain top and all working mechanisms. No operating parts are connected to cabinet panels.

**Fountain Top and Backsplash:** One piece stainless steel top, polished to a uniform Elkay satin luster finish. Basin has removable perforated drain grid, embossed bubbler pad.

**Exclusive Flexi-Guard® Safety Bubbler\*:** Innovative design utilizes a pliable elastomer to prevent accidental mouth injuries. Flexes on impact, then returns to original position. Strong. Abrasion-resistant. Anti-sweat. Meets UL requirements and all sanitary codes.

**Color Selection:** Gray Beige vinyl furnished as standard unless alternate panel color is selected. Alternate panel colors in vinyl are: Granite, Sandalwood, and Natural Almond. All furnished at no extra cost. Stainless Steel units available at extra cost.

**5 YEAR LIMITED WARRANTY** on the refrigeration system of the unit. Electrical components and water system are warranted for 12 months from date of installation. Sample Certificate available on request.

Elkay Pressure-Type Water Coolers are designed to operate on 20 psi to 105 psi supply line pressure. If inlet pressure is above 105 psi, a pressure regulator must be installed in the supply line. Any damage caused by reason of connecting this product to supply line pressures lower than 20 psi or higher than 105 psi is not covered by the warranty.

**Note:** In keeping with our policy of continuing product improvement, Elkay reserves the right to change materials, design and specifications without notice.


Elkay Electric Air Cooled Water Coolers are listed by Underwriters Laboratories, approved by C.S.A., rated in accordance with A.R.I. Standard 1010 and meet all known federal and state plumbing codes.



\* Patent #4,481,971


**ROUGH-IN DIMENSIONS**

DETAIL "A"

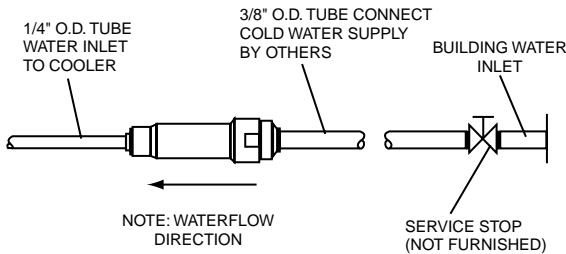

DETAIL "B"

**OPERATION OF QUICK CONNECT FITTINGS**

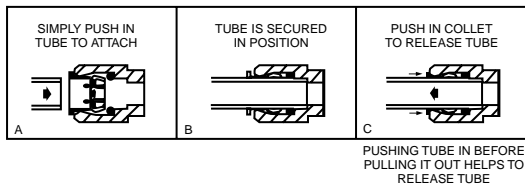

**INSTALLER PLEASE NOTE:**

**IMPORTANT**

THIS WATER COOLER HAS BEEN DESIGNED AND BUILT TO PROVIDE WATER TO THE USER WHICH HAS NOT BEEN ALTERED BY MATERIALS IN THE COOLER WATER WAYS.

THE GROUNDING OF ELECTRICAL EQUIPMENT SUCH AS TELEPHONE, COMPUTERS, ETC. TO WATER LINES IS A COMMON

THIS GROUNDING MAY BE IN THE BUILDING BUT MAY ALSO OCCUR AWAY FROM THE BUILDING. THIS GROUNDING CAN CAUSE ELECTRICAL FEEDBACK INTO A WATER COOLER CREATING AN ELECTROLYSIS WHICH CREATES A METALLIC TASTE OR CAUSES AN INCREASE IN THE METAL CONTENT OF THE WATER. THIS CONDITION IS AVOIDABLE BY INSTALLING THE COOLER USING THE PROPER MATERIALS AS SHOWN BELOW.

**NOTICE**

THIS WATER COOLER MUST BE CONNECTED TO THE WATER SUPPLY USING A DIELECTRIC COUPLING. THE COOLER IS FURNISHED WITH A NON-METALLIC STRAINER WHICH MEETS THIS REQUIREMENT.

THE DRAIN TRAP WHICH IS PROVIDED BY THE INSTALLER SHOULD ALSO BE PLASTIC TO COMPLETELY ISOLATE THE COOLER FROM THE BUILDING PLUMBING SYSTEM.

