



Hi-Arc[®] Single-Lever Kitchen Faucet Model LKE413945RS

FEATURES

- Two hole, single-lever top mount kitchen faucet
 - Two 1-1/2" (38.8mm) diameter faucet holes required
 - Maximum countertop thickness is 1-1/8" (28.6mm)
- Temperature and flow controlled by one movement of the single-lever handle
- Tubular high-arc, 45° swing spout with restricted flow aerator and brass escutcheon
- Highly polished, and chrome plated finish
- Removable cartridge
- 3/8" (10mm) O.D.; 10" (254mm) long; copper tube connections
- Ship Wt. 4 lbs. (1.8Kg)
- Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G.
 - 2.2 GPM/8.3 L/min at 60 P.S.I.G.


WARRANTY


• Limited Lifetime

COMPLIES WITH:

- ADA
- ANSI/NSF61 Certified
- ASME A112.18.1/CSA B125.1
- CA AB1953/VT S152



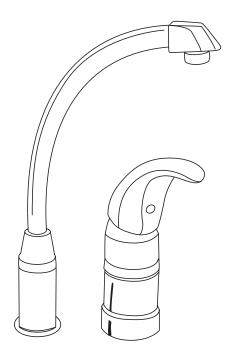

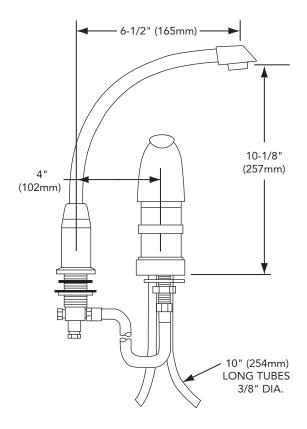

SEE OTHER SIDE FOR REPLACEMENT PARTS