



Air Conditioning & Heating

# SSX16

## HIGH-EFFICIENCY 2- TO 5-TON SPLIT SYSTEM AIR CONDITIONER

### UP TO 16 SEER

### R-410A

### COOLING CAPACITY: 24,000 TO 57,000 BTU/H

#### Standard Features

- R-410A chlorine-free refrigerant
- High-efficiency Copeland® scroll compressor
- High-quality compressor sound blanket
- High-pressure switch; low-pressure switch
- Factory-installed filter drier
- 850 RPM condenser fan motor
- Copper tube/enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

#### Cabinet Features

- Goodman® brand sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side compressor and tubing access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets 2001 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



#### Contents

Nomenclature .....	2
Product Specifications .....	3
Expanded Cooling Data .....	4
AHRI Ratings.....	22
Dimensions .....	53
Wiring Diagrams .....	54
Accessories .....	56



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home) and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.



NOMENCLATURE

	S	S	X	16	036	1	A	A	
	1	2	3	4,5	6,7,8	9	10	11	
<b>Brand</b>									<b>Engineering *</b>
G	Goodman® (Standard Feature Set Models)								Minor Revision
S	Goodman® (High Feature Set Models)								<b>Engineering *</b>
									Major Revision
<b>Product Category</b>									<b>Electrical</b>
S	Split System								
<b>Unit Type</b>									
C	Condenser R-22								1 208/230 V, 1 Phase, 60 Hz
X	Condenser R-410A								2 220/240 V, 1 Phase, 50 Hz
H	Heat Pump R-22								3 208/230 V, 3 Phase, 60 Hz
Z	Heat Pump R-410A								4 460 V, 3 Phase, 60 Hz
									5 380/415 V, 3 Phase, 50 Hz
<b>Efficiency</b>									<b>Nominal Capacity</b>
13	13 SEER								018 1½ Tons
14	14 SEER								024 2 Tons
16	16 SEER								060 5 Tons
									030 2½ Tons
									090 7½ tons
									036 3 Tons
									120 10 Tons
									042 3½ Tons

\* Neither used for order entry or inventory management.



**SPECIFICATIONS**

	<b>SSX16 0241B*</b>	<b>SSX16 0301A*</b>	<b>SSX16 0361B*</b>	<b>SSX16 0421A*</b>	<b>SSX16 0481B*</b>	<b>SSX16 0591A*</b>
<b>COOLING CAPACITY</b>						
Nominal Cooling (BTU/h)	24,000	30,000	36,000	42,000	48,000	60,000
Decibels	73.5	73.5	73.5	75	74	73.5
<b>COMPRESSOR</b>						
RLA	13.5	12.8	14.1	16.7	19.9	25.0
LRA	58.3	64	77	79	109	134
Condenser Fan Motor						
Horsepower (RPM)	1/6	1/6	1/6	1/4	1/4	1/4
FLA	1.10	1.10	1.10	1.50	1.50	1.50
<b>REFRIGERATION SYSTEM</b>						
Refrigerant Line Size <sup>1</sup>						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	sweat	Sweat	Sweat
Refrigerant Charge	97	96	102	109	138	251
<b>ELECTRICAL DATA</b>						
Voltage-Phase	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity <sup>2</sup>	18.0	17.1	18.7	22.4	26.4	32.8
Max. Overcurrent Protection <sup>3</sup>	30	25	30	35	45	50
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
<b>EQUIPMENT WEIGHT (LBS)</b>	175	182	164	182	282	284
<b>SHIP WEIGHT (LBS)</b>	193	200	182	200	304	306

<sup>1</sup> Tested and rated in accordance with ARI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — SSX160241B\* / CA\*F3636\*6\*\*\* +TXV+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	900	MBh	22.9	23.8	26.0	-	22.4	23.2	25.4	-	21.9	22.7	24.8	-	21.3	22.1	24.2	-	20.3	21.0	23.0	-	18.8	19.5	21.3	-
		S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
		kW	1.5	1.5	1.6	-	1.6	1.6	1.7	-	1.7	1.7	1.8	-	1.8	1.8	1.9	-	1.8	1.9	1.9	-	1.9	1.9	2.0	-
		Amps	5.5	5.7	5.8	-	6.0	6.1	6.3	-	6.5	6.6	6.9	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-
		Hi PR	213	230	242	-	239	258	272	-	272	293	309	-	310	334	352	-	349	375	396	-	385	415	438	-
	800	Lo PR	103	110	120	-	109	116	127	-	114	121	132	-	119	127	139	-	125	133	145	-	129	138	150	-
		MBh	22.3	23.1	25.3	-	21.7	22.5	24.7	-	21.2	22.0	24.1	-	20.7	21.5	23.5	-	19.7	20.4	22.3	-	18.2	18.9	20.7	-
		S/T	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-
		ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
		kW	1.5	1.5	1.6	-	1.6	1.6	1.7	-	1.7	1.7	1.8	-	1.8	1.8	1.8	-	1.8	1.9	1.9	-	1.9	1.9	2.0	-
		Hi PR	211	227	240	-	237	255	269	-	270	290	306	-	307	330	349	-	345	372	392	-	382	411	434	-
700	Lo PR	102	109	119	-	108	115	126	-	112	120	131	-	118	126	137	-	124	132	144	-	128	136	149	-	
	MBh	20.5	21.3	23.3	-	20.1	20.8	22.8	-	19.6	20.3	22.2	-	19.1	19.8	21.7	-	18.2	18.8	20.6	-	16.8	17.4	19.1	-	
	S/T	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.6	0.4	-	
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
	kW	1.5	1.5	1.5	-	1.6	1.6	1.6	-	1.6	1.6	1.6	-	1.7	1.7	1.7	-	1.8	1.8	1.9	-	1.8	1.9	1.9	-	
	Hi PR	205	220	233	-	230	247	261	-	261	281	297	-	298	320	338	-	335	361	381	-	370	398	421	-	

75	900	MBh	23.3	24.0	26.0	27.9	22.8	23.5	25.4	27.2	22.2	22.9	24.8	26.6	21.7	22.3	24.2	25.9	20.6	21.2	23.0	24.6	19.1	19.7	21.3	22.8
		S/T	0.8	0.7	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.6	0.4
		ΔT	20	18	15	10	20	19	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10
		kW	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1
		Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7
		Hi PR	216	232	245	255	242	260	275	287	275	296	313	326	313	337	356	371	352	379	400	418	389	419	442	461
	800	Lo PR	104	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162
		MBh	22.6	23.3	25.2	27.1	22.1	22.8	24.6	26.4	21.6	22.2	24.1	25.8	21.1	21.7	23.5	25.2	20.0	20.6	22.3	23.9	18.5	19.1	20.7	22.2
		S/T	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
		kW	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1
		Amps	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.6	6.5	6.6	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6
700	Hi PR	213	230	242	253	239	258	272	284	272	293	309	323	310	334	352	368	349	375	396	414	386	415	438	457	
	Lo PR	103	110	120	128	109	116	127	135	114	121	132	141	119	127	139	148	125	133	145	155	129	138	150	160	
	MBh	20.9	21.5	23.3	25.0	20.4	21.0	22.7	24.4	19.9	20.5	22.2	23.8	19.4	20.0	21.7	23.3	18.5	19.0	20.6	22.1	17.1	17.6	19.1	20.5	
	S/T	0.8	0.7	0.5	0.3	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10	
	kW	1.5	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.6	1.7	1.7	1.8	1.7	1.8	1.8	1.9	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	
Amps	5.4	5.5	5.7	5.9	5.8	5.9	6.1	6.4	6.3	6.5	6.7	6.9	6.7	6.9	7.1	7.4	7.2	7.4	7.6	7.9	7.6	7.8	8.1	8.4		
Hi PR	207	223	235	245	232	250	264	275	264	284	300	313	301	324	342	357	338	364	385	401	374	402	425	443		
Lo PR	100	107	117	124	106	113	123	131	110	117	128	136	116	123	134	143	121	129	141	150	125	133	146	155		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSX160241B\* / CA\*F3636\*6\*\* +TXV+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	23.7	24.3	25.9	27.7	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	22.1	22.6	24.1	25.8	21.0	21.4	22.9	24.5	19.4	19.9	21.2	22.7
	S/T	0.9	0.9	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6
	ΔT	22	21	18	15	22	21	19	15	23	22	19	15	23	22	19	15	21	22	19	15	20	20	17	14
	kW	1.5	1.5	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.8	1.9	1.8	1.8	1.9	1.9	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.1
	Amps	5.6	5.8	5.9	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	8.0	8.3	8.0	8.2	8.4	8.8
	Hi PR	218	234	247	258	244	263	278	290	278	299	316	329	316	341	360	375	356	383	405	422	393	423	447	466
	Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163
	MBh	23.0	23.5	25.2	26.9	22.5	23.0	24.6	26.3	22.0	22.4	24.0	25.6	21.4	21.9	23.4	25.0	20.4	20.8	22.2	23.8	18.9	19.3	20.6	22.0
	S/T	0.9	0.8	0.7	0.5	0.9	0.8	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.5	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6
	ΔT	23	22	19	15	23	22	19	16	23	22	19	16	24	23	20	16	23	22	19	15	22	21	18	14
	kW	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.9	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.1
	Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7
Hi PR	216	232	245	255	242	260	275	287	275	296	313	326	313	337	356	371	352	379	401	418	389	419	443	462	
Lo PR	105	111	121	129	110	117	128	137	115	122	133	142	121	128	140	149	126	134	147	156	131	139	152	162	
700	MBh	21.3	21.7	23.2	24.8	20.8	21.2	22.7	24.2	20.3	20.7	22.1	23.7	19.8	20.2	21.6	23.1	18.8	19.2	20.5	21.9	17.4	17.8	19.0	20.3
	S/T	0.8	0.8	0.6	0.5	0.9	0.8	0.7	0.5	0.9	0.8	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.5	1.0	0.9	0.7	0.6
	ΔT	23	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15
	kW	1.5	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.7	1.8	1.8	1.9	1.8	1.8	1.9	2.0	1.9	1.9	2.0	2.0
	Amps	5.4	5.6	5.7	5.9	5.9	6.0	6.2	6.4	6.4	6.5	6.7	7.0	6.8	7.0	7.2	7.5	7.2	7.4	7.7	8.0	7.7	7.9	8.1	8.4
	Hi PR	209	225	238	248	235	252	267	278	267	287	303	316	304	327	345	360	342	368	388	405	378	406	429	448
	Lo PR	101	108	118	125	107	114	124	132	111	118	129	138	117	124	136	145	123	130	142	152	127	135	147	157

85	MBh	24.1	24.6	25.8	27.5	23.6	24.0	25.2	26.9	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	21.3	21.8	22.8	24.3	19.8	20.2	21.1	22.5
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	1.0	0.8	1.0	1.0	1.0	0.8
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	23	23	22	19	22	22	22	19	20	21	21	18
	kW	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.8	1.7	1.8	1.8	1.9	1.8	1.8	1.9	2.0	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.1
	Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.7	6.8	7.1	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8
	Hi PR	220	237	250	261	247	265	280	292	281	302	319	333	320	344	363	379	360	387	409	426	397	427	451	471
	Lo PR	107	113	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	159	133	142	155	165
	MBh	23.4	23.9	25.0	26.7	22.9	23.3	24.4	26.1	22.4	22.8	23.9	25.5	21.8	22.2	23.3	24.8	20.7	21.1	22.1	23.6	19.2	19.6	20.5	21.9
	S/T	0.9	0.9	0.8	0.6	0.9	0.9	0.8	0.7	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	1.0	0.9	1.0	1.0	1.0	0.9
	ΔT	25	24	23	20	25	25	23	20	25	25	23	20	25	25	23	20	24	24	23	20	22	22	22	19
	kW	1.5	1.5	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.8	1.9	1.8	1.8	1.9	1.9	1.9	1.9	2.0	2.0	1.9	2.0	2.0	2.1
	Amps	5.6	5.8	5.9	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	8.0	8.3	8.0	8.2	8.4	8.8
Hi PR	218	234	247	258	244	263	278	290	278	299	316	329	316	341	360	375	356	383	405	422	393	423	447	466	
Lo PR	106	112	123	131	112	119	130	138	116	123	135	143	122	130	141	151	128	136	148	158	132	140	153	163	
MBh	21.6	22.1	23.1	24.6	21.1	21.5	22.6	24.1	20.6	21.0	22.0	23.5	20.1	20.5	21.5	22.9	19.1	19.5	20.4	21.8	17.7	18.1	18.9	20.2	
S/T	0.9	0.9	0.8	0.6	0.9	0.9	0.8	0.6	0.9	0.9	0.8	0.7	1.0	0.9	0.8	0.7	1.0	1.0	1.0	0.9	1.0	1.0	1.0	0.9	
ΔT	25	25	23	20	25	25	24	20	25	25	24	20	26	25	24	21	25	25	23	20	23	23	22	19	
kW	1.5	1.5	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.9	1.8	1.9	1.9	2.0	1.9	1.9	2.0	2.0	
Amps	5.5	5.6	5.8	6.0	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.1	6.9	7.0	7.3	7.5	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	
Hi PR	211	227	240	250	237	255	269	281	269	290	306	319	307	330	349	364	345	372	392	409	382	411	434	452	
Lo PR	102	109	119	127	108	115	126	134	112	120	131	139	118	126	137	146	124	132	144	152	128	136	149	158	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSSX160301A\* / CA\*F3642\*6C\*+TXV +EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	25.3	26.2	28.7	-	24.7	25.6	28.1	-	24.1	25.0	27.4	-	23.5	24.4	26.7	-	22.4	23.2	25.4	-	20.7	21.5	23.5	-
	S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-
	kW	1.84	1.87	1.92	-	1.96	1.99	2.05	-	2.06	2.10	2.16	-	2.16	2.20	2.26	-	2.24	2.28	2.35	-	2.31	2.35	2.42	-
	Amps	5.4	5.5	5.7	-	5.8	5.9	6.1	-	6.3	6.5	6.7	-	6.7	6.9	7.1	-	7.2	7.3	7.6	-	7.6	7.8	8.0	-
	Hi PR	219	235	249	-	245	264	279	-	279	300	317	-	318	342	361	-	358	385	406	-	395	425	449	-
	Lo PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	164	-
	MBh	27.4	28.4	31.1	-	26.8	27.8	30.4	-	26.1	27.1	29.7	-	25.5	26.4	29.0	-	24.2	25.1	27.5	-	22.4	23.3	25.5	-
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	1.87	1.91	1.96	-	2.00	2.04	2.09	-	2.11	2.15	2.21	-	2.21	2.25	2.31	-	2.29	2.33	2.40	-	2.36	2.41	2.48	-
	Amps	5.5	5.7	5.8	-	6.0	6.1	6.3	-	6.5	6.6	6.9	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-
Hi PR	225	243	256	-	253	272	287	-	288	310	327	-	328	353	372	-	369	397	419	-	407	438	463	-	
Lo PR	116	124	135	-	123	131	143	-	128	136	148	-	134	143	156	-	141	150	163	-	145	155	169	-	
MBh	28.4	29.4	32.2	-	27.7	28.7	31.5	-	27.1	28.0	30.7	-	26.4	27.4	30.0	-	25.1	26.0	28.5	-	23.2	24.1	26.4	-	
S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-	
ΔT	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	14	12	9	-	
kW	1.90	1.94	1.99	-	2.03	2.07	2.12	-	2.14	2.18	2.24	-	2.24	2.28	2.35	-	2.32	2.37	2.44	-	2.40	2.44	2.52	-	
Amps	5.6	5.8	5.9	-	6.1	6.2	6.4	-	6.6	6.8	7.0	-	7.1	7.2	7.5	-	7.5	7.7	8.0	-	8.0	8.2	8.4	-	
Hi PR	230	247	261	-	258	278	293	-	293	316	334	-	334	360	380	-	376	405	427	-	415	447	472	-	
Lo PR	119	126	138	-	125	133	146	-	130	139	151	-	137	146	159	-	143	153	167	-	148	158	172	-	
75	MBh	25.7	26.5	28.7	30.8	25.1	25.9	28.0	30.1	24.5	25.3	27.3	29.4	23.9	24.6	26.7	28.6	22.7	23.4	25.3	27.2	21.1	21.7	23.5	25.2
	S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40
	ΔT	22	20	17	12	22	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11
	kW	1.85	1.88	1.93	1.99	1.97	2.01	2.06	2.12	2.08	2.12	2.18	2.24	2.17	2.22	2.28	2.35	2.25	2.30	2.37	2.44	2.32	2.37	2.44	2.51
	Amps	5.4	5.6	5.7	5.9	5.9	6.0	6.2	6.4	6.4	6.5	6.7	7.0	6.8	7.0	7.2	7.5	7.2	7.4	7.7	8.0	7.7	7.9	8.1	8.4
	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	346	365	381	361	389	411	428	399	430	454	473
	Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	153	163	138	147	160	170	143	152	166	176
	MBh	27.9	28.7	31.1	33.4	27.2	28.0	30.4	32.6	26.6	27.4	29.6	31.8	25.9	26.7	28.9	31.0	24.6	25.4	27.5	29.5	22.8	23.5	25.4	27.3
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
	ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	kW	1.89	1.92	1.98	2.03	2.01	2.05	2.11	2.17	2.12	2.17	2.23	2.29	2.22	2.27	2.33	2.40	2.31	2.35	2.42	2.49	2.38	2.43	2.50	2.57
	Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7
Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488	
Lo PR	118	125	136	145	124	132	144	154	129	137	150	160	136	144	157	168	142	151	165	176	147	156	171	182	
MBh	28.9	29.7	32.2	34.5	28.2	29.0	31.4	33.7	27.5	28.3	30.7	32.9	26.8	27.6	29.9	32.1	25.5	26.3	28.4	30.5	23.6	24.3	26.3	28.3	
S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44	
ΔT	17	16	13	9	17	16	13	9	18	16	13	9	18	16	13	9	17	16	13	9	16	15	12	8	
kW	1.91	1.95	2.00	2.06	2.04	2.08	2.14	2.20	2.16	2.20	2.26	2.33	2.26	2.30	2.37	2.44	2.34	2.39	2.46	2.53	2.41	2.46	2.54	2.61	
Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.7	6.8	7.0	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8	
Hi PR	232	250	264	275	261	281	296	309	296	319	337	351	338	363	384	400	380	409	432	450	420	452	477	497	
Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160301A\* / CA\*F3642\*6C\* +TXV +EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	26.2	26.8	28.6	30.6	25.6	26.1	27.9	29.9	25.0	25.5	27.3	29.1	24.4	24.9	26.6	28.4	23.1	23.7	25.3	27.0	21.4	21.9	23.4	25.0
	S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	16
	kW	1.86	1.90	1.95	2.00	1.98	2.02	2.08	2.14	2.09	2.13	2.19	2.26	2.19	2.23	2.30	2.37	2.27	2.32	2.38	2.46	2.34	2.39	2.46	2.53
	Amps	5.5	5.6	5.8	6.0	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.0	6.9	7.0	7.3	7.5	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5
	Hi PR	223	240	254	265	250	269	285	297	285	306	324	338	324	349	369	384	365	393	415	433	403	434	458	478
	Lo PR	115	122	134	142	122	129	141	150	126	134	147	156	133	141	154	164	139	148	162	172	144	153	167	178
	MBh	28.4	29.0	31.0	33.1	27.7	28.3	30.3	32.3	27.1	27.6	29.5	31.6	26.4	27.0	28.8	30.8	25.1	25.6	27.4	29.3	23.2	23.7	25.4	27.1
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.59
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15
	kW	1.90	1.94	1.99	2.05	2.03	2.07	2.12	2.19	2.14	2.18	2.24	2.31	2.24	2.28	2.35	2.42	2.32	2.37	2.44	2.51	2.40	2.44	2.52	2.59
	Amps	5.6	5.8	5.9	6.2	6.1	6.2	6.4	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	8.0	8.3	8.0	8.2	8.4	8.8
Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	428	446	416	447	472	493	
Lo PR	119	126	138	147	125	133	146	155	130	139	151	161	137	146	159	169	143	153	167	177	148	158	172	184	
MBh	29.4	30.0	32.1	34.3	28.7	29.3	31.3	33.5	28.0	28.6	30.6	32.7	27.3	27.9	29.8	31.9	26.0	26.5	28.3	30.3	24.0	24.6	26.2	28.1	
S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63	
ΔT	19	18	16	13	20	19	16	13	19	19	16	13	19	19	16	13	18	18	16	13	16	17	15	12	
kW	1.93	1.96	2.02	2.07	2.06	2.10	2.16	2.22	2.17	2.21	2.28	2.34	2.27	2.32	2.39	2.46	2.36	2.41	2.48	2.55	2.43	2.48	2.56	2.63	
Amps	5.7	5.9	6.1	6.3	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.4	7.2	7.4	7.6	7.9	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	
Hi PR	235	253	267	278	263	283	299	312	299	322	340	355	341	367	388	404	384	413	436	455	424	456	482	503	
Lo PR	121	129	141	150	128	136	149	158	133	141	154	164	140	149	162	173	146	156	170	181	151	161	176	187	
85	MBh	26.7	27.2	28.5	30.4	26.0	26.5	27.8	29.6	25.4	25.9	27.1	28.9	24.8	25.3	26.5	28.2	23.6	24.0	25.1	26.8	21.8	22.2	23.3	24.8
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74
	ΔT	26	26	25	21	27	26	25	22	27	26	25	22	27	27	25	22	25	26	25	21	24	24	23	20
	kW	1.87	1.91	1.96	2.02	2.00	2.04	2.09	2.15	2.11	2.15	2.21	2.28	2.21	2.25	2.31	2.38	2.29	2.33	2.40	2.47	2.36	2.41	2.48	2.55
	Amps	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.5	6.5	6.6	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.3	8.6
	Hi PR	225	243	256	267	253	272	287	300	288	310	327	341	328	353	372	388	369	397	419	437	407	438	463	483
	Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	141	150	163	174	145	155	169	180
	MBh	28.9	29.4	30.8	32.9	28.2	28.7	30.1	32.1	27.5	28.1	29.4	31.4	26.9	27.4	28.7	30.6	25.5	26.0	27.2	29.1	23.6	24.1	25.2	26.9
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77
	ΔT	25	25	23	20	26	25	24	21	25	25	24	21	25	25	24	21	23	24	24	20	22	22	22	19
	kW	1.91	1.95	2.00	2.06	2.04	2.08	2.14	2.20	2.16	2.20	2.26	2.33	2.26	2.30	2.37	2.44	2.34	2.39	2.46	2.53	2.41	2.46	2.54	2.61
	Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.7	6.8	7.1	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8
Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498	
Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185	
MBh	29.9	30.5	31.9	34.0	29.2	29.8	31.2	33.2	28.5	29.0	30.4	32.5	27.8	28.3	29.7	31.7	26.4	26.9	28.2	30.1	24.5	24.9	26.1	27.9	
S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.82	
ΔT	20	20	19	17	20	20	19	17	19	20	19	17	19	19	20	17	18	18	19	17	17	17	18	16	
kW	1.94	1.98	2.03	2.09	2.07	2.11	2.17	2.23	2.19	2.23	2.29	2.36	2.29	2.33	2.40	2.48	2.38	2.42	2.50	2.57	2.45	2.50	2.58	2.65	
Amps	5.8	5.9	6.1	6.3	6.2	6.4	6.6	6.9	6.8	6.9	7.2	7.5	7.3	7.4	7.7	8.0	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	
Hi PR	237	255	269	281	266	286	302	315	302	325	344	358	344	371	391	408	388	417	440	459	428	461	487	508	
Lo PR	122	130	142	151	129	137	150	160	134	143	156	166	141	150	164	174	148	157	172	183	153	163	178	189	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



EXPANDED COOLING DATA — S5X160301A\* / CA\*F3642\*6C\* +TXV/MBVC1600\*\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	25.6	26.5	29.1	-	24.4	25.3	27.7	-	23.8	24.7	27.1	-	22.6	23.5	25.7	-	21.0	21.7	23.8	-	21.0	21.7	23.8	-
		S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	0.81	0.67	0.47
	ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-
		kW	1.73	1.76	1.81	-	1.85	1.88	1.94	-	2.04	2.08	2.15	-	2.12	2.16	2.23	-	2.19	2.23	2.30	-	2.19	2.23	2.30
	Amps	6.3	6.4	6.7	-	6.8	7.0	7.2	-	7.9	8.0	8.3	-	8.4	8.6	8.8	-	8.8	9.1	9.4	-	8.8	9.1	9.4	-
		Hi PR	220	237	250	-	247	266	281	-	320	345	364	-	360	388	410	-	398	429	453	-	398	429	453
	Lo PR	113	120	131	-	119	127	138	-	124	132	144	-	130	138	151	-	136	145	158	-	141	150	164	-
		MBh	27.8	28.8	31.5	-	27.1	28.1	30.8	-	25.8	26.8	29.3	-	24.5	25.4	27.9	-	22.7	23.5	25.8	-	22.7	23.5	25.8
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	17	15	11
	kW	1.77	1.80	1.85	-	1.89	1.92	1.98	-	1.99	2.03	2.09	-	2.09	2.13	2.20	-	2.17	2.21	2.28	-	2.24	2.29	2.36	-
		Amps	6.5	6.6	6.8	-	7.0	7.1	7.4	-	7.6	7.7	8.0	-	8.1	8.3	8.5	-	8.6	8.8	9.1	-	9.1	9.3	9.6
Hi PR	227	245	258	-	255	274	290	-	290	312	330	-	330	355	375	-	372	400	422	-	411	442	467	-	
	Lo PR	116	124	135	-	123	131	143	-	128	136	148	-	134	143	156	-	141	150	163	-	145	155	169	-
MBh	28.7	29.8	32.6	-	28.1	29.1	31.9	-	27.4	28.4	31.1	-	26.7	27.7	30.3	-	25.4	26.3	28.8	-	23.5	24.4	26.7	-	
	S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-
ΔT	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	15	13	10	-	14	12	9	-	
	kW	1.79	1.82	1.88	-	1.91	1.95	2.01	-	2.02	2.06	2.13	-	2.12	2.16	2.23	-	2.20	2.25	2.32	-	2.27	2.32	2.39	-
Amps	6.6	6.7	7.0	-	7.1	7.3	7.5	-	7.7	7.9	8.1	-	8.2	8.4	8.7	-	8.7	9.0	9.2	-	9.3	9.5	9.8	-	
	Hi PR	232	249	263	-	260	280	296	-	296	318	336	-	337	363	383	-	379	408	431	-	419	451	476	-
Lo PR	119	126	138	-	125	133	146	-	130	139	151	-	137	146	159	-	143	153	167	-	148	158	172	-	
75	MBh	26.0	26.8	29.0	31.2	25.4	26.2	28.4	30.4	24.8	25.6	27.7	29.7	24.2	24.9	27.0	29.0	23.0	23.7	25.7	27.5	21.3	22.0	23.8	25.5
		S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
		kW	1.74	1.77	1.82	1.88	1.86	1.90	1.95	2.01	1.96	2.00	2.06	2.12	2.06	2.10	2.16	2.23	2.14	2.18	2.25	2.32	2.20	2.25	2.32
	Amps	6.4	6.5	6.7	7.0	6.9	7.0	7.2	7.5	7.4	7.6	7.9	8.1	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3	8.9	9.1	9.4	9.8
		Hi PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	402	433	457
	Lo PR	114	121	132	141	120	128	140	149	125	133	145	155	131	140	153	163	138	147	160	170	143	152	166	176
		MBh	28.2	29.1	31.5	33.8	27.6	28.4	30.7	33.0	26.9	27.7	30.0	32.2	26.3	27.0	29.3	31.4	24.9	25.7	27.8	29.8	23.1	23.8	25.7
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15
	kW	1.78	1.81	1.86	1.92	1.90	1.94	1.99	2.05	2.01	2.05	2.11	2.17	2.11	2.15	2.21	2.28	2.19	2.23	2.30	2.37	2.26	2.30	2.37	2.45
		Amps	6.5	6.7	6.9	7.1	7.0	7.2	7.4	7.7	7.6	7.8	8.1	8.4	8.2	8.3	8.6	8.9	8.7	8.9	9.2	9.5	9.2	9.4	9.7
Hi PR	230	247	261	272	258	277	293	305	293	315	333	347	334	359	379	395	375	404	427	445	415	446	471	492	
	Lo PR	118	125	136	145	124	132	144	154	129	137	150	160	136	144	157	168	142	151	165	176	147	156	171	182
MBh	29.2	30.1	32.6	34.9	28.5	29.4	31.8	34.1	27.9	28.7	31.0	33.3	27.2	28.0	30.3	32.5	25.8	26.6	28.8	30.9	23.9	24.6	26.6	28.6	
	S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44
ΔT	17	16	13	9	18	16	13	9	18	16	13	9	18	16	13	9	18	16	13	9	16	15	12	9	
	kW	1.80	1.84	1.89	1.95	1.93	1.97	2.02	2.09	2.04	2.08	2.14	2.21	2.14	2.18	2.25	2.32	2.22	2.27	2.34	2.41	2.29	2.34	2.41	2.49
Amps	6.6	6.8	7.0	7.3	7.2	7.3	7.6	7.9	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	9.3	9.6	9.9	10.3	
	Hi PR	234	252	266	278	263	283	299	311	299	322	340	354	340	366	387	403	383	412	435	454	423	455	481	501
Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)



EXPANDED COOLING DATA — SSX160301A\* / CA\*F3642\*6C\* +TXV/MBVC1600\*\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	26.5	27.1	28.9	30.9	25.9	26.5	28.3	30.2	25.3	25.8	27.6	29.5	24.7	25.2	26.9	28.8	23.4	23.9	25.6	27.3	21.7	22.2	23.7	25.3
	S/T	0.88	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57
	ΔT	25	24	21	17	25	24	21	17	26	25	21	17	26	25	21	17	25	24	21	17	24	23	20	16
	kW	1.75	1.79	1.84	1.89	1.87	1.91	1.96	2.02	1.98	2.02	2.08	2.14	2.07	2.12	2.18	2.25	2.15	2.20	2.26	2.33	2.22	2.27	2.34	2.41
	Amps	6.4	6.6	6.8	7.0	6.9	7.1	7.3	7.6	7.5	7.7	7.9	8.2	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.9
	Hi PR	225	242	256	267	252	272	287	299	287	309	326	340	327	352	372	387	368	396	418	436	406	437	462	482
	Lo PR	115	122	134	142	122	129	141	150	126	134	147	156	133	141	154	164	139	148	162	172	144	153	167	178
	MBh	28.7	29.4	31.4	33.5	28.1	28.7	30.6	32.7	27.4	28.0	29.9	32.0	26.7	27.3	29.2	31.2	25.4	25.9	27.7	29.6	23.5	24.0	25.7	27.4
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.59
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	22	22	19	15
1000	kW	1.79	1.83	1.88	1.93	1.92	1.95	2.01	2.07	2.02	2.07	2.13	2.19	2.12	2.16	2.23	2.30	2.20	2.25	2.32	2.39	2.27	2.32	2.39	2.47
	Amps	6.6	6.7	7.0	7.2	7.1	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.2	8.4	8.7	9.0	8.7	9.0	9.3	9.6	9.3	9.5	9.8	10.2
	Hi PR	232	250	264	275	260	280	296	308	296	318	336	351	337	363	383	399	379	408	431	449	419	451	476	497
	Lo PR	119	126	138	147	125	133	146	155	130	139	151	161	137	146	159	169	143	153	167	177	148	158	172	184
	MBh	29.7	30.4	32.5	34.7	29.0	29.7	31.7	33.9	28.3	29.0	30.9	33.1	27.7	28.3	30.2	32.3	26.3	26.8	28.7	30.7	24.3	24.9	26.6	28.4
	S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63
	ΔT	20	19	16	13	20	19	16	13	19	19	16	13	19	19	17	13	18	18	16	13	17	17	15	12
	kW	1.82	1.85	1.90	1.96	1.94	1.98	2.04	2.10	2.06	2.10	2.16	2.23	2.15	2.20	2.26	2.33	2.24	2.28	2.35	2.43	2.31	2.36	2.43	2.51
	Amps	6.7	6.9	7.1	7.3	7.2	7.4	7.6	7.9	7.8	8.0	8.3	8.6	8.4	8.6	8.9	9.2	8.9	9.1	9.4	9.8	9.4	9.7	10.0	10.4
	Hi PR	237	255	269	280	265	286	302	315	302	325	343	358	344	370	391	407	387	416	439	458	427	460	486	506
Lo PR	121	129	141	150	128	136	149	158	133	141	154	164	140	149	162	173	146	156	170	181	151	161	176	187	

850	MBh	27.0	27.5	28.8	30.7	26.3	26.9	28.1	30.0	25.7	26.2	27.5	29.3	25.1	25.6	26.8	28.6	23.8	24.3	25.4	27.2	22.1	22.5	23.6	25.2
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74
	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	26	26	25	22	24	24	23	20
	kW	1.77	1.80	1.85	1.90	1.89	1.92	1.98	2.04	1.99	2.03	2.09	2.16	2.09	2.13	2.20	2.26	2.17	2.21	2.28	2.35	2.24	2.29	2.36	2.43
	Amps	6.5	6.6	6.8	7.1	7.0	7.1	7.4	7.6	7.6	7.7	8.0	8.3	8.1	8.3	8.5	8.9	8.6	8.8	9.1	9.4	9.1	9.3	9.6	10.0
	Hi PR	227	244	258	269	255	274	290	302	290	312	329	344	330	355	375	391	371	400	422	440	410	442	466	486
	Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	141	150	163	174	145	155	169	180
	MBh	29.2	29.8	31.2	33.3	28.5	29.1	30.5	32.5	27.9	28.4	29.7	31.7	27.2	27.7	29.0	31.0	25.8	26.3	27.6	29.4	23.9	24.4	25.5	27.2
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77
	ΔT	26	25	24	21	26	25	24	21	26	25	24	21	25	25	24	21	24	24	24	21	22	22	22	19
1000	kW	1.80	1.84	1.89	1.95	1.93	1.97	2.02	2.09	2.04	2.08	2.14	2.21	2.14	2.18	2.25	2.32	2.22	2.27	2.34	2.41	2.29	2.34	2.41	2.49
	Amps	6.6	6.8	7.0	7.3	7.2	7.3	7.6	7.9	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	9.3	9.6	9.9	10.3
	Hi PR	234	252	266	278	263	283	299	311	299	322	340	354	340	366	387	403	383	412	435	454	423	455	481	502
	Lo PR	120	128	139	148	127	135	147	157	132	140	153	163	138	147	161	171	145	154	168	179	150	159	174	185
	MBh	30.2	30.8	32.3	34.5	29.5	30.1	31.5	33.7	28.8	29.4	30.8	32.8	28.1	28.7	30.0	32.0	26.7	27.2	28.5	30.4	24.8	25.2	26.4	28.2
	S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.82
	ΔT	21	20	19	17	20	21	20	17	20	20	20	17	19	20	20	17	18	19	19	17	17	17	18	16
	kW	1.83	1.87	1.92	1.98	1.96	2.00	2.06	2.12	2.07	2.11	2.18	2.24	2.17	2.21	2.28	2.35	2.25	2.30	2.37	2.45	2.33	2.38	2.45	2.53
	Amps	6.8	6.9	7.1	7.4	7.3	7.5	7.7	8.0	7.9	8.1	8.4	8.7	8.5	8.7	8.9	9.3	9.0	9.2	9.5	9.9	9.5	9.7	10.1	10.4
	Hi PR	239	257	271	283	268	288	305	318	305	328	346	361	347	374	395	412	391	420	444	463	432	464	490	512
Lo PR	122	130	142	151	129	137	150	160	134	143	156	166	141	150	164	174	148	157	172	183	153	163	178	189	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160361B\* / CA\*F4860\*6\*\* +TXV+EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	33.7	34.9	38.3	-	32.9	34.1	37.4	-	32.1	33.3	36.5	-	31.4	32.5	35.6	-	29.8	30.9	33.8	-	27.6	28.6	31.3	-
	S/T	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.9	0.7	0.5	-	0.9	0.7	0.5	-
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	12	-	16	14	11	-
	kW	2.2	2.2	2.3	-	2.3	2.4	2.4	-	2.4	2.5	2.6	-	2.6	2.6	2.7	-	2.7	2.7	2.8	-	2.8	2.8	2.9	-
	Amps	9.1	9.3	9.6	-	9.8	10.0	10.3	-	10.6	10.8	11.1	-	11.3	11.5	11.9	-	12.0	12.2	12.6	-	12.6	12.9	13.4	-
	Hi PR	225	242	256	-	253	272	287	-	288	309	327	-	328	352	372	-	368	396	419	-	407	438	463	-
	Lo PR	109	116	127	-	116	123	134	-	120	128	139	-	126	134	146	-	132	141	154	-	137	145	159	-
	MBh	32.7	33.9	37.2	-	32.0	33.1	36.3	-	31.2	32.3	35.4	-	30.4	31.6	34.6	-	28.9	30.0	32.8	-	26.8	27.8	30.4	-
	S/T	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-
	ΔT	18	16	12	-	18	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	2.1	2.2	2.2	-	2.3	2.3	2.4	-	2.4	2.5	2.6	-	2.5	2.6	2.7	-	2.6	2.7	2.8	-	2.7	2.8	2.9	-
	Amps	9.0	9.2	9.5	-	9.7	9.9	10.2	-	10.5	10.7	11.1	-	11.2	11.4	11.8	-	11.8	12.1	12.5	-	12.5	12.8	13.2	-
Hi PR	223	240	254	-	250	269	284	-	285	306	324	-	324	349	368	-	365	393	415	-	403	434	458	-	
Lo PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-	135	144	157	-	
MBh	30.2	31.3	34.3	-	29.5	30.6	33.5	-	28.8	29.9	32.7	-	28.1	29.1	31.9	-	26.7	27.7	30.3	-	24.7	25.6	28.1	-	
S/T	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.7	0.6	0.4	-	0.8	0.6	0.4	-	0.8	0.7	0.5	-	0.8	0.7	0.5	-	
ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	
kW	2.1	2.1	2.2	-	2.2	2.3	2.4	-	2.4	2.4	2.5	-	2.5	2.5	2.6	-	2.6	2.6	2.7	-	2.7	2.7	2.8	-	
Amps	8.7	8.9	9.2	-	9.4	9.6	9.9	-	10.2	10.4	10.8	-	10.9	11.1	11.5	-	11.5	11.8	12.2	-	12.2	12.5	12.9	-	
Hi PR	216	233	246	-	243	261	276	-	276	297	314	-	315	338	357	-	354	381	402	-	391	421	444	-	
Lo PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	153	-	

75	MBh	34.3	35.3	38.2	41.0	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.8	35.5	38.1	30.3	31.2	33.8	36.2	28.1	28.9	31.3	33.6
	S/T	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.9	0.6	0.4	1.0	0.9	0.7	0.4	1.0	0.9	0.7	0.4
	ΔT	20	19	15	11	21	19	15	11	21	19	15	11	21	19	16	11	20	19	15	11	19	18	14	10
	kW	2.2	2.2	2.3	2.3	2.3	2.4	2.4	2.5	2.5	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	2.8	2.8	2.9	3.0
	Amps	9.1	9.3	9.6	10.0	9.8	10.1	10.4	10.8	10.7	10.9	11.3	11.7	11.4	11.6	12.0	12.4	12.1	12.3	12.7	13.2	12.8	13.1	13.5	14.0
	Hi PR	228	245	259	270	255	275	290	303	290	313	330	344	331	356	376	392	372	401	423	441	411	443	467	487
	Lo PR	110	118	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165	138	147	160	171
	MBh	33.3	34.3	37.1	39.8	32.5	33.5	36.2	38.9	31.7	32.7	35.4	38.0	31.0	31.9	34.5	37.0	29.4	30.3	32.8	35.2	27.2	28.1	30.4	32.6
	S/T	0.8	0.7	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	1.0	0.8	0.6	0.4
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	kW	2.2	2.2	2.3	2.3	2.3	2.4	2.4	2.5	2.4	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	2.8	2.8	2.9	3.0
	Amps	9.1	9.3	9.6	9.9	9.8	10.0	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.5	11.9	12.3	12.0	12.2	12.6	13.1	12.6	12.9	13.4	13.9
Hi PR	225	243	256	267	253	272	287	300	288	310	327	341	328	353	372	388	369	397	419	437	407	438	463	483	
Lo PR	109	116	127	135	116	123	134	143	120	128	139	149	126	134	147	156	132	141	154	164	137	145	159	169	
MBh	30.7	31.6	34.2	36.7	30.0	30.9	33.4	35.9	29.3	30.2	32.6	35.0	28.6	29.4	31.8	34.2	27.1	28.0	30.3	32.5	25.1	25.9	28.0	30.1	
S/T	0.8	0.7	0.5	0.3	0.8	0.7	0.6	0.4	0.8	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	0.9	0.8	0.6	0.4	
ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11	
kW	2.1	2.1	2.2	2.3	2.3	2.3	2.4	2.4	2.4	2.4	2.5	2.6	2.5	2.6	2.6	2.7	2.6	2.7	2.7	2.8	2.7	2.7	2.8	2.9	
Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.9	11.2	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7	12.3	12.6	13.0	13.5	
Hi PR	219	235	248	259	245	264	279	291	279	300	317	331	318	342	361	377	357	385	406	424	395	425	449	468	
Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160361B\* / CA\*F4860\*6\*\* +TXV+EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1350	MBh	34.9	35.7	38.1	40.7	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.4	37.9	30.8	31.5	33.7	36.0	28.6	29.2	31.2	33.3
		S/T	1.0	0.9	0.7	0.5	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6
		ΔT	2.3	2.2	1.9	1.5	2.3	2.2	1.9	1.5	2.3	2.2	1.9	1.5	2.2	2.3	1.9	1.5	2.1	2.1	1.9	1.5	1.9	2.0	1.8	1.4
		kW	2.2	2.2	2.3	2.4	2.3	2.4	2.5	2.5	2.5	2.5	2.6	2.7	2.6	2.7	2.7	2.8	2.7	2.8	2.9	2.9	2.8	2.9	2.9	3.0
		Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.7	11.0	11.4	11.8	11.5	11.7	12.1	12.6	12.2	12.5	12.9	13.3	12.9	13.2	13.6	14.1
		Hi PR	230	247	261	273	258	278	293	306	293	316	333	348	334	360	380	396	376	405	427	446	415	447	472	492
	1200	Lo PR	112	119	130	138	118	125	137	146	123	130	142	152	129	137	149	159	135	143	157	167	140	148	162	173
		MBh	33.9	34.6	37.0	39.5	33.1	33.8	36.1	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	29.9	30.6	32.7	34.9	27.7	28.3	30.3	32.4
		S/T	0.9	0.9	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6
		ΔT	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.3	2.3	2.0	1.6	2.1	2.1	1.8	1.5
		kW	2.2	2.2	2.3	2.3	2.3	2.4	2.4	2.5	2.5	2.5	2.6	2.7	2.6	2.6	2.7	2.8	2.7	2.7	2.8	2.9	2.8	2.8	2.9	3.0
		Amps	9.1	9.3	9.6	10.0	9.8	10.1	10.4	10.8	10.7	10.9	11.3	11.7	11.4	11.6	12.0	12.4	12.1	12.3	12.7	13.2	12.8	13.1	13.5	14.0
1050	Hi PR	228	245	259	270	255	275	290	303	291	313	330	344	331	356	376	392	372	401	423	441	411	443	467	487	
	Lo PR	110	118	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165	138	147	160	171	
	MBh	31.3	31.9	34.1	36.5	30.5	31.2	33.3	35.6	29.8	30.5	32.5	34.8	29.1	29.7	31.8	33.9	27.6	28.2	30.2	32.2	25.6	26.2	27.9	29.9	
	S/T	0.9	0.8	0.7	0.5	0.9	0.9	0.7	0.5	0.9	0.9	0.7	0.5	1.0	0.9	0.7	0.5	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	
	ΔT	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.4	2.3	2.0	1.6	2.3	2.2	1.9	1.5	
	kW	2.1	2.2	2.2	2.3	2.3	2.3	2.4	2.5	2.4	2.5	2.5	2.6	2.5	2.6	2.7	2.7	2.6	2.7	2.8	2.8	2.7	2.8	2.9	2.9	

85	1350	MBh	35.5	36.2	37.9	40.4	34.7	35.3	37.0	39.5	33.8	34.5	36.1	38.6	33.0	33.7	35.3	37.6	31.4	32.0	33.5	35.7	29.1	29.6	31.0	33.1
		S/T	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.8	1.0	1.0	0.9	0.8
		ΔT	2.4	2.4	2.2	1.9	2.4	2.4	2.3	2.0	2.3	2.3	2.3	2.0	2.2	2.3	2.3	2.0	2.1	2.2	2.3	2.0	2.0	2.0	2.0	2.1
		kW	2.2	2.2	2.3	2.4	2.4	2.4	2.5	2.6	2.5	2.6	2.6	2.7	2.6	2.7	2.8	2.9	2.7	2.8	2.9	3.0	2.8	2.9	3.0	3.1
		Amps	9.3	9.5	9.8	10.2	10.0	10.2	10.6	10.9	10.8	11.1	11.5	11.9	11.6	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.3	13.7	14.2
		Hi PR	232	250	264	275	261	280	296	309	296	319	337	351	338	363	384	400	380	409	432	450	420	451	477	497
	1200	Lo PR	113	120	131	139	119	127	138	147	124	132	144	153	130	138	151	161	136	145	158	169	141	150	164	174
		MBh	34.5	35.1	36.8	39.3	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.4	32.1	32.7	34.2	36.5	30.5	31.0	32.5	34.7	28.2	28.8	30.1	32.1
		S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.8	1.0	1.0	1.0	0.8
		ΔT	2.5	2.5	2.3	2.0	2.5	2.5	2.4	2.0	2.5	2.5	2.4	2.0	2.5	2.5	2.4	2.1	2.3	2.4	2.4	2.0	2.2	2.2	2.2	1.9
		kW	2.2	2.2	2.3	2.4	2.3	2.4	2.5	2.5	2.5	2.5	2.6	2.7	2.6	2.7	2.7	2.8	2.7	2.8	2.9	2.9	2.8	2.9	2.9	3.0
		Amps	9.2	9.4	9.7	10.1	9.9	10.2	10.5	10.9	10.7	11.0	11.4	11.8	11.5	11.7	12.1	12.6	12.2	12.5	12.9	13.3	12.9	13.2	13.6	14.1
1050	Hi PR	230	247	261	273	258	278	293	306	293	316	333	348	334	360	380	396	376	405	427	446	415	447	472	492	
	Lo PR	112	119	130	138	118	125	137	146	123	130	142	152	129	137	149	159	135	143	157	167	140	148	162	173	
	MBh	31.8	32.4	34.0	36.2	31.1	31.7	33.2	35.4	30.3	30.9	32.4	34.5	29.6	30.2	31.6	33.7	28.1	28.7	30.0	32.0	26.0	26.5	27.8	29.7	
	S/T	0.9	0.9	0.8	0.6	1.0	0.9	0.8	0.7	1.0	0.9	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	
	ΔT	2.6	2.5	2.4	2.1	2.6	2.5	2.4	2.1	2.6	2.5	2.4	2.1	2.6	2.6	2.4	2.1	2.5	2.5	2.4	2.1	2.3	2.3	2.2	1.9	
	kW	2.1	2.2	2.2	2.3	2.3	2.3	2.4	2.5	2.4	2.5	2.5	2.6	2.5	2.6	2.7	2.8	2.6	2.7	2.8	2.9	2.7	2.8	2.9	3.0	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — S5X160421A\* / CA\*F4860\*6B\* +TXV +EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	34.2	35.4	38.8	-	33.4	34.6	37.9	-	32.6	33.8	37.0	-	31.8	33.0	36.1	-	30.2	31.3	34.3	-	28.0	29.0	31.8	-	
		S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
	1400	Δ T	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	
		kW	2.56	2.60	2.66	-	2.71	2.75	2.82	-	2.84	2.89	2.96	-	2.96	3.01	3.09	-	3.05	3.11	3.19	-	3.14	3.19	3.28	-	
	1575	Amps	7.7	7.9	8.2	-	8.3	8.5	8.8	-	9.0	9.2	9.5	-	9.6	9.8	10.1	-	10.2	10.4	10.8	-	10.8	11.0	11.4	-	
		HI PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-	
	75	1225	MBh	37.0	38.4	42.1	-	36.2	37.5	41.1	-	35.3	36.6	40.1	-	34.5	35.7	39.1	-	32.7	33.9	37.2	-	30.3	31.4	34.4	-
			S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
		1400	Δ T	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
			kW	2.61	2.65	2.71	-	2.76	2.81	2.88	-	2.90	2.95	3.02	-	3.02	3.07	3.15	-	3.12	3.17	3.26	-	3.20	3.26	3.35	-
		1575	Amps	7.9	8.1	8.4	-	8.6	8.7	9.0	-	9.3	9.5	9.8	-	9.9	10.1	10.4	-	10.5	10.7	11.1	-	11.1	11.3	11.7	-
			HI PR	224	241	255	-	252	271	286	-	286	308	325	-	326	351	370	-	367	395	417	-	405	436	460	-
75		1225	MBh	115	122	133	-	121	129	141	-	126	134	146	-	132	141	154	-	139	148	161	-	144	153	167	-
			S/T	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.74	0.51	-	0.89	0.74	0.51	-
		1400	Δ T	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
			kW	2.62	2.67	2.73	-	2.78	2.83	2.90	-	2.92	2.97	3.04	-	3.04	3.09	3.17	-	3.14	3.19	3.28	-	3.23	3.28	3.37	-
		1575	Amps	8.0	8.2	8.4	-	8.6	8.8	9.1	-	9.3	9.5	9.9	-	9.9	10.2	10.5	-	10.6	10.8	11.2	-	11.2	11.4	11.8	-
			HI PR	227	244	257	-	254	274	289	-	289	311	328	-	329	354	374	-	370	399	421	-	409	440	465	-
	75	1225	MBh	34.8	35.8	38.8	41.6	34.0	35.0	37.9	40.6	33.2	34.1	37.0	39.7	32.3	33.3	36.0	38.7	30.7	31.6	34.2	36.8	28.5	29.3	31.7	34.0
			S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
		1400	Δ T	21	19	16	11	21	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
			kW	2.58	2.62	2.68	2.75	2.73	2.77	2.84	2.91	2.86	2.91	2.98	3.06	2.98	3.03	3.11	3.19	3.07	3.13	3.21	3.30	3.16	3.22	3.30	3.39
		1575	Amps	7.8	8.0	8.2	8.5	8.4	8.6	8.9	9.2	9.1	9.3	9.6	9.9	9.7	9.9	10.2	10.6	10.3	10.5	10.9	11.3	10.9	11.1	11.5	11.9
			HI PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471
75		1225	MBh	113	120	131	139	119	127	138	147	124	131	144	153	130	138	151	161	136	145	158	168	141	150	163	174
			S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42
		1400	Δ T	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
			kW	2.62	2.67	2.73	2.80	2.78	2.83	2.90	2.97	2.92	2.97	3.04	3.12	3.04	3.09	3.17	3.26	3.14	3.19	3.28	3.37	3.23	3.28	3.37	3.47
		1575	Amps	8.0	8.2	8.4	8.7	8.6	8.8	9.1	9.4	9.3	9.6	9.9	10.2	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.4	11.8	12.2
			HI PR	227	244	257	269	254	274	289	301	289	311	329	343	329	354	374	390	370	399	421	439	409	441	465	485
	75	1225	MBh	116	123	135	144	123	130	142	152	127	136	148	158	134	142	155	166	140	149	163	173	145	154	168	179
			S/T	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.93	0.84	0.63	0.41	0.96	0.86	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.90	0.68	0.44
		1400	Δ T	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10
			kW	2.64	2.68	2.75	2.82	2.80	2.84	2.92	2.99	2.93	2.99	3.06	3.14	3.06	3.11	3.19	3.28	3.16	3.22	3.30	3.39	3.25	3.31	3.40	3.49
		1575	Amps	8.1	8.3	8.5	8.8	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.0	10.3	10.6	11.0	10.7	10.9	11.3	11.7	11.3	11.5	11.9	12.3
			HI PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	443	413	445	470	490
1575		LO PR	117	125	136	145	124	132	144	153	129	137	149	159	135	144	157	167	142	151	165	175	147	156	170	181	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160421A\* / CA\*F4860\*6B\* +TXV +EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1225	MBh	35.4	36.2	38.6	41.3	34.6	35.3	37.7	40.3	33.7	34.5	36.8	39.4	32.9	33.6	35.9	38.4	31.3	32.0	34.1	36.5	29.0	29.6	31.6	33.8	
		S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.01	0.95	0.77	0.58	1.02	0.95	0.78	0.58	
		Δ T	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	18	15	
	1400	kW	2.59	2.63	2.70	2.76	2.74	2.79	2.86	2.93	2.88	2.93	3.00	3.08	3.00	3.05	3.13	3.21	3.10	3.15	3.23	3.32	3.18	3.24	3.33	3.42	
		Amps	7.9	8.1	8.3	8.6	8.5	8.7	8.9	9.3	9.2	9.4	9.7	10.0	9.8	10.0	10.3	10.7	10.4	10.6	11.0	11.4	11.0	11.2	11.6	12.0	
		HI PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	
	1575	LO PR	114	121	132	141	120	128	139	149	125	133	145	154	131	139	152	162	137	146	160	170	142	151	165	176	
		MBh	38.3	39.2	41.9	44.7	37.5	38.3	40.9	43.7	36.6	37.4	39.9	42.7	35.7	36.4	38.9	41.6	33.9	34.6	37.0	39.5	31.4	32.1	34.3	36.6	
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	
	85	1225	Δ T	23	22	19	15	23	22	20	16	23	22	20	16	23	23	20	16	22	22	19	16	21	21	18	14
			kW	2.64	2.68	2.75	2.82	2.80	2.84	2.92	2.99	3.06	3.14	3.06	3.11	3.19	3.28	3.36	3.22	3.22	3.30	3.39	3.25	3.31	3.40	3.49	
			Amps	8.1	8.3	8.5	8.8	8.7	8.9	9.2	9.5	9.4	9.6	9.9	10.3	10.0	10.3	10.6	11.0	10.7	10.9	11.3	11.7	11.3	11.5	11.9	12.3
1400		HI PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	444	413	445	470	490	
		LO PR	117	125	136	145	124	132	144	153	129	137	149	159	135	144	157	167	142	151	165	175	147	156	170	181	
		MBh	39.5	40.4	43.1	46.1	38.6	39.4	42.1	45.0	37.7	38.5	41.1	43.9	36.7	37.5	40.1	42.9	34.9	35.7	38.1	40.7	32.3	33.0	35.3	37.7	
1575		S/T	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.60	1.00	1.00	0.84	0.63	1.00	1.00	0.84	0.63	
		Δ T	22	21	19	15	22	22	19	15	22	22	19	15	21	22	19	15	20	21	19	15	19	19	17	14	
		kW	2.66	2.70	2.77	2.84	2.81	2.86	2.93	3.01	2.95	3.00	3.08	3.16	3.08	3.13	3.21	3.30	3.18	3.24	3.32	3.42	3.27	3.33	3.42	3.52	
85		1225	Amps	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.4	11.8	11.4	11.6	12.0	12.5
			HI PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495
			LO PR	118	126	137	146	125	133	145	155	130	138	151	161	137	145	159	169	143	152	166	177	148	157	172	183
	1400	MBh	36.0	36.7	38.4	41.0	35.2	35.9	37.6	40.1	34.3	35.0	36.7	39.1	33.5	34.1	35.8	38.2	31.8	32.4	34.0	36.2	29.5	30.0	31.5	33.6	
		S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	
		Δ T	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	21	24	24	23	20	22	23	22	19	
	1575	kW	2.61	2.65	2.71	2.78	2.76	2.81	2.88	2.95	2.90	2.95	3.02	3.10	3.01	3.07	3.15	3.23	3.12	3.17	3.26	3.35	3.20	3.26	3.35	3.44	
		Amps	7.9	8.1	8.4	8.7	8.5	8.7	9.0	9.3	9.3	9.5	9.8	10.1	9.9	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.3	11.7	12.1	
		HI PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480	
	85	1225	LO PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	154	164	139	148	161	172	144	153	167	178
			MBh	39.0	39.8	41.7	44.4	38.1	38.8	40.7	43.4	37.2	37.9	39.7	42.4	36.3	37.0	38.7	41.3	34.5	35.1	36.8	39.3	31.9	32.6	34.1	36.4
			S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78
1400		Δ T	25	24	23	20	25	25	23	20	24	25	23	20	24	24	23	20	23	23	23	20	21	21	22	19	
		kW	2.66	2.70	2.77	2.84	2.81	2.86	2.93	3.01	2.95	3.00	3.08	3.16	3.08	3.13	3.21	3.30	3.18	3.24	3.32	3.42	3.27	3.33	3.42	3.52	
		Amps	8.2	8.3	8.6	8.9	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.1	10.4	10.7	11.1	10.7	11.0	11.4	11.8	11.4	11.6	12.0	12.5	
1575		HI PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495	
		LO PR	118	126	137	146	125	133	145	155	130	138	151	161	137	145	159	169	143	152	166	177	148	157	172	183	
		MBh	40.2	41.0	42.9	45.8	39.2	40.0	41.9	44.7	38.3	39.1	40.9	43.6	37.4	38.1	39.9	42.6	35.5	36.2	37.9	40.4	32.9	33.5	35.1	37.5	
1575		S/T	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.78	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.82	
		Δ T	23	23	22	19	23	23	22	19	22	23	22	19	22	22	22	19	21	21	22	19	19	20	20	18	
		kW	2.67	2.72	2.78	2.85	2.83	2.88	2.95	3.03	2.97	3.02	3.10	3.19	3.10	3.15	3.24	3.32	3.20	3.26	3.35	3.44	3.29	3.35	3.44	3.54	
1575	Amps	8.2	8.4	8.7	9.0	8.9	9.1	9.3	9.7	9.6	9.8	10.1	10.5	10.2	10.5	10.8	11.2	10.8	11.1	11.5	11.9	11.5	11.7	12.1	12.6		
	HI PR	233	251	265	277	262	282	298	310	298	321	339	353	339	365	386	402	382	411	434	452	422	454	479	500		
	LO PR	120	127	139	148	126	134	147	156	131	140	152	162	138	147	160	171	145	154	168	179	149	159	174	185		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — S5X160421A\* / CA\*F4860\*6B\* +TXV/MBVC2000\*\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	34.6	35.9	39.3	-	33.8	35.1	38.4	-	33.0	34.2	37.5	-	32.2	33.4	36.6	-	30.6	31.7	34.8	-	28.4	29.4	32.2	-	
		S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.47	-	0.83	0.69	0.48	-	
	1400	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	
		kW	2.28	2.32	2.39	-	2.44	2.49	2.56	-	2.58	2.64	2.72	-	2.71	2.77	2.85	-	2.82	2.88	2.97	-	2.91	2.97	3.07	-	
	1575	Amps	8.7	8.9	9.1	-	9.3	9.6	9.9	-	10.1	10.4	10.7	-	10.8	11.1	11.5	-	11.5	11.8	12.2	-	12.2	12.5	12.9	-	
		Hi PR	218	234	247	-	244	263	277	-	278	299	315	-	316	340	359	-	356	383	404	-	393	423	447	-	
	75	1225	Lo PR	111	119	129	-	118	125	137	-	122	130	142	-	128	137	149	-	135	143	156	-	139	148	162	-
			MBh	37.5	38.9	42.6	-	36.6	38.0	41.6	-	35.8	37.1	40.6	-	34.9	36.2	39.6	-	33.2	34.4	37.7	-	30.7	31.8	34.9	-
		1400	S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-
			ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
		1575	kW	2.33	2.37	2.44	-	2.50	2.55	2.62	-	2.64	2.70	2.78	-	2.78	2.83	2.92	-	2.89	2.95	3.04	-	2.98	3.05	3.14	-
			Amps	8.9	9.1	9.4	-	9.6	9.8	10.2	-	10.4	10.7	11.0	-	11.1	11.4	11.8	-	11.8	12.1	12.5	-	12.5	12.8	13.3	-
75		1225	Hi PR	224	241	255	-	252	271	286	-	286	308	325	-	326	351	370	-	367	395	417	-	405	436	460	-
			Lo PR	115	122	133	-	121	129	141	-	126	134	146	-	132	141	154	-	139	148	161	-	144	153	167	-
		1400	MBh	38.6	40.1	43.9	-	37.7	39.1	42.9	-	36.9	38.2	41.8	-	36.0	37.3	40.8	-	34.2	35.4	38.8	-	31.6	32.8	35.9	-
			S/T	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.89	0.74	0.52	-	0.90	0.75	0.52	-
		1575	ΔT	18	15	12	-	18	15	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
			kW	2.34	2.39	2.46	-	2.51	2.57	2.64	-	2.66	2.72	2.80	-	2.80	2.86	2.95	-	2.91	2.97	3.07	-	3.01	3.07	3.17	-
	75	1225	Amps	9.0	9.2	9.5	-	9.7	9.9	10.2	-	10.5	10.8	11.1	-	11.2	11.5	11.9	-	12.0	12.2	12.6	-	12.7	13.0	13.4	-
			Hi PR	227	244	257	-	254	274	289	-	289	311	328	-	329	354	374	-	370	399	421	-	409	440	465	-
		1400	Lo PR	116	123	135	-	123	130	142	-	127	136	148	-	134	142	155	-	140	149	163	-	145	154	168	-
			MBh	35.2	36.3	39.3	42.1	34.4	35.4	38.3	41.1	33.6	34.6	37.4	40.2	32.8	33.7	36.5	39.2	31.1	32.0	34.7	37.2	28.8	29.7	32.1	34.5
		1575	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41
			ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
75		1225	kW	2.29	2.34	2.41	2.48	2.46	2.51	2.58	2.66	2.60	2.66	2.74	2.82	2.73	2.79	2.88	2.97	2.84	2.90	2.99	3.09	2.93	3.00	3.09	3.19
			Amps	8.7	8.9	9.2	9.6	9.4	9.7	10.0	10.3	10.2	10.5	10.8	11.2	10.9	11.2	11.6	12.0	11.6	11.9	12.3	12.8	12.3	12.6	13.0	13.5
		1400	Hi PR	220	237	250	260	247	265	280	292	280	302	319	332	319	344	363	379	359	387	408	426	397	427	451	471
			Lo PR	113	120	131	139	119	127	138	147	124	131	144	153	130	138	151	161	136	145	158	168	141	150	163	174
		1575	MBh	38.2	39.3	42.5	45.6	37.3	38.4	41.5	44.6	36.4	37.5	40.5	43.5	35.5	36.5	39.6	42.5	33.7	34.7	37.6	40.3	31.2	32.2	34.8	37.4
			S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.98	0.87	0.66	0.42
	75	1225	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	18	15	10
			kW	2.35	2.39	2.46	2.54	2.52	2.57	2.64	2.73	2.67	2.72	2.80	2.89	2.80	2.86	2.95	3.04	2.91	2.97	3.07	3.17	3.01	3.07	3.17	3.27
		1400	Amps	9.0	9.2	9.5	9.8	9.7	9.9	10.2	10.6	10.5	10.8	11.1	11.5	11.2	11.5	11.9	12.3	12.0	12.2	12.7	13.1	12.7	13.0	13.4	13.9
			Hi PR	227	244	257	269	254	274	289	301	289	311	329	343	329	354	374	390	370	399	421	439	409	441	465	485
		1575	Lo PR	116	123	135	144	123	130	142	152	127	136	148	158	134	142	155	166	140	149	163	173	145	154	168	179
			MBh	39.3	40.5	43.8	47.0	38.4	39.5	42.8	45.9	37.5	38.6	41.8	44.8	36.6	37.6	40.7	43.7	34.7	35.8	38.7	41.5	32.2	33.1	35.9	38.5
75		1225	S/T	0.89	0.80	0.60	0.39	0.92	0.83	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.87	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.91	0.69	0.45
			ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	16	11	19	18	14	10
		1400	kW	2.36	2.41	2.48	2.56	2.53	2.59	2.67	2.75	2.69	2.74	2.83	2.92	2.82	2.88	2.97	3.06	2.93	3.00	3.09	3.19	3.03	3.10	3.20	3.30
			Amps	9.1	9.3	9.6	9.9	9.8	10.0	10.3	10.7	10.6	10.9	11.2	11.6	11.3	11.6	12.0	12.4	12.1	12.4	12.8	13.3	12.8	13.1	13.5	14.0
		1575	Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	443	413	445	470	490
			Lo PR	117	125	136	145	124	132	144	153	129	137	149	159	135	144	157	167	142	151	165	175	147	156	170	181

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)



EXPANDED COOLING DATA — SSX160421A\* / CA\*F4860\*6B\* +TXV/MBVC2000\*\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1225	MBh	35.8	36.6	39.1	41.8	35.0	35.8	38.2	40.9	34.2	34.9	37.3	39.9	33.3	34.1	36.4	38.9	31.7	32.4	34.6	37.0	29.3	30.0	32.0	34.2	
		S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.95	0.90	0.73	0.54	0.99	0.92	0.75	0.56	1.02	0.96	0.78	0.58	1.03	0.97	0.79	0.59	
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	21	16	25	24	21	16	23	22	19	15	
	1400	kW	2.31	2.36	2.43	2.50	2.48	2.53	2.60	2.68	2.62	2.68	2.76	2.85	2.75	2.81	2.90	2.99	2.86	2.92	3.02	3.11	2.96	3.02	3.12	3.22	
		Amps	8.8	9.0	9.3	9.7	9.5	9.7	10.1	10.4	10.3	10.6	10.9	11.3	11.0	11.3	11.7	12.1	11.7	12.0	12.4	12.9	12.4	12.7	13.2	13.7	
		Hi PR	222	239	252	263	249	268	283	295	283	305	322	336	323	347	367	382	363	391	412	430	401	432	456	475	
	1575	Lo PR	114	121	132	141	120	128	139	149	125	133	145	154	131	139	152	162	137	146	160	170	142	151	165	176	
		MBh	38.8	39.7	42.4	45.3	37.9	38.8	41.4	44.3	37.0	37.8	40.4	43.2	36.1	36.9	39.4	42.2	34.3	35.1	37.5	40.1	31.8	32.5	34.7	37.1	
		S/T	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.99	0.81	0.61	1.00	1.00	0.82	0.61	
	80	1400	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	21	21	19	15
			kW	2.36	2.41	2.48	2.56	2.53	2.59	2.67	2.75	2.69	2.74	2.83	2.92	2.82	2.88	2.97	3.07	2.93	3.00	3.09	3.19	3.03	3.10	3.20	3.30
			Amps	9.1	9.3	9.6	9.9	9.8	10.0	10.3	10.7	10.6	10.9	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.1	13.5	14.0
1575		Hi PR	229	246	260	271	257	276	292	304	292	314	332	346	333	358	378	394	374	403	425	444	413	445	470	490	
		Lo PR	117	125	136	145	124	132	144	153	129	137	149	159	135	144	157	167	142	151	165	175	147	156	170	181	
		MBh	40.0	40.9	43.7	46.7	39.1	39.9	42.7	45.6	38.1	39.0	41.6	44.5	37.2	38.0	40.6	43.4	35.4	36.1	38.6	41.3	32.7	33.5	35.7	38.2	
80		1575	S/T	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.63	1.00	1.00	0.86	0.64
			ΔT	23	22	19	15	23	22	19	15	22	23	19	15	22	22	19	15	21	21	19	15	19	20	18	14
			kW	2.38	2.43	2.50	2.58	2.55	2.61	2.69	2.77	2.71	2.76	2.85	2.94	2.84	2.90	2.99	3.09	2.96	3.02	3.12	3.22	3.06	3.12	3.22	3.33
		1575	Amps	9.1	9.4	9.7	10.0	9.9	10.1	10.4	10.8	10.7	11.0	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.2	13.7	14.2
			Hi PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495
			Lo PR	118	126	137	146	125	133	145	155	130	138	151	161	137	145	159	169	143	152	166	177	148	157	172	183

85	1225	MBh	36.5	37.2	38.9	41.5	35.6	36.3	38.0	40.6	34.8	35.4	37.1	39.6	33.9	34.6	36.2	38.6	32.2	32.9	34.4	36.7	29.9	30.4	31.9	34.0	
		S/T	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	
		ΔT	26	25	24	21	26	26	24	21	26	26	24	21	25	26	24	21	24	25	24	21	22	23	23	19	
	1400	kW	2.33	2.37	2.44	2.52	2.50	2.55	2.62	2.70	2.64	2.70	2.78	2.87	2.77	2.83	2.92	3.01	2.89	2.95	3.04	3.14	2.98	3.05	3.14	3.25	
		Amps	8.9	9.1	9.4	9.7	9.6	9.8	10.1	10.5	10.4	10.7	11.0	11.4	11.1	11.4	11.8	12.2	11.8	12.1	12.5	13.0	12.5	12.8	13.3	13.8	
		Hi PR	224	241	255	266	252	271	286	298	286	308	325	339	326	351	370	386	367	395	417	435	405	436	460	480	
	1575	Lo PR	115	122	133	142	121	129	141	150	126	134	146	156	132	141	154	164	139	148	161	172	144	153	167	178	
		MBh	39.5	40.3	42.2	45.0	38.6	39.3	41.2	44.0	37.7	38.4	40.2	42.9	36.8	37.5	39.2	41.9	34.9	35.6	37.3	39.8	32.3	33.0	34.5	36.8	
		S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79	
	85	1400	ΔT	25	25	24	20	25	25	24	21	25	25	24	21	24	25	24	21	23	23	24	21	21	21	22	19
			kW	2.38	2.43	2.50	2.58	2.55	2.61	2.69	2.77	2.71	2.76	2.85	2.94	2.84	2.90	2.99	3.09	2.96	3.02	3.12	3.22	3.06	3.12	3.22	3.33
			Amps	9.1	9.4	9.7	10.0	9.9	10.1	10.4	10.8	10.7	11.0	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.2	13.7	14.2
1575		Hi PR	231	249	263	274	259	279	295	307	295	317	335	350	336	362	382	398	378	407	430	448	418	449	475	495	
		Lo PR	118	126	137	146	125	133	145	155	130	138	151	161	137	145	159	169	143	152	166	177	148	157	172	183	
		MBh	40.7	41.5	43.5	46.4	39.8	40.5	42.4	45.3	38.8	39.6	41.4	44.2	37.9	38.6	40.4	43.1	36.0	36.7	38.4	41.0	33.3	34.0	35.6	37.9	
1575		S/T	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.83	
		ΔT	24	24	23	20	23	24	23	20	23	23	23	20	22	23	23	20	21	21	22	20	19	20	21	18	
		kW	2.40	2.45	2.52	2.60	2.57	2.63	2.71	2.79	2.73	2.79	2.87	2.96	2.86	2.93	3.02	3.11	2.98	3.04	3.14	3.24	3.08	3.15	3.25	3.35	
1575		Amps	9.2	9.4	9.7	10.1	10.0	10.2	10.5	10.9	10.8	11.1	11.4	11.9	11.5	11.8	12.2	12.7	12.3	12.6	13.0	13.5	13.0	13.3	13.8	14.3	
		Hi PR	233	251	265	277	262	282	298	310	298	321	339	353	339	365	386	402	382	411	434	452	422	454	479	500	
		Lo PR	120	127	139	148	126	134	147	156	131	140	152	162	138	147	160	171	145	154	168	179	149	159	174	185	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)



EXPANDED COOLING DATA — SSX160481B\* / CA\*F4860\*6D\*+TXV

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-
	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.66	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
	kW	2.99	3.05	3.14	-	3.20	3.27	3.37	-	3.39	3.46	3.56	-	3.56	3.63	3.74	-	3.70	3.77	3.89	-	3.82	3.90	4.02	-
	Amps	10.9	11.2	11.6	-	11.9	12.2	12.7	-	13.0	13.4	13.9	-	14.0	14.4	14.9	-	15.0	15.4	16.0	-	16.0	16.4	17.0	-
	Hi PR	222	239	252	-	249	268	283	-	283	305	322	-	322	347	366	-	363	390	412	-	401	431	455	-
	Lo PR	108	115	125	-	114	121	132	-	118	126	138	-	124	132	145	-	130	139	151	-	135	143	157	-
	MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-
	S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
	kW	2.97	3.03	3.12	-	3.18	3.24	3.34	-	3.37	3.43	3.54	-	3.53	3.60	3.71	-	3.67	3.74	3.86	-	3.79	3.87	3.99	-
	Amps	10.8	11.1	11.5	-	11.8	12.1	12.5	-	12.9	13.2	13.7	-	13.9	14.2	14.8	-	14.8	15.2	15.8	-	15.8	16.2	16.8	-
Hi PR	220	236	249	-	246	265	280	-	280	301	318	-	319	343	363	-	359	386	408	-	397	427	451	-	
Lo PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	
MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	
S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-	
ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	
kW	2.91	2.96	3.05	-	3.11	3.17	3.26	-	3.29	3.36	3.46	-	3.45	3.52	3.62	-	3.58	3.66	3.77	-	3.70	3.77	3.89	-	
Amps	10.5	10.8	11.2	-	11.4	11.7	12.2	-	12.5	12.9	13.3	-	13.5	13.8	14.3	-	14.4	14.8	15.3	-	15.3	15.7	16.3	-	
Hi PR	213	229	242	-	239	257	272	-	272	292	309	-	310	333	352	-	348	375	396	-	385	414	437	-	
Lo PR	104	110	120	-	109	116	127	-	114	121	132	-	119	127	139	-	125	133	145	-	130	138	150	-	

75	MBh	45.84	47.20	51.09	54.83	44.77	46.10	49.90	53.55	43.71	45.00	48.71	52.28	42.64	43.90	47.52	51.00	40.51	41.71	45.15	48.45	37.52	38.64	41.82	44.88
	S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.87	0.66	0.43
	ΔT	21	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
	kW	3.02	3.07	3.16	3.26	3.23	3.29	3.39	3.49	3.42	3.49	3.59	3.70	3.58	3.66	3.77	3.89	3.72	3.80	3.92	4.04	3.85	3.93	4.05	4.18
	Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.8	13.3	13.2	13.5	14.0	14.6	14.2	14.5	15.1	15.7	15.1	15.6	16.1	16.8	16.1	16.6	17.2	17.9
	Hi PR	224	241	255	265	251	270	286	298	286	308	325	339	326	350	370	386	366	394	416	434	405	435	460	480
	Lo PR	109	116	127	135	115	122	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169
	MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.63	0.40	0.93	0.83	0.63	0.41
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	10
	kW	2.99	3.05	3.14	3.23	3.21	3.27	3.37	3.47	3.39	3.46	3.56	3.67	3.56	3.63	3.74	3.86	3.70	3.77	3.89	4.01	3.82	3.90	4.02	4.15
	Amps	10.9	11.2	11.6	12.1	11.9	12.2	12.7	13.2	13.0	13.4	13.9	14.4	14.0	14.4	14.9	15.5	15.0	15.4	16.0	16.6	16.0	16.4	17.0	17.7
Hi PR	222	239	252	263	249	268	283	295	283	305	322	335	322	347	366	382	363	390	412	430	401	431	455	475	
Lo PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	144	157	167	
MBh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.3	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2	
S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39	
ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	16	11	
kW	2.93	2.99	3.07	3.16	3.13	3.20	3.29	3.39	3.31	3.38	3.48	3.59	3.47	3.54	3.65	3.77	3.61	3.68	3.80	3.92	3.73	3.80	3.92	4.05	
Amps	10.6	10.9	11.3	11.7	11.5	11.9	12.3	12.8	12.6	13.0	13.5	14.0	13.6	14.0	14.5	15.1	14.5	14.9	15.5	16.1	15.5	15.9	16.5	17.2	
Hi PR	215	231	244	255	241	260	274	286	275	295	312	325	313	336	355	371	352	379	400	417	389	418	442	461	
Lo PR	105	111	122	129	111	118	128	137	115	122	133	142	121	128	140	149	127	135	147	156	131	139	152	162	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSX160481B\* / CA\*F4860\*6D\* +TXV (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
<b>80</b>	1750	MBh	46.66	47.67	50.93	54.45	45.57	46.57	49.75	53.18	44.49	45.46	48.56	51.92	43.40	44.35	47.38	50.65	41.23	42.13	45.01	48.12	38.19	39.03	41.69	44.57	
		S/T	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61	
		ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	16	22	21	19	15	20	21	18	14	
	1550	kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21	
		Amps	11.1	11.4	11.9	12.3	12.1	12.5	12.9	13.4	13.3	13.7	14.1	14.7	14.3	14.7	15.2	15.8	15.3	15.7	16.3	16.9	16.3	16.7	17.3	18.0	
		Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	465	484	
	1350	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170	
		MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3	
		S/T	0.89	0.84	0.68	0.51	0.92	0.87	0.70	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58	
	<b>85</b>	1750	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	22	19	15
			kW	3.02	3.07	3.16	3.26	3.23	3.29	3.39	3.49	3.42	3.49	3.59	3.70	3.58	3.66	3.77	3.89	3.73	3.80	3.92	4.04	3.85	3.93	4.05	4.18
			Amps	11.0	11.3	11.7	12.2	12.0	12.3	12.8	13.3	13.2	13.5	14.0	14.6	14.2	14.5	15.1	15.7	15.2	15.6	16.1	16.8	16.1	16.6	17.2	17.9
1550		Hi PR	224	241	255	266	251	271	286	298	286	308	325	339	326	350	370	386	366	394	416	434	405	436	460	480	
		Lo PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	155	132	140	153	163	136	145	158	169	
		MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9	
1350		S/T	0.86	0.81	0.66	0.49	0.89	0.83	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.92	0.75	0.56	
		ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	25	24	21	16	23	22	19	15	
		kW	2.95	3.01	3.09	3.18	3.16	3.22	3.31	3.41	3.34	3.41	3.51	3.62	3.50	3.57	3.68	3.80	3.64	3.71	3.83	3.95	3.76	3.83	3.95	4.08	
<b>88</b>		1750	Amps	10.7	11.0	11.4	11.8	11.7	12.0	12.4	12.9	12.8	13.1	13.6	14.1	13.7	14.1	14.6	15.2	14.7	15.1	15.6	16.3	15.6	16.1	16.6	17.3
			Hi PR	217	234	247	258	244	262	277	289	277	298	315	329	316	340	359	374	355	382	404	421	393	422	446	465
			Lo PR	106	112	123	131	112	119	130	138	116	123	135	144	122	130	142	151	128	136	148	158	132	141	154	163
	1550	MBh	47.47	48.39	50.68	54.07	46.37	47.26	49.50	52.81	45.26	46.14	48.32	51.55	44.16	45.01	47.14	50.29	41.95	42.76	44.79	47.78	38.86	39.61	41.49	44.26	
		S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79	
		ΔT	24	24	23	20	24	24	23	20	24	24	23	20	23	24	23	20	22	22	23	20	20	21	21	18	
	1350	kW	3.06	3.12	3.21	3.31	3.28	3.34	3.44	3.55	3.47	3.54	3.65	3.76	3.64	3.71	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25	
		Amps	11.3	11.6	12.0	12.5	12.3	12.6	13.0	13.6	13.4	13.8	14.3	14.9	14.4	14.8	15.4	16.0	15.5	15.9	16.4	17.1	16.5	16.9	17.5	18.2	
		Hi PR	229	246	260	271	256	276	291	304	292	314	331	346	332	357	377	394	374	402	425	443	413	444	469	489	
	<b>85</b>	1750	Lo PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172
			MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0
			S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.93	0.75	1.00	1.00	0.93	0.76
1550		ΔT	26	25	24	21	26	25	24	21	26	25	24	21	25	26	24	21	24	25	24	21	22	23	22	19	
		kW	3.04	3.10	3.19	3.28	3.25	3.32	3.42	3.52	3.44	3.51	3.62	3.73	3.61	3.69	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21	
		Amps	11.1	11.4	11.9	12.3	12.1	12.5	12.9	13.4	13.3	13.7	14.1	14.7	14.3	14.7	15.2	15.8	15.3	15.7	16.3	16.9	16.3	16.7	17.3	18.0	
1350		Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	465	484	
		Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170	
		MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7	
1350		S/T	0.90	0.87	0.78	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.90	0.73	
		ΔT	26	26	24	21	26	26	25	21	26	26	25	21	27	26	25	21	26	26	24	21	24	24	23	20	
		kW	2.97	3.03	3.12	3.21	3.18	3.24	3.34	3.44	3.36	3.43	3.54	3.65	3.53	3.60	3.71	3.83	3.67	3.74	3.86	3.98	3.79	3.86	3.99	4.11	
1350	Amps	10.8	11.1	11.5	12.0	11.8	12.1	12.5	13.0	12.9	13.2	13.7	14.3	13.9	14.2	14.8	15.4	14.8	15.2	15.8	16.4	15.8	16.2	16.8	17.5		
	Hi PR	219	236	249	260	246	265	280	292	280	301	318	332	319	343	362	378	359	386	408	425	397	427	451	470		
	Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	133	142	155	165		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV + EEP

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1350	MBh	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.5	52.3	57.3	-	49.3	51.1	56.0	-	46.8	48.5	53.2	-	43.4	44.9	49.2	-	
		S/T	0.64	0.53	0.37	-	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.73	0.61	0.42	-	0.73	0.61	0.42	-	
		ΔT	23	20	15	-	23	20	15	-	23	20	15	-	23	20	15	-	23	20	15	-	22	19	14	-	
	1500	kW	3.46	3.53	3.63	-	3.71	3.79	3.91	-	3.94	4.02	4.15	-	4.14	4.23	4.36	-	4.31	4.40	4.55	-	4.46	4.55	4.70	-	
		Amps	13.2	13.5	14.0	-	14.3	14.6	15.1	-	15.5	15.9	16.4	-	16.6	17.0	17.6	-	17.6	18.1	18.7	-	18.7	19.2	19.8	-	
		Hi PR	222	239	252	-	249	268	283	-	283	304	321	-	322	347	366	-	362	390	412	-	400	431	455	-	
	1700	Lo PR	115	122	134	-	122	129	141	-	126	134	147	-	133	141	154	-	139	148	162	-	144	153	167	-	
		MBh	53.8	55.7	61.1	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.3	54.0	-	44.0	45.6	50.0	-	
		S/T	0.66	0.55	0.38	-	0.69	0.57	0.40	-	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.76	0.63	0.44	-	
	75	1350	ΔT	22	19	14	-	22	19	14	-	22	19	15	-	22	19	15	-	22	19	14	-	20	18	13	-
			kW	3.50	3.57	3.68	-	3.76	3.84	3.96	-	3.99	4.08	4.21	-	4.20	4.29	4.43	-	4.37	4.47	4.61	-	4.52	4.62	4.77	-
			Amps	13.4	13.7	14.2	-	14.5	14.8	15.3	-	15.7	16.1	16.7	-	16.8	17.3	17.8	-	17.9	18.4	19.0	-	19.0	19.5	20.1	-
1500		Hi PR	225	243	256	-	253	272	287	-	288	310	327	-	328	353	372	-	369	397	419	-	407	438	463	-	
		Lo PR	117	125	136	-	124	132	144	-	129	137	149	-	135	144	157	-	141	151	164	-	146	156	170	-	
		MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	60.0	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-	
1700		S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-	
		kW	3.53	3.60	3.71	-	3.79	3.87	3.99	-	4.03	4.11	4.24	-	4.23	4.32	4.46	-	4.41	4.50	4.65	-	4.56	4.66	4.81	-	
75		1350	Amps	13.5	13.8	14.3	-	14.6	15.0	15.5	-	15.9	16.3	16.8	-	17.0	17.4	18.0	-	18.1	18.5	19.2	-	19.2	19.7	20.3	-
			Hi PR	228	245	259	-	256	275	290	-	291	313	330	-	331	356	376	-	372	401	423	-	411	443	468	-
			Lo PR	118	126	137	-	125	133	145	-	130	138	151	-	136	145	158	-	143	152	166	-	148	157	172	-
	1500	MBh	53.9	55.5	60.0	64.4	52.6	54.2	58.6	62.9	51.4	52.9	57.2	61.4	50.1	51.6	55.8	59.9	47.6	49.0	53.0	56.9	44.1	45.4	49.1	52.7	
		S/T	0.72	0.65	0.49	0.32	0.75	0.67	0.51	0.33	0.77	0.69	0.52	0.34	0.79	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.83	0.74	0.56	0.36	
		ΔT	27	24	20	14	27	25	20	14	27	25	20	14	27	25	20	14	27	25	20	14	25	23	19	13	
	1700	kW	3.48	3.55	3.66	3.78	3.74	3.82	3.94	4.07	3.97	4.06	4.18	4.32	4.17	4.26	4.40	4.54	4.35	4.44	4.58	4.74	4.49	4.59	4.74	4.90	
		Amps	13.3	13.6	14.1	14.6	14.4	14.7	15.2	15.8	15.6	16.0	16.6	17.2	16.7	17.1	17.7	18.4	17.8	18.3	18.9	19.6	18.9	19.3	20.0	20.8	
		Hi PR	224	241	254	265	251	270	285	298	286	307	325	339	325	350	370	386	366	394	416	434	405	435	460	479	
	75	1350	Lo PR	116	124	135	144	123	131	143	152	128	136	148	158	134	143	156	166	140	149	163	174	145	155	169	180
			MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.4	50.9	52.4	56.7	60.8	48.3	49.8	53.9	57.8	44.8	46.1	49.9	53.5
			S/T	0.75	0.67	0.51	0.33	0.78	0.70	0.53	0.34	0.80	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.86	0.77	0.58	0.38
1500		ΔT	25	23	19	13	25	23	19	13	26	23	19	13	26	24	19	13	25	23	19	13	24	22	18	12	
		kW	3.53	3.60	3.71	3.83	3.79	3.87	3.99	4.12	4.03	4.11	4.24	4.38	4.23	4.32	4.46	4.61	4.41	4.50	4.65	4.80	4.56	4.66	4.81	4.97	
		Amps	13.5	13.8	14.3	14.8	14.6	15.0	15.5	16.1	15.9	16.3	16.8	17.5	17.0	17.4	18.0	18.7	18.1	18.5	19.2	19.9	19.2	19.7	20.3	21.1	
1700		Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488	
		Lo PR	118	126	137	146	125	133	145	155	130	138	151	161	136	145	158	169	143	152	166	177	148	157	172	183	
		MBh	56.3	58.0	62.8	67.4	55.0	56.6	61.3	65.8	53.7	55.3	59.9	64.2	52.4	53.9	58.4	62.7	49.8	51.2	55.5	59.5	46.1	47.5	51.4	55.1	
1700		S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	
		ΔT	24	22	18	13	24	22	18	13	24	22	18	13	24	23	18	13	24	22	18	13	23	21	17	12	
		kW	3.56	3.63	3.74	3.86	3.82	3.90	4.03	4.16	4.06	4.15	4.28	4.42	4.27	4.36	4.50	4.65	4.44	4.54	4.69	4.84	4.60	4.70	4.85	5.01	
1700	Amps	13.6	14.0	14.4	15.0	14.8	15.1	15.6	16.2	16.0	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.4	20.1	19.4	19.8	20.5	21.3		
	Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	427	446	416	447	472	493		
	Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV + EEP (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
		65°F				75°F				85°F				95°F				105°F				115°F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
80	1350	MBh	54.8	56.0	59.8	64.0	53.5	54.7	58.5	62.5	52.3	53.4	57.1	61.0	51.0	52.1	55.7	59.5	48.4	49.5	52.9	56.5	44.9	45.9	49.0	52.4	S/T	0.79	0.75	0.61	0.45	0.82	0.77	0.63	0.47	0.84	0.79	0.64	0.48	0.87	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.91	0.86	0.70	0.52	ΔT	30	28	25	20	30	29	25	20	30	29	25	20	30	27	23	19	kW	3.51	3.58	3.69	3.81	3.77	3.85	3.97	4.10	4.00	4.09	4.22	4.36	4.21	4.30	4.44	4.58	4.38	4.48	4.62	4.78	4.53	4.63	4.78	4.94	Amps	13.4	13.8	14.2	14.7	14.5	14.9	15.4	16.0	15.8	16.2	16.7	17.4	16.9	17.3	17.9	18.6	18.0	18.4	19.0	19.8	19.1	19.5	20.2	21.0	Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	464	484	Lo PR	117	125	136	145	124	132	144	153	129	137	150	159	135	144	157	168	142	151	165	176	147	156	170	182	MBh	55.7	56.9	60.8	65.0	54.4	55.5	59.3	63.4	53.1	54.2	57.9	61.9	51.8	52.9	56.5	60.4	49.2	50.3	53.7	57.4	45.6	46.6	49.7	53.2	S/T	0.82	0.77	0.63	0.47	0.85	0.80	0.65	0.49	0.88	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.95	0.89	0.72	0.54	ΔT	28	27	23	19	28	27	24	19	29	27	24	19	29	27	24	19	26	25	22	18	kW	3.56	3.63	3.74	3.86	3.82	3.90	4.03	4.16	4.06	4.15	4.28	4.42	4.27	4.36	4.50	4.65	4.44	4.54	4.69	4.84	4.60	4.70	4.85	5.01	Amps	13.6	14.0	14.4	15.0	14.8	15.1	15.6	16.2	16.0	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.4	20.1	19.4	19.8	20.5	21.3	Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	428	446	416	447	472	493	Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185	MBh	57.3	58.6	62.6	66.9	56.0	57.2	61.1	65.3	54.7	55.9	59.7	63.8	53.3	54.5	58.2	62.2	50.7	51.8	55.3	59.1	46.9	48.0	51.2	54.8	S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.93	0.76	0.57	ΔT	27	26	22	18	27	26	23	18	27	26	23	18	27	26	23	18	25	24	21	17	kW	3.58	3.66	3.77	3.89	3.85	3.93	4.06	4.19	4.09	4.18	4.31	4.45	4.30	4.39	4.54	4.69	4.48	4.58	4.73	4.88	4.63	4.74	4.89	5.06	Amps	13.8	14.1	14.6	15.1	14.9	15.3	15.8	16.4	16.2	16.6	17.1	17.8	17.3	17.7	18.3	19.0	18.4	18.9	19.5	20.3	19.5	20.0	20.7	21.5	Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498	Lo PR	121	128	140	149	127	136	148	158	132	141	154	164	139	148	162	172	146	155	169	180	151	160	175	187	55.8	56.9	59.5	63.5	54.5	55.5	58.2	62.1	53.2	54.2	56.8	60.6	51.9	52.9	55.4	59.1	49.3	50.2	52.6	56.1	45.7	46.5	48.7	52.0	S/T	0.83	0.80	0.73	0.59	0.86	0.83	0.75	0.61	0.89	0.85	0.77	0.63	0.91	0.88	0.80	0.65	0.95	0.92	0.83	0.67	0.96	0.92	0.83	0.68	ΔT	32	31	29	25	32	30	26	22	32	30	26	22	32	30	26	22	30	29	26	24	3.54	3.61	3.72	3.84	3.80	3.88	4.00	4.13	4.04	4.12	4.25	4.39	4.24	4.33	4.47	4.62	4.42	4.51	4.66	4.82	4.57	4.67	4.82	4.98	13.6	13.9	14.3	14.9	14.7	15.0	15.5	16.1	15.9	16.3	16.9	17.5	17.0	17.5	18.0	18.7	18.1	18.6	19.2	20.0	19.2	19.7	20.4	21.2	228	246	260	271	256	276	291	304	291	314	331	345	332	357	377	393	374	402	424	443	413	444	469	489	119	126	138	147	125	133	146	155	130	139	151	161	137	146	159	169	143	152	166	177	148	158	172	183	56.6	57.7	60.5	64.5	55.3	56.4	59.0	63.0	54.0	55.0	57.6	61.5	52.7	53.7	56.2	60.0	50.0	51.0	53.4	57.0	46.4	47.3	49.5	52.8	S/T	0.86	0.83	0.75	0.61	0.90	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.83	0.67	0.98	0.95	0.86	0.69	0.99	0.96	0.86	0.69	ΔT	30	29	28	24	30	30	28	24	30	30	28	24	31	30	28	25	30	30	28	24	28	28	26	23	3.58	3.66	3.77	3.89	3.85	3.93	4.06	4.19	4.09	4.18	4.31	4.45	4.30	4.39	4.54	4.69	4.48	4.58	4.73	4.88	4.63	4.74	4.89	5.06	13.8	14.1	14.6	15.1	14.9	15.3	15.8	16.4	16.2	16.6	17.1	17.8	17.3	17.7	18.3	19.0	18.4	18.9	19.5	20.3	19.5	20.0	20.7	21.5	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498	121	128	140	149	127	136	148	158	132	141	154	164	139	148	162	172	146	155	169	180	151	160	175	187	58.3	59.5	62.3	66.4	57.0	58.1	60.8	64.9	55.6	56.7	59.4	63.3	54.3	55.3	57.9	61.8	51.5	52.5	55.0	58.7	47.7	48.7	51.0	54.4	S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.73	ΔT	29	28	27	23	29	28	27	23	29	29	27	23	29	29	27	23	28	28	27	23	26	26	25	22	3.61	3.69	3.80	3.92	3.88	3.97	4.09	4.22	4.12	4.21	4.35	4.49	4.34	4.43	4.57	4.73	4.52	4.62	4.77	4.93	4.67	4.78	4.93	5.10	13.9	14.2	14.7	15.3	15.0	15.4	15.9	16.5	16.3	16.7	17.3	18.0	17.5	17.9	18.5	19.2	18.6	19.1	19.7	20.5	19.7	20.2	20.9	21.7	235	253	267	278	263	283	299	312	300	322	340	355	341	367	388	404	384	413	436	455	424	456	482	503	122	130	142	151	129	137	150	159	134	142	155	165	141	150	163	174	147	157	171	182	152	162	177	188

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV/MBVC2000\*\*

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1350	MBh	54.6	56.6	62.1	-	53.4	55.3	60.6	-	52.1	54.0	59.2	-	50.8	52.7	57.7	-	48.3	50.1	54.8	-	44.7	46.4	50.8	-	
		S/T	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.75	0.63	0.44	-	
		ΔT	24	21	16	-	25	21	16	-	25	21	16	-	25	22	16	-	25	20	16	-	23	20	15	-	
	1500	kW	3.26	3.33	3.43	-	3.51	3.59	3.71	-	3.74	3.82	3.95	-	3.94	4.03	4.16	-	4.11	4.20	4.35	-	4.26	4.35	4.50	-	
		Amps	13.2	13.5	14.0	-	14.3	14.6	15.1	-	15.5	15.9	16.4	-	16.6	17.0	17.6	-	17.6	18.1	18.7	-	18.7	19.2	19.8	-	
		Hi PR	222	239	252	-	249	268	283	-	283	304	321	-	322	347	366	-	362	390	412	-	400	431	455	-	
	1700	Lo PR	115	122	134	-	122	129	141	-	126	134	147	-	133	141	154	-	139	148	162	-	144	153	167	-	
		MBh	55.5	57.5	63.0	-	54.2	56.2	61.5	-	52.9	54.8	60.1	-	51.6	53.5	58.6	-	49.0	50.8	55.7	-	45.4	47.1	51.6	-	
		S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-	
	75	1350	ΔT	23	20	15	-	23	20	15	-	23	20	15	-	24	20	16	-	23	20	15	-	22	19	14	-
			kW	3.30	3.37	3.48	-	3.56	3.64	3.76	-	3.79	3.88	4.01	-	4.00	4.09	4.23	-	4.17	4.27	4.41	-	4.32	4.42	4.57	-
			Amps	13.4	13.7	14.2	-	14.5	14.9	15.3	-	15.8	16.1	16.7	-	16.8	17.3	17.8	-	17.9	18.4	19.0	-	19.0	19.5	20.1	-
1500		Hi PR	225	243	256	-	253	272	287	-	288	310	327	-	328	353	372	-	369	397	419	-	407	438	463	-	
		Lo PR	117	125	136	-	124	132	144	-	129	137	149	-	135	144	157	-	141	151	164	-	146	156	170	-	
		MBh	57.1	59.2	64.9	-	55.8	57.8	63.4	-	54.5	56.5	61.9	-	53.2	55.1	60.4	-	50.5	52.3	57.3	-	46.8	48.5	53.1	-	
1700		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	
		ΔT	22	19	14	-	22	19	15	-	22	19	15	-	22	19	15	-	22	19	15	-	21	18	14	-	
		kW	3.33	3.40	3.51	-	3.59	3.67	3.79	-	3.83	3.91	4.04	-	4.03	4.12	4.26	-	4.21	4.30	4.45	-	4.36	4.46	4.61	-	
75		1350	Amps	13.5	13.9	14.3	-	14.6	15.0	15.5	-	15.9	16.3	16.8	-	17.0	17.4	18.0	-	18.1	18.5	19.2	-	19.2	19.6	20.3	-
			Hi PR	228	245	259	-	256	275	290	-	291	313	330	-	331	356	376	-	372	401	423	-	411	443	468	-
			Lo PR	116	124	135	-	123	131	143	-	128	136	148	-	134	143	156	-	140	149	163	-	145	155	169	-
	1500	MBh	56.4	58.1	62.9	67.5	55.1	56.7	61.4	65.9	53.8	55.4	59.9	64.3	52.5	54.0	58.5	62.8	49.9	51.3	55.6	59.6	46.2	47.5	51.5	55.2	
		S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.73	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39	
		ΔT	27	25	20	14	27	25	20	14	27	25	20	14	27	25	21	14	27	25	20	14	25	23	19	13	
	1700	kW	3.33	3.40	3.51	3.63	3.59	3.67	3.79	3.92	3.83	3.91	4.04	4.18	4.03	4.12	4.26	4.41	4.21	4.30	4.45	4.60	4.36	4.46	4.61	4.77	
		Amps	13.5	13.9	14.3	14.9	14.6	15.0	15.5	16.1	15.9	16.3	16.8	17.5	17.0	17.4	18.0	18.7	18.1	18.5	19.2	19.9	19.2	19.7	20.3	21.1	
		Hi PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488	
	75	1500	Lo PR	118	126	137	146	125	133	145	155	130	138	151	161	136	145	158	169	143	152	166	177	148	157	172	183
			MBh	58.1	59.8	64.8	69.5	56.8	58.4	63.3	67.9	55.4	57.0	61.7	66.3	54.1	55.7	60.2	64.7	51.4	52.9	57.2	61.4	47.6	49.0	53.0	56.9
			S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.62	0.40	0.93	0.83	0.63	0.41
1700		ΔT	25	23	19	13	26	24	19	13	26	24	19	13	26	24	20	14	26	24	19	13	24	22	18	12	
		kW	3.36	3.43	3.54	3.66	3.62	3.70	3.83	3.96	3.86	3.95	4.08	4.22	4.07	4.16	4.30	4.45	4.24	4.34	4.49	4.64	4.40	4.50	4.65	4.81	
		Amps	13.7	14.0	14.5	15.0	14.8	15.1	15.6	16.2	16.1	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.3	20.1	19.4	19.8	20.5	21.3	
1700		Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	427	446	416	447	472	493	
		Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — SSX160591A\* / CA\*F4961\*6A\* + TXV/MBVC2000\*\* (CONT.)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE													
		65°F				75°F				85°F				95°F				105°F				115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1350	MBh	56.6	57.8	61.7	66.0	55.2	56.4	60.3	64.5	53.9	55.1	58.9	62.9	52.6	53.8	57.4	61.4	50.0	51.1	54.6	58.3	46.3	47.3	50.5	54.0	
		S/T	0.82	0.77	0.62	0.47	0.85	0.79	0.65	0.48	0.87	0.82	0.66	0.50	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.94	0.88	0.72	0.54	
		ΔT	31	30	26	21	32	31	27	21	32	31	27	21	32	31	27	21	32	30	26	21	30	28	25	20	
	1500	kW	3.31	3.38	3.49	3.61	3.57	3.65	3.77	3.90	3.80	3.89	4.02	4.16	4.01	4.10	4.24	4.38	4.18	4.28	4.42	4.58	4.33	4.43	4.58	4.74	
		Amps	13.5	13.8	14.2	14.8	14.5	14.9	15.4	16.0	15.8	16.2	16.7	17.4	16.9	17.3	17.9	18.6	18.0	18.4	19.0	19.8	19.1	19.5	20.2	21.0	
		Hi PR	226	243	257	268	254	273	288	301	289	311	328	342	329	354	374	390	370	398	420	438	409	440	464	484	
	1700	Lo PR	117	125	136	145	124	132	144	153	129	137	150	159	135	144	157	168	142	151	165	176	147	156	170	182	
		MBh	57.4	58.7	62.7	67.0	56.1	57.3	61.2	65.5	54.7	55.9	59.8	63.9	53.4	54.6	58.3	62.3	50.7	51.8	55.4	59.2	47.0	48.0	51.3	54.9	
		S/T	0.85	0.80	0.65	0.48	0.88	0.82	0.67	0.50	0.90	0.85	0.69	0.51	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.97	0.91	0.74	0.56	
	85	1350	ΔT	30	29	25	20	30	29	25	20	30	29	25	20	30	29	25	20	30	29	25	20	28	27	23	19
			kW	3.36	3.43	3.54	3.66	3.62	3.70	3.83	3.96	3.86	3.95	4.08	4.22	4.07	4.16	4.30	4.45	4.24	4.34	4.49	4.64	4.40	4.50	4.65	4.81
			Amps	13.7	14.0	14.5	15.0	14.8	15.1	15.6	16.2	16.1	16.4	17.0	17.6	17.2	17.6	18.2	18.9	18.3	18.7	19.3	20.1	19.4	19.8	20.5	21.3
1500		Hi PR	230	248	261	273	258	278	293	306	294	316	334	348	334	360	380	396	376	405	428	446	416	447	472	493	
		Lo PR	119	127	139	148	126	134	147	156	131	140	152	162	138	147	160	170	144	154	168	179	149	159	173	185	
		MBh	59.1	60.4	64.6	69.0	57.8	59.0	63.1	67.4	56.4	57.6	61.6	65.8	55.0	56.2	60.1	64.2	52.3	53.4	57.1	61.0	48.4	49.5	52.9	56.5	
1700		S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.53	0.94	0.89	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58	
		ΔT	28	27	24	19	29	28	24	19	29	28	24	19	30	28	24	19	30	28	24	19	26	26	22	18	
		kW	3.38	3.46	3.57	3.69	3.65	3.73	3.86	3.99	3.89	3.98	4.11	4.25	4.10	4.19	4.34	4.49	4.28	4.38	4.53	4.68	4.43	4.54	4.69	4.86	
85		1350	Amps	13.8	14.1	14.6	15.1	14.9	15.3	15.8	16.4	16.2	16.6	17.2	17.8	17.3	17.7	18.3	19.0	18.4	18.9	19.5	20.3	19.5	20.0	20.7	21.5
			Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498
			Lo PR	119	126	138	147	125	133	146	155	130	139	151	161	137	146	159	169	143	152	166	177	148	158	172	183
1500	MBh	58.4	59.6	62.4	66.5	57.1	58.2	60.9	65.0	55.7	56.8	59.5	63.4	54.3	55.4	58.0	61.9	51.6	52.6	55.1	58.8	47.8	48.7	51.1	54.5		
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.98	0.89	0.72		
	ΔT	32	31	30	26	32	32	30	26	32	32	30	26	32	32	30	26	32	31	30	26	29	29	28	24		
1700	kW	3.38	3.46	3.57	3.69	3.65	3.73	3.86	3.99	3.89	3.98	4.11	4.25	4.10	4.19	4.34	4.49	4.28	4.38	4.53	4.68	4.43	4.54	4.69	4.86		
	Amps	13.8	14.1	14.6	15.1	14.9	15.3	15.8	16.4	16.2	16.6	17.2	17.8	17.3	17.7	18.3	19.0	18.4	18.9	19.5	20.3	19.5	20.0	20.7	21.5		
	Hi PR	232	250	264	275	261	281	296	309	297	319	337	351	338	363	384	400	380	409	432	450	420	452	477	498		
85	1500	Lo PR	121	128	140	149	127	136	148	158	132	141	154	164	139	148	162	172	146	155	169	180	151	160	175	187	
		MBh	60.2	61.3	64.2	68.5	58.8	59.9	62.7	66.9	57.4	58.5	61.3	65.3	56.0	57.1	59.8	63.8	53.2	54.2	56.8	60.6	49.3	50.2	52.6	56.1	
		S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76	
1700	ΔT	30	30	28	24	31	30	29	25	31	30	29	25	30	30	29	25	30	29	28	25	27	27	23	19		
	kW	3.41	3.49	3.60	3.72	3.68	3.77	3.89	4.02	3.92	4.01	4.15	4.29	4.14	4.23	4.37	4.53	4.32	4.42	4.57	4.73	4.47	4.58	4.73	4.90		
	Amps	13.9	14.3	14.7	15.3	15.0	15.4	15.9	16.5	16.4	16.8	17.3	18.0	17.5	17.9	18.5	19.2	18.6	19.1	19.7	20.5	19.7	20.2	20.9	21.7		
85	1700	Hi PR	235	253	267	278	263	283	299	312	300	322	340	355	341	367	388	404	384	413	436	455	424	456	482	503	
		Lo PR	122	130	142	151	129	137	150	159	134	142	155	165	141	150	163	174	147	157	171	182	152	162	177	188	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



AHRI RATINGS

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0241B*	ASPF313716E*+TXV		24,000	16,800	16.0	13.0	4355457
	AVPTC313714A*		24,000	16,800	16.0	13.0	4431252
	CA*F3636*6D*+EEP+TXV		23,400	16,380	15.0	12.2	4392797
	CA*F3636*6D*+MBVC1600**-1A*+TXV		24,000	16,800	16.0	13.2	4392798
	CA*F3636*6D*+TXV	A*VC950453BXA*	24,000	16,800	16.0	13.2	4392800
	CA*F3636*6D*+TXV	A*VC950704CXA*	24,000	16,800	16.0	13.2	4392801
	CA*F3636*6D*+TXV	A*VC950714CXA*	24,000	16,800	16.0	13.2	4392802
	CA*F3636*6D*+TXV	A*VM960603BXA*	24,000	16,800	16.0	13.2	4652161
	CA*F3636*6D*+TXV	A*VM960604CXA*	24,000	16,800	16.0	13.2	4652176
	CA*F3636*6D*+TXV	G*E80603B*B*	24,000	16,800	16.0	13.0	5038956
	CA*F3636*6D*+TXV	G*VC950453BXA*	24,000	16,800	16.0	13.2	4392806
	CA*F3636*6D*+TXV	G*VC950704CXA*	24,000	16,800	16.0	13.2	4392807
	CA*F3636*6D*+TXV	G*VC950714CXA*	24,000	16,800	16.0	13.2	4392808
	CA*F3636*6D*+TXV	G*VM960603BXA*	24,000	16,800	16.0	13.2	4652163
	CA*F3636*6D*+TXV	G*VM960604CXA*	24,000	16,800	16.0	13.2	4652177
	CA*F3636*6D*+TXV	GME950403BXA*	24,000	16,800	16.0	13.2	4701058
	CA*F3636*6D*+TXV	GME950603BXA*	23,600	16,520	15.5	12.5	4703692
	CA*F3642*6D*+TXV	A*VC80604B*B*	24,000	16,800	15.5	13.0	5039133
	CA*F3642*6D*+TXV	A*VC80805C*B*	24,000	16,800	16.0	13.0	5038959
	CA*F3642*6D*+TXV	A*VC950704CXA*	24,000	16,800	16.0	13.2	3880158
	CA*F3642*6D*+TXV	A*VC950714CXA*	24,000	16,800	16.0	13.2	4201964
	CA*F3642*6D*+TXV	A*VC950905CXA*	24,000	16,800	16.0	13.0	4201375
	CA*F3642*6D*+TXV	A*VC950905DXA*	24,000	16,800	16.0	13.2	3880159
	CA*F3642*6D*+TXV	A*VC950915DXA*	24,000	16,800	16.0	13.2	4201979
	CA*F3642*6D*+TXV	A*VM960604CXA*	24,000	16,800	16.0	13.2	4652181
	CA*F3642*6D*+TXV	A*VM960805CXA*	24,000	16,800	16.0	13.0	4652152
	CA*F3642*6D*+TXV	A*VM960805DXA*	24,000	16,800	16.0	13.2	4652203
	CA*F3642*6D*+TXV	ADVC80805C*B*	24,000	16,800	16.0	13.0	5039132
	CA*F3642*6D*+TXV	G*VC80604B*B*	24,000	16,800	15.5	13.0	5039040
	CA*F3642*6D*+TXV	G*VC80805C*B*	24,000	16,800	16.0	13.0	5039131
	CA*F3642*6D*+TXV	G*VC950704CXA*	24,000	16,800	16.0	13.2	3880164
	CA*F3642*6D*+TXV	G*VC950714CXA*	24,000	16,800	16.0	13.2	4201965
	CA*F3642*6D*+TXV	G*VC950905CXA*	24,000	16,800	16.0	13.0	4201376
	CA*F3642*6D*+TXV	G*VC950905DXA*	24,000	16,800	16.0	13.2	3880165
	CA*F3642*6D*+TXV	G*VC950915DXA*	24,000	16,800	16.0	13.2	4201980
	CA*F3642*6D*+TXV	G*VM960604CXA*	24,000	16,800	16.0	13.2	4652179
	CA*F3642*6D*+TXV	G*VM960805CXA*	24,000	16,800	16.0	13.0	4652153
	CA*F3642*6D*+TXV	G*VM960805DXA*	24,000	16,800	16.0	13.2	4652204
	CA*F3642*6D*+TXV	GME950603BXA*	23,600	16,520	16.0	13.2	4703694
	CA*F3743*6D*+TXV	A*VC80805C*B*	24,000	16,800	16.0	13.0	5039134
	CA*F3743*6D*+TXV	A*VC950704CXA*	24,000	16,800	16.0	13.2	4415130
	CA*F3743*6D*+TXV	A*VC950714CXA*	24,000	16,800	16.0	13.2	4415167
	CA*F3743*6D*+TXV	A*VC950905CXA*	24,000	16,800	16.0	13.0	4415151
	CA*F3743*6D*+TXV	A*VC950905DXA*	24,000	16,800	16.0	13.2	4415131
	CA*F3743*6D*+TXV	A*VC950915DXA*	24,000	16,800	16.0	13.2	4415169
	CA*F3743*6D*+TXV	A*VM960604CXA*	24,000	16,800	16.0	13.2	4652185
	CA*F3743*6D*+TXV	A*VM960805CXA*	24,000	16,800	16.0	13.0	4652156
	CA*F3743*6D*+TXV	A*VM960805DXA*	24,000	16,800	16.0	13.2	4652207
	CA*F3743*6D*+TXV	ADVC80805C*B*	24,000	16,800	16.0	13.0	5038958
	CA*F3743*6D*+TXV	G*VC80805C*B*	24,000	16,800	16.0	13.0	5038957
CA*F3743*6D*+TXV	G*VC950704CXA*	24,000	16,800	16.0	13.2	4415086	
CA*F3743*6D*+TXV	G*VC950714CXA*	24,000	16,800	16.0	13.2	4415168	

See Notes on Page 26.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0241B* (cont.)	CA*F3743*6D*+TXV	G*VC950905CXA*	24,000	16,800	16.0	13.0	4415150
	CA*F3743*6D*+TXV	G*VC950905DXA*	24,000	16,800	16.0	13.2	4415088
	CA*F3743*6D*+TXV	G*VC950915DXA*	24,000	16,800	16.0	13.2	4415170
	CA*F3743*6D*+TXV	G*VM960604CXA*	24,000	16,800	16.0	13.2	4652186
	CA*F3743*6D*+TXV	G*VM960805CXA*	24,000	16,800	16.0	13.0	4652157
	CA*F3743*6D*+TXV	G*VM960805DXA*	24,000	16,800	16.0	13.2	4652208
	CA*F3743*6D*+TXV	GME950603BXA*	23,600	16,520	16.0	13.2	4703696
	CHPF3636B6C*+EEP+TXV		23,000	16,100	14.5	12.0	3586356
	CHPF3636B6C*+MBVC1200** -1A*+TXV		24,000	16,800	16.0	13.2	3609495
	CHPF3636B6C*+TXV	A*VM960604CXA*	24,000	16,800	16.0	13.2	4652189
	CHPF3636B6C*+TXV	G*E80603B*B*	24,600	17,220	16.0	13.0	5038857
	CHPF3636B6C*+TXV	G*VM960604CXA*	24,000	16,800	16.0	13.2	4652188
	CHPF3642C6C*+TXV	A*VC80604B*B*	24,000	16,800	15.5	13.0	5039041
	CHPF3642C6C*+TXV	A*VC81005C*B*	24,000	16,800	16.0	13.0	5038838
	CHPF3642C6C*+TXV	A*VC950704CXA*	24,000	16,800	16.0	13.5	3850612
	CHPF3642C6C*+TXV	A*VM960604CXA*	24,000	16,800	16.0	13.5	4652193
	CHPF3642C6C*+TXV	ADVC81005C*B*	24,000	16,800	16.0	13.0	5038993
	CHPF3642C6C*+TXV	G*VC80604B*B*	24,000	16,800	15.5	13.0	5039157
	CHPF3642C6C*+TXV	G*VC81005C*B*	24,000	16,800	16.0	13.0	5039158
	CHPF3642C6C*+TXV	G*VC950453BXA*	24,000	16,800	15.0	13.0	4559591
	CHPF3642C6C*+TXV	G*VC950704CXA*	24,000	16,800	16.0	13.5	3598303
	CHPF3642C6C*+TXV	G*VM960603BXA*	24,000	16,800	15.0	13.0	4652167
	CHPF3642C6C*+TXV	G*VM960604CXA*	24,000	16,800	16.0	13.5	4652192
	CHPF3642C6C*+TXV	GME950403BXA*	24,000	16,800	15.0	13.0	4701110
	CHPF3642C6C*+TXV	GME950603BXA*	23,800	16,660	15.5	13.0	4703698
	CHPF3743C6B*+TXV	A*VC80604B*B*	24,000	16,800	15.5	13.0	5039135
	CHPF3743C6B*+TXV	G*VC80604B*B*	24,000	16,800	15.5	13.0	5039159
CSCF3642N6D*+TXV	G*VC950704CXA*	24,000	16,800	16.0	13.0	4767574	
SSX16 0301A*	ASPF313716E*+TXV		29,000	22,040	16.0	13.0	4355458
	AVPTC313714A*		29,000	22,040	16.0	13.0	4431254
	CA*F3642*6D*+EEP+TXV		28,800	21,890	14.5	12.2	4482928
	CA*F3642*6D*+MBVC1600** -1A*+TXV		29,000	22,040	16.0	13.0	3880068
	CA*F3642*6D*+TXV	A*VC80604B*B*	28,600	21,740	15.0	12.5	5039273
	CA*F3642*6D*+TXV	A*VC80805C*B*	27,800	21,130	15.0	12.5	5039062
	CA*F3642*6D*+TXV	A*VC81005C*B*	28,400	21,580	15.5	12.7	5039217
	CA*F3642*6D*+TXV	A*VC950453BXA*	28,600	21,740	15.0	12.5	3880175
	CA*F3642*6D*+TXV	A*VC950704CXA*	28,600	21,740	15.0	12.5	3880176
	CA*F3642*6D*+TXV	A*VC950714CXA*	28,600	21,740	15.0	12.5	4201986
	CA*F3642*6D*+TXV	A*VC950905CXA*	28,800	21,890	15.5	12.7	4201382
	CA*F3642*6D*+TXV	A*VC950905DXA*	28,800	21,890	16.0	13.0	3880177
	CA*F3642*6D*+TXV	A*VC950915DXA*	28,800	21,890	16.0	13.0	4202000
	CA*F3642*6D*+TXV	A*VC951155DXA*	28,600	21,740	15.0	12.5	3880178
	CA*F3642*6D*+TXV	A*VM960603BXA*	28,600	21,740	15.0	12.5	4652265
	CA*F3642*6D*+TXV	A*VM960604CXA*	28,600	21,740	15.0	12.5	4652274
	CA*F3642*6D*+TXV	A*VM960805CXA*	28,800	21,890	15.5	12.7	4652287
	CA*F3642*6D*+TXV	A*VM960805DXA*	28,800	21,890	16.0	13.0	4652377
	CA*F3642*6D*+TXV	A*VM961005DXA*	28,600	21,740	15.0	12.5	4652252
	CA*F3642*6D*+TXV	A*VM961155DXA*	28,600	21,740	15.0	12.5	4652238
	CA*F3642*6D*+TXV	ADVC80805C*B*	27,800	21,130	15.0	12.5	5038916
	CA*F3642*6D*+TXV	ADVC81005C*B*	27,800	21,130	15.5	12.7	5039056
	CA*F3642*6D*+TXV	G*E80603B*B*	28,400	21,580	15.0	12.5	5038897
CA*F3642*6D*+TXV	G*E80805C*B*	28,400	21,580	15.0	12.5	5038915	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0301A* (cont.)	CA*F3642*6D*+TXV	G*E81005C*B*	28,800	21,890	15.0	12.5	5039136
	CA*F3642*6D*+TXV	G*VC80604B*B*	28,600	21,740	15.0	12.5	5039076
	CA*F3642*6D*+TXV	G*VC80805C*B*	27,800	21,130	15.0	12.5	5039069
	CA*F3642*6D*+TXV	G*VC81005C*B*	28,400	21,580	15.5	12.7	5039086
	CA*F3642*6D*+TXV	G*VC950453BXA*	28,800	21,890	15.0	12.5	3880191
	CA*F3642*6D*+TXV	G*VC950704CXA*	28,600	21,740	15.0	12.5	3880192
	CA*F3642*6D*+TXV	G*VC950714CXA*	28,600	21,740	15.0	12.5	4201987
	CA*F3642*6D*+TXV	G*VC950905CXA*	28,800	21,890	15.5	12.7	4201383
	CA*F3642*6D*+TXV	G*VC950905DXA*	28,600	21,740	16.0	13.0	3880193
	CA*F3642*6D*+TXV	G*VC950915DXA*	28,600	21,740	16.0	13.0	4202001
	CA*F3642*6D*+TXV	G*VC951155DXA*	28,600	21,740	15.0	12.5	3880194
	CA*F3642*6D*+TXV	G*VM960603BXA*	28,800	21,890	15.0	12.5	4652299
	CA*F3642*6D*+TXV	G*VM960604CXA*	28,600	21,740	15.0	12.5	4652275
	CA*F3642*6D*+TXV	G*VM960805CXA*	28,800	21,890	15.5	12.7	4652288
	CA*F3642*6D*+TXV	G*VM960805DXA*	28,600	21,740	16.0	13.0	4652276
	CA*F3642*6D*+TXV	G*VM961005DXA*	28,600	21,740	15.0	12.5	4652251
	CA*F3642*6D*+TXV	G*VM961155DXA*	28,600	21,740	15.0	12.5	4652237
	CA*F3642*6D*+TXV	GME950403BXA*	28,600	21,740	15.0	12.5	4701061
	CA*F3642*6D*+TXV	GME950603BXA*	28,400	21,580	15.0	12.5	4703701
	CA*F3743*6D*+MBVC1600*-1A*+TXV		28,800	21,890	16.0	13.0	4415112
	CA*F3743*6D*+TXV	A*VC80604B*B*	27,800	21,130	15.5	12.7	5039190
	CA*F3743*6D*+TXV	A*VC80805C*B*	27,800	21,130	15.5	12.7	5039072
	CA*F3743*6D*+TXV	A*VC81005C*B*	28,400	21,580	15.5	12.7	5038903
	CA*F3743*6D*+TXV	A*VC950453BXA*	28,800	21,890	15.0	12.5	4415117
	CA*F3743*6D*+TXV	A*VC950704CXA*	28,800	21,890	15.5	12.7	4415118
	CA*F3743*6D*+TXV	A*VC950714CXA*	28,800	21,890	15.5	12.7	4415171
	CA*F3743*6D*+TXV	A*VC950905CXA*	28,800	21,890	16.0	13.0	4415152
	CA*F3743*6D*+TXV	A*VC950905DXA*	28,800	21,890	16.0	13.0	4415119
	CA*F3743*6D*+TXV	A*VC950915DXA*	28,800	21,890	16.0	13.0	4415173
	CA*F3743*6D*+TXV	A*VC951155DXA*	28,800	21,890	16.0	13.0	4415120
	CA*F3743*6D*+TXV	A*VM960603BXA*	28,800	21,890	15.0	12.5	4652313
	CA*F3743*6D*+TXV	A*VM960604CXA*	28,800	21,890	15.5	12.7	4652354
	CA*F3743*6D*+TXV	A*VM960805CXA*	28,800	21,890	16.0	13.0	4652291
	CA*F3743*6D*+TXV	A*VM960805DXA*	28,800	21,890	16.0	13.0	4652380
	CA*F3743*6D*+TXV	A*VM961005DXA*	28,800	21,890	16.0	13.0	4652284
	CA*F3743*6D*+TXV	A*VM961155DXA*	28,800	21,890	16.0	13.0	4652279
	CA*F3743*6D*+TXV	ADVC80805C*B*	27,800	21,130	15.5	12.7	5039070
	CA*F3743*6D*+TXV	ADVC81005C*B*	27,800	21,130	15.5	12.7	5039165
	CA*F3743*6D*+TXV	G*E80603B*B*	28,400	21,580	15.0	12.5	5038985
	CA*F3743*6D*+TXV	G*E80805C*B*	28,400	21,580	15.0	12.5	5039267
	CA*F3743*6D*+TXV	G*E81005C*B*	28,800	21,890	15.0	12.5	5038839
	CA*F3743*6D*+TXV	G*VC80604B*B*	27,800	21,130	15.5	12.7	5038887
	CA*F3743*6D*+TXV	G*VC80805C*B*	27,800	21,130	15.5	12.7	5039206
	CA*F3743*6D*+TXV	G*VC81005C*B*	28,400	21,580	15.5	12.7	5039077
	CA*F3743*6D*+TXV	G*VC950704CXA*	28,800	21,890	15.5	12.7	4415127
	CA*F3743*6D*+TXV	G*VC950714CXA*	28,800	21,890	15.5	12.7	4415172
	CA*F3743*6D*+TXV	G*VC950905CXA*	28,800	21,890	16.0	13.0	4415153
	CA*F3743*6D*+TXV	G*VC950905DXA*	28,800	21,890	16.0	13.0	4415128
	CA*F3743*6D*+TXV	G*VC950915DXA*	28,800	21,890	16.0	13.0	4415174
	CA*F3743*6D*+TXV	G*VC951155DXA*	28,800	21,890	16.0	13.0	4415129
CA*F3743*6D*+TXV	G*VM960603BXA*	28,800	21,890	15.0	12.5	5010813	
CA*F3743*6D*+TXV	G*VM960604CXA*	28,800	21,890	15.5	12.7	4652353	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0301A* (cont.)	CA*F3743*6D*+TXV	G*VM960805CXA*	28,800	21,890	16.0	13.0	4652292
	CA*F3743*6D*+TXV	G*VM960805DXA*	28,800	21,890	16.0	13.0	4652381
	CA*F3743*6D*+TXV	G*VM961005DXA*	28,800	21,890	16.0	13.0	4652285
	CA*F3743*6D*+TXV	G*VM961155DXA*	28,800	21,890	16.0	13.0	4652280
	CA*F3743*6D*+TXV	GME950403BXA*	28,800	21,890	15.0	12.5	4701072
	CA*F3743*6D*+TXV	GME950603BXA*	28,600	21,740	15.0	12.5	4703703
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,800	21,890	16.0	13.0	3835004
	CHPF3642C6C*+TXV	A*VC80604B*B*	27,800	21,130	15.5	12.7	5039169
	CHPF3642C6C*+TXV	A*VC80604B*B*	27,800	21,130	15.5	12.7	5039169
	CHPF3642C6C*+TXV	A*VC80805C*B*	27,800	21,130	15.5	12.7	5039081
	CHPF3642C6C*+TXV	A*VC81005C*B*	27,800	21,130	15.5	12.7	5038875
	CHPF3642C6C*+TXV	A*VC950453BXA*	28,800	21,890	15.0	12.5	3835014
	CHPF3642C6C*+TXV	A*VC950704CXA*	28,800	21,890	15.5	12.7	3835015
	CHPF3642C6C*+TXV	A*VM960603BXA*	28,800	21,890	15.0	12.5	4652322
	CHPF3642C6C*+TXV	A*VM960604CXA*	28,800	21,890	15.5	12.7	4652362
	CHPF3642C6C*+TXV	ADVC80805C*B*	27,800	21,130	15.5	12.7	5039000
	CHPF3642C6C*+TXV	ADVC81005C*B*	27,800	21,130	15.5	12.7	5039167
	CHPF3642C6C*+TXV	G*E80603B*B*	28,400	21,580	15.0	12.5	5038917
	CHPF3642C6C*+TXV	G*E80805C*B*	28,400	21,580	15.0	12.5	5039268
	CHPF3642C6C*+TXV	G*E81005C*B*	28,800	21,890	15.0	12.5	5038960
	CHPF3642C6C*+TXV	G*VC80604B*B*	27,800	21,130	15.5	12.7	5039166
	CHPF3642C6C*+TXV	G*VC80805C*B*	27,800	21,130	15.5	12.7	5038999
	CHPF3642C6C*+TXV	G*VC81005C*B*	27,800	21,130	15.5	12.7	5038976
	CHPF3642C6C*+TXV	G*VC950453BXA*	28,800	21,890	15.0	12.5	3835027
	CHPF3642C6C*+TXV	G*VC950704CXA*	28,800	21,890	15.5	12.7	3835028
	CHPF3642C6C*+TXV	G*VM960603BXA*	28,800	21,890	15.0	12.5	4652323
	CHPF3642C6C*+TXV	G*VM960604CXA*	28,800	21,890	15.5	12.7	4652363
	CHPF3642C6C*+TXV	GME950403BXA*	28,800	21,890	15.0	12.5	4701109
	CHPF3642C6C*+TXV	GME950603BXA*	28,600	21,740	15.0	12.5	4703704
	CHPF3642D6C*+MBVC2000**-1A*+TXV		28,800	21,890	15.5	12.7	3835030
	CHPF3642D6C*+TXV	A*VC950905CXA*	28,800	21,890	16.0	13.0	4201386
	CHPF3642D6C*+TXV	A*VC950905DXA*	28,800	21,890	16.0	13.0	3835034
	CHPF3642D6C*+TXV	A*VC951155DXA*	28,800	21,890	16.0	13.0	3835035
	CHPF3642D6C*+TXV	A*VM960805CXA*	28,800	21,890	16.0	13.0	4652294
	CHPF3642D6C*+TXV	A*VM960805DXA*	28,800	21,890	16.0	13.0	4652384
	CHPF3642D6C*+TXV	A*VM961005DXA*	28,800	21,890	16.0	13.0	4652286
	CHPF3642D6C*+TXV	A*VM961155DXA*	28,800	21,890	16.0	13.0	4652281
	CHPF3743C6B*+MBVC1600**-1A*+TXV		29,000	22,040	16.0	13.0	3835037
	CHPF3743C6B*+MBVC2000**-1A*+TXV		29,000	22,040	16.0	13.0	3836954
	CHPF3743C6B*+TXV	A*VC80604B*B*	27,800	21,130	15.5	12.7	5039057
	CHPF3743C6B*+TXV	A*VC80805C*B*	27,800	21,130	15.5	12.7	5039002
	CHPF3743C6B*+TXV	A*VC81005C*B*	27,800	21,130	15.5	12.7	5039170
	CHPF3743C6B*+TXV	A*VC950453BXA*	29,000	22,040	15.5	12.7	3835049
	CHPF3743C6B*+TXV	A*VC950704CXA*	29,000	22,040	16.0	13.0	3835050
	CHPF3743C6B*+TXV	A*VC950905CXA*	29,000	22,040	16.0	13.0	4201387
	CHPF3743C6B*+TXV	A*VM960603BXA*	29,000	22,040	15.5	12.7	4652404
	CHPF3743C6B*+TXV	A*VM960604CXA*	29,000	22,040	16.0	13.0	4652407
	CHPF3743C6B*+TXV	A*VM960805CXA*	29,000	22,040	16.0	13.0	4652399
	CHPF3743C6B*+TXV	A*VM960805DXA*	29,000	22,040	16.0	13.0	4652427
	CHPF3743C6B*+TXV	A*VM961005DXA*	29,000	22,040	16.0	13.0	4652388
CHPF3743C6B*+TXV	A*VM961155DXA*	29,000	22,040	16.0	13.0	4652385	
CHPF3743C6B*+TXV	ADVC80805C*B*	27,800	21,130	15.5	12.7	5039269	
CHPF3743C6B*+TXV	ADVC81005C*B*	27,800	21,130	15.5	12.7	5039168	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0301A* (cont.)	CHPF3743C6B*+TXV	G*E80603B*B*	28,400	21,580	15.0	12.5	5039001
	CHPF3743C6B*+TXV	G*E80805C*B*	28,400	21,580	15.0	12.5	5039184
	CHPF3743C6B*+TXV	G*E81005C*B*	29,000	22,040	15.0	12.5	5038928
	CHPF3743C6B*+TXV	G*VC80604B*B*	27,800	21,130	15.5	12.7	5039020
	CHPF3743C6B*+TXV	G*VC80805C*B*	27,800	21,130	15.5	12.7	5039207
	CHPF3743C6B*+TXV	G*VC81005C*B*	27,800	21,130	15.5	12.7	5039257
	CHPF3743C6B*+TXV	G*VC950453BXA*	29,000	22,040	15.5	12.7	3835064
	CHPF3743C6B*+TXV	G*VC950704CXA*	29,000	22,040	16.0	13.0	3835065
	CHPF3743C6B*+TXV	G*VC950905CXA*	29,000	22,040	16.0	13.0	4559592
	CHPF3743C6B*+TXV	G*VM960603BXA*	29,000	22,040	15.5	12.7	4652403
	CHPF3743C6B*+TXV	G*VM960604CXA*	29,000	22,040	16.0	13.0	4652408
	CHPF3743C6B*+TXV	G*VM960805CXA*	29,000	22,040	16.0	13.0	4652400
	CHPF3743C6B*+TXV	G*VM960805DXA*	29,000	22,040	16.0	13.0	4652428
	CHPF3743C6B*+TXV	GME950403BXA*	29,000	22,040	15.5	12.7	4701115
	CHPF3743C6B*+TXV	GME950603BXA*	28,800	21,890	16.0	13.0	4703705
	CHPF3743D6B*+TXV	A*VC80604B*B*	28,600	21,740	15.5	12.7	5039078
	CHPF3743D6B*+TXV	A*VC80805C*B*	27,800	21,130	15.5	12.7	5039208
	CHPF3743D6B*+TXV	A*VC950453BXA*	29,000	22,040	15.5	12.7	3835077
	CHPF3743D6B*+TXV	A*VC950704CXA*	29,000	22,040	16.0	13.0	3835078
	CHPF3743D6B*+TXV	A*VC950905CXA*	29,000	22,040	16.0	13.0	4201388
	CHPF3743D6B*+TXV	A*VC950905DXA*	29,000	22,040	16.0	13.0	3835079
	CHPF3743D6B*+TXV	A*VC951155DXA*	29,000	22,040	16.0	13.0	3835080
	CHPF3743D6B*+TXV	A*VM960603BXA*	29,000	22,040	15.5	12.7	4652405
	CHPF3743D6B*+TXV	A*VM960604CXA*	29,000	22,040	16.0	13.0	4652409
	CHPF3743D6B*+TXV	A*VM960805CXA*	29,000	22,040	16.0	13.0	4652401
	CHPF3743D6B*+TXV	A*VM960805DXA*	29,000	22,040	16.0	13.0	4652429
	CHPF3743D6B*+TXV	A*VM961005DXA*	29,000	22,040	16.0	13.0	4652389
	CHPF3743D6B*+TXV	A*VM961155DXA*	29,000	22,040	16.0	13.0	4652386
	CHPF3743D6B*+TXV	ADVC80805C*B*	27,800	21,130	15.5	12.7	5038918
	CHPF3743D6B*+TXV	G*VC80604B*B*	28,600	21,740	15.5	12.7	5039272
	CHPF3743D6B*+TXV	G*VC80805C*B*	27,800	21,130	15.5	12.7	5039071
	CHPF3743D6B*+TXV	GME950403BXA*	29,000	22,040	15.5	12.7	4701118
	CHPF3743D6B*+TXV	GME950603BXA*	28,800	21,890	16.0	13.0	4703706
	CHPF4860D6D*+EEP+TXV		28,800	21,890	14.5	12.2	5361290
	CSCF3642N6D*+TXV	A*VC950453BXA*	28,800	21,890	15.5	12.7	4767578
	CSCF3642N6D*+TXV	A*VC950704CXA*	28,800	21,890	16.0	13.0	4767579
	CSCF3642N6D*+TXV	A*VC950905CXA*	29,000	22,040	16.0	13.0	4767580
	CSCF3642N6D*+TXV	A*VC950905DXA*	29,000	22,040	16.0	13.0	4767581
	CSCF3642N6D*+TXV	A*VC951155DXA*	29,000	22,040	16.0	13.0	4767582
	CSCF3642N6D*+TXV	G*VC950453BXA*	29,000	22,040	15.5	12.7	4767590
	CSCF3642N6D*+TXV	G*VC950704CXA*	29,000	22,040	16.0	13.0	4767591

<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B*	ASPF426016E*+TXV		34,600	27,680	15.5	12.5	4358276
	AVPTC426014A*		34,600	27,680	16.0	13.0	4431263
	CA*F3636*6D*	A*VC80604B*B*	33,400	26,720	15.0	12.5	5325852
	CA*F3636*6D*	A*VC80805C*B*	33,400	26,720	15.0	12.5	5325871
	CA*F3636*6D*	A*VC81005C*B*	33,400	26,720	15.0	12.5	5325904
	CA*F3636*6D*	A*VC950704CXA*	33,400	26,720	15.0	12.5	5325936
	CA*F3636*6D*	A*VC950905CXA*	33,400	26,720	14.5	12.0	5325968
	CA*F3636*6D*	A*VC950905DXA*	33,400	26,720	14.5	12.0	5326000
	CA*F3636*6D*	A*VC951155DXA*	33,400	26,720	15.0	12.5	5326030
	CA*F3636*6D*	A*VM960604CXA*	33,400	26,720	14.5	12.0	5326060
	CA*F3636*6D*	A*VM960805CXA*	33,400	26,720	14.5	12.0	5326094
	CA*F3636*6D*	A*VM960805DXA*	33,400	26,720	15.0	12.5	5326311
	CA*F3636*6D*	A*VM961005DXA*	33,400	26,720	15.0	12.5	5326153
	CA*F3636*6D*	A*VM961155DXA*	33,400	26,720	15.0	12.5	5326184
	CA*F3636*6D*	ADVC80805C*B*	33,400	26,720	15.0	12.5	5326215
	CA*F3636*6D*	ADVC81005C*B*	33,400	26,720	15.0	12.5	5326232
	CA*F3636*6D*	G*E80603B*B*	33,400	26,720	14.5	12.0	5325820
	CA*F3636*6D*	G*E80805C*B*	33,400	26,720	15.0	12.5	5325827
	CA*F3636*6D*	G*E81005C*B*	33,400	26,720	15.0	12.5	5326294
	CA*F3636*6D*	G*VC80604B*B*	33,400	26,720	15.0	12.5	5325853
	CA*F3636*6D*	G*VC80805C*B*	33,400	26,720	15.0	12.5	5325872
	CA*F3636*6D*	G*VC81005C*B*	33,400	26,720	15.0	12.5	5325905
	CA*F3636*6D*	G*VC950704CXA*	33,400	26,720	15.0	12.5	5325937
	CA*F3636*6D*	G*VC950905CXA*	33,400	26,720	14.5	12.0	5325969
	CA*F3636*6D*	G*VC950905DXA*	33,400	26,720	14.5	12.0	5326001
	CA*F3636*6D*	G*VC951155DXA*	33,400	26,720	15.0	12.5	5326031
	CA*F3636*6D*	G*VM960604CXA*	33,400	26,720	14.5	12.0	5326061
	CA*F3636*6D*	G*VM960805CXA*	33,400	26,720	14.5	12.0	5326095
	CA*F3636*6D*	G*VM960805DXA*	33,400	26,720	15.0	12.5	5326312
	CA*F3636*6D*	G*VM961005DXA*	33,400	26,720	15.0	12.5	5326154
	CA*F3636*6D*	G*VM961155DXA*	33,400	26,720	15.0	12.5	5326185
	CA*F3636*6D*	GME950603BXA*	33,400	26,720	14.0	11.8	5326249
	CA*F3636*6D*	GME950805CXA*	33,400	26,720	14.5	12.0	5326259
	CA*F3636*6D*	GME951005DXA*	33,400	26,720	14.5	12.5	5326276
	CA*F3636*6D*+EEP		33,400	26,720	14.0	11.8	5325782
	CA*F3636*6D*+EEP+TXV		33,400	26,720	14.0	11.8	5325783
	CA*F3636*6D*+MBVC1600**-1A*		33,400	26,720	15.0	12.5	5326904
	CA*F3636*6D*+MBVC1600**-1A*+TXV		33,400	26,720	15.5	12.5	5325784
	CA*F3636*6D*+MBVC2000**-1A*		33,400	26,720	15.0	12.5	5326905
	CA*F3636*6D*+MBVC2000**-1A*+TXV		33,400	26,720	15.5	12.5	5326906
	CA*F3636*6D*+TXV	A*VC80604B*B*	33,400	26,720	15.1	12.5	5325854
	CA*F3636*6D*+TXV	A*VC80805C*B*	33,400	26,720	15.1	12.5	5325873
	CA*F3636*6D*+TXV	A*VC81005C*B*	33,400	26,720	15.1	12.5	5326305
	CA*F3636*6D*+TXV	A*VC950704CXA*	33,400	26,720	15.0	12.5	5325938
	CA*F3636*6D*+TXV	A*VC950905CXA*	33,400	26,720	15.0	12.5	5325970
	CA*F3636*6D*+TXV	A*VC950905DXA*	33,400	26,720	15.0	12.5	5326002
	CA*F3636*6D*+TXV	A*VC951155DXA*	33,400	26,720	15.1	12.5	5326032
CA*F3636*6D*+TXV	A*VM960604CXA*	33,400	26,720	14.5	12.0	5326062	
CA*F3636*6D*+TXV	A*VM960805CXA*	33,400	26,720	15.0	12.5	5326096	
CA*F3636*6D*+TXV	A*VM960805DXA*	33,400	26,720	15.1	12.5	5326313	
CA*F3636*6D*+TXV	A*VM961005DXA*	33,400	26,720	15.1	12.5	5326155	
CA*F3636*6D*+TXV	A*VM961155DXA*	33,400	26,720	15.1	12.5	5326186	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CA*F3636*6D*+TXV	ADVC80805C*B*	33,400	26,720	15.1	12.5	5326216
	CA*F3636*6D*+TXV	ADVC81005C*B*	33,400	26,720	15.1	12.5	5326233
	CA*F3636*6D*+TXV	G*E80603B*B*	33,400	26,720	15.0	12.5	5325821
	CA*F3636*6D*+TXV	G*E80805C*B*	33,400	26,720	15.1	12.5	5325828
	CA*F3636*6D*+TXV	G*E81005C*B*	33,400	26,720	15.1	12.5	5326295
	CA*F3636*6D*+TXV	G*VC80604B*B*	33,400	26,720	15.1	12.5	5326303
	CA*F3636*6D*+TXV	G*VC80805C*B*	33,400	26,720	15.1	12.5	5326304
	CA*F3636*6D*+TXV	G*VC81005C*B*	33,400	26,720	15.1	12.5	5326306
	CA*F3636*6D*+TXV	G*VC950704CXA*	33,400	26,720	15.0	12.5	5325939
	CA*F3636*6D*+TXV	G*VC950905CXA*	33,400	26,720	15.0	12.5	5325971
	CA*F3636*6D*+TXV	G*VC950905DXA*	33,400	26,720	15.0	12.5	5326003
	CA*F3636*6D*+TXV	G*VC951155DXA*	33,400	26,720	15.1	12.5	5326033
	CA*F3636*6D*+TXV	G*VM960604CXA*	33,400	26,720	14.5	12.0	5326063
	CA*F3636*6D*+TXV	G*VM960805CXA*	33,400	26,720	15.0	12.5	5326097
	CA*F3636*6D*+TXV	G*VM960805DXA*	33,400	26,720	15.1	12.5	5326314
	CA*F3636*6D*+TXV	G*VM961005DXA*	33,400	26,720	15.1	12.5	5326156
	CA*F3636*6D*+TXV	G*VM961155DXA*	33,400	26,720	15.1	12.5	5326187
	CA*F3636*6D*+TXV	GME950603BXA*	33,400	26,720	14.0	11.8	5326250
	CA*F3636*6D*+TXV	GME950805CXA*	33,400	26,720	14.5	12.0	5326260
	CA*F3636*6D*+TXV	GME951005DXA*	33,400	26,720	15.0	12.5	5326277
	CA*F3642*6D*	A*VC80604B*B*	33,400	26,720	15.1	12.5	5325855
	CA*F3642*6D*	A*VC80805C*B*	33,400	26,720	15.0	12.5	5325874
	CA*F3642*6D*	A*VC81005C*B*	33,400	26,720	15.0	12.5	5325906
	CA*F3642*6D*	A*VC950704CXA*	33,400	26,720	15.0	12.5	5325940
	CA*F3642*6D*	A*VC950905CXA*	33,400	26,720	15.0	12.5	5325972
	CA*F3642*6D*	A*VC950905DXA*	33,400	26,720	15.0	12.5	5326004
	CA*F3642*6D*	A*VC951155DXA*	33,400	26,720	15.0	12.5	5326034
	CA*F3642*6D*	A*VM960604CXA*	33,400	26,720	14.5	12.0	5326064
	CA*F3642*6D*	A*VM960805CXA*	33,400	26,720	15.0	12.5	5326098
	CA*F3642*6D*	A*VM960805DXA*	33,400	26,720	15.0	12.5	5326127
	CA*F3642*6D*	A*VM961005DXA*	33,400	26,720	15.0	12.5	5326157
	CA*F3642*6D*	A*VM961155DXA*	33,400	26,720	15.0	12.5	5326188
	CA*F3642*6D*	ADVC80805C*B*	33,400	26,720	15.0	12.5	5326217
	CA*F3642*6D*	ADVC81005C*B*	33,400	26,720	15.0	12.5	5326234
	CA*F3642*6D*	G*E80603B*B*	33,400	26,720	15.0	12.5	5325822
	CA*F3642*6D*	G*E80805C*B*	33,400	26,720	15.5	12.5	5325829
	CA*F3642*6D*	G*E81005C*B*	33,400	26,720	15.5	12.5	5326296
	CA*F3642*6D*	G*VC80604B*B*	33,400	26,720	15.1	12.5	5325856
	CA*F3642*6D*	G*VC80805C*B*	33,400	26,720	15.0	12.5	5325875
	CA*F3642*6D*	G*VC81005C*B*	33,400	26,720	15.0	12.5	5325907
	CA*F3642*6D*	G*VC950704CXA*	33,400	26,720	15.0	12.5	5325941
	CA*F3642*6D*	G*VC950905CXA*	33,400	26,720	15.0	12.5	5325973
CA*F3642*6D*	G*VC950905DXA*	33,400	26,720	15.0	12.5	5326005	
CA*F3642*6D*	G*VC951155DXA*	33,400	26,720	15.0	12.5	5326035	
CA*F3642*6D*	G*VM960604CXA*	33,400	26,720	14.5	12.0	5326065	
CA*F3642*6D*	G*VM960805CXA*	33,400	26,720	15.0	12.5	5326099	
CA*F3642*6D*	G*VM960805DXA*	33,400	26,720	15.0	12.5	5326128	
CA*F3642*6D*	G*VM961005DXA*	33,400	26,720	15.0	12.5	5326158	
CA*F3642*6D*	G*VM961155DXA*	33,400	26,720	15.0	12.5	5326189	
CA*F3642*6D*	GME950603BXA*	33,400	26,720	14.0	12.0	5326251	
CA*F3642*6D*	GME950805CXA*	33,400	26,720	14.5	12.0	5326261	
CA*F3642*6D*	GME951005DXA*	33,400	26,720	15.0	12.5	5326278	

See Notes on Page 26.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CA*F3642*6D*+EEP		33,400	26,720	14.0	12.0	5325785
	CA*F3642*6D*+EEP+TXV		33,400	26,720	14.5	12.0	5325786
	CA*F3642*6D*+MBVC1600**-1A*		33,400	26,720	15.0	12.5	5325787
	CA*F3642*6D*+MBVC1600**-1A*+TXV		33,400	26,720	15.5	12.5	5325788
	CA*F3642*6D*+MBVC2000**-1A*		33,400	26,720	16.0	13.0	5325789
	CA*F3642*6D*+MBVC2000**-1A*+TXV		33,400	26,720	16.0	13.0	5326907
	CA*F3642*6D*+TXV	A*VC80604B*B*	33,400	26,720	15.5	12.5	5325857
	CA*F3642*6D*+TXV	A*VC80805C*B*	33,400	26,720	15.5	12.5	5325876
	CA*F3642*6D*+TXV	A*VC81005C*B*	33,400	26,720	15.5	12.5	5325908
	CA*F3642*6D*+TXV	A*VC950704CXA*	33,400	26,720	15.5	12.5	5325942
	CA*F3642*6D*+TXV	A*VC950905CXA*	33,400	26,720	15.5	12.5	5325974
	CA*F3642*6D*+TXV	A*VC950905DXA*	33,400	26,720	15.5	12.5	5326006
	CA*F3642*6D*+TXV	A*VC951155DXA*	33,400	26,720	15.5	12.5	5326036
	CA*F3642*6D*+TXV	A*VM960604CXA*	33,400	26,720	14.5	12.0	5326066
	CA*F3642*6D*+TXV	A*VM960805CXA*	33,400	26,720	15.5	12.5	5326100
	CA*F3642*6D*+TXV	A*VM960805DXA*	33,400	26,720	15.5	12.5	5326129
	CA*F3642*6D*+TXV	A*VM961005DXA*	33,400	26,720	15.5	12.5	5326159
	CA*F3642*6D*+TXV	A*VM961155DXA*	33,400	26,720	15.5	12.5	5326190
	CA*F3642*6D*+TXV	ADV80805C*B*	33,400	26,720	15.5	12.5	5326218
	CA*F3642*6D*+TXV	ADV81005C*B*	33,400	26,720	15.5	12.5	5326235
	CA*F3642*6D*+TXV	G*E80603B*B*	33,400	26,720	15.1	12.5	5326291
	CA*F3642*6D*+TXV	G*E80805C*B*	33,400	26,720	15.5	12.5	5325830
	CA*F3642*6D*+TXV	G*E81005C*B*	33,400	26,720	15.5	12.5	5326297
	CA*F3642*6D*+TXV	G*VC80604B*B*	33,400	26,720	15.5	12.5	5325858
	CA*F3642*6D*+TXV	G*VC80805C*B*	33,400	26,720	15.5	12.5	5325877
	CA*F3642*6D*+TXV	G*VC81005C*B*	33,400	26,720	15.5	12.5	5325909
	CA*F3642*6D*+TXV	G*VC950704CXA*	33,400	26,720	15.5	12.5	5325943
	CA*F3642*6D*+TXV	G*VC950905CXA*	33,400	26,720	15.5	12.5	5325975
	CA*F3642*6D*+TXV	G*VC950905DXA*	33,400	26,720	15.5	12.5	5326007
	CA*F3642*6D*+TXV	G*VC951155DXA*	33,400	26,720	15.5	12.5	5326037
	CA*F3642*6D*+TXV	G*VM960604CXA*	33,400	26,720	14.5	12.0	5326067
	CA*F3642*6D*+TXV	G*VM960805CXA*	33,400	26,720	15.5	12.5	5326101
	CA*F3642*6D*+TXV	G*VM960805DXA*	33,400	26,720	15.5	12.5	5326130
	CA*F3642*6D*+TXV	G*VM961005DXA*	33,400	26,720	15.5	12.5	5326160
	CA*F3642*6D*+TXV	G*VM961155DXA*	33,400	26,720	15.5	12.5	5326191
	CA*F3642*6D*+TXV	GME950603BXA*	33,400	26,720	14.5	12.0	5326252
	CA*F3642*6D*+TXV	GME950805CXA*	33,400	26,720	14.5	12.0	5326262
	CA*F3642*6D*+TXV	GME951005DXA*	33,400	26,720	15.5	12.5	5326279
	CA*F3743*6D*	A*VC80604B*B*	33,600	26,880	15.5	12.5	5325859
	CA*F3743*6D*	A*VC80805C*B*	33,800	27,040	15.5	12.5	5325878
	CA*F3743*6D*	A*VC81005C*B*	33,600	26,880	15.5	12.5	5325910
	CA*F3743*6D*	A*VC950704CXA*	33,600	26,880	15.5	12.5	5325944
CA*F3743*6D*	A*VC950905CXA*	33,600	26,880	15.5	12.5	5325976	
CA*F3743*6D*	A*VC950905DXA*	33,600	26,880	15.5	12.5	5326008	
CA*F3743*6D*	A*VC951155DXA*	34,000	27,200	15.5	12.5	5326038	
CA*F3743*6D*	A*VM960604CXA*	34,000	27,200	15.0	12.5	5326068	
CA*F3743*6D*	A*VM960805CXA*	33,600	26,880	15.5	12.5	5326102	
CA*F3743*6D*	A*VM960805DXA*	33,600	26,880	15.5	12.5	5326131	
CA*F3743*6D*	A*VM961005DXA*	34,000	27,200	15.5	12.5	5326161	
CA*F3743*6D*	A*VM961155DXA*	34,000	27,200	15.5	12.5	5326192	
CA*F3743*6D*	ADV80805C*B*	33,600	26,880	15.5	12.5	5326219	
CA*F3743*6D*	ADV81005C*B*	33,600	26,880	15.5	12.5	5326236	

See Notes on Page 26.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #	
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>		
SSX16 0361B* (cont.)	CA*F3743*6D*	G*E80603B*B*	33,600	26,880	15.0	12.5	5325823	
	CA*F3743*6D*	G*E80805C*B*	33,600	26,880	15.5	12.5	5325831	
	CA*F3743*6D*	G*E81005C*B*	33,600	26,880	15.5	12.5	5326298	
	CA*F3743*6D*	G*VC80604B*B*	33,600	26,880	15.5	12.5	5325860	
	CA*F3743*6D*	G*VC80805C*B*	33,800	27,040	15.5	12.5	5325879	
	CA*F3743*6D*	G*VC81005C*B*	33,600	26,880	15.5	12.5	5325911	
	CA*F3743*6D*	G*VC950704CXA*	33,600	26,880	15.5	12.5	5325945	
	CA*F3743*6D*	G*VC950905CXA*	33,600	26,880	15.5	12.5	5325977	
	CA*F3743*6D*	G*VC950905DXA*	33,600	26,880	15.5	12.5	5326009	
	CA*F3743*6D*	G*VC951155DXA*	34,000	27,200	15.5	12.5	5326039	
	CA*F3743*6D*	G*VM960604CXA*	34,000	27,200	15.0	12.5	5326069	
	CA*F3743*6D*	G*VM960805CXA*	33,600	26,880	15.5	12.5	5326103	
	CA*F3743*6D*	G*VM960805DXA*	33,600	26,880	15.5	12.5	5326132	
	CA*F3743*6D*	G*VM961005DXA*	34,000	27,200	15.5	12.5	5326162	
	CA*F3743*6D*	G*VM961155DXA*	34,000	27,200	15.5	12.5	5326193	
	CA*F3743*6D*	GME950603BXA*	33,600	26,880	14.5	12.0	5326253	
	CA*F3743*6D*	GME950805CXA*	33,600	26,880	15.0	12.5	5326263	
	CA*F3743*6D*	GME951005DXA*	33,600	26,880	15.5	12.5	5326280	
	CA*F3743*6D*+EEP			34,000	27,200	14.5	12.0	5325790
	CA*F3743*6D*+EEP+TXV			34,000	27,200	14.5	12.0	5325791
	CA*F3743*6D*+MBVC1600**-1A*			33,600	26,880	16.0	13.0	5325792
	CA*F3743*6D*+MBVC1600**-1A*+TXV			33,600	26,880	16.0	13.0	5325793
	CA*F3743*6D*+MBVC2000**-1A*			34,000	27,200	16.0	13.0	5326908
	CA*F3743*6D*+MBVC2000**-1A*+TXV			34,000	27,200	16.0	13.0	5325794
	CA*F3743*6D*+TXV	A*VC80604B*B*	33,600	26,880	15.5	12.5	5325861	
	CA*F3743*6D*+TXV	A*VC80805C*B*	33,800	27,040	15.5	12.5	5325880	
	CA*F3743*6D*+TXV	A*VC81005C*B*	33,600	26,880	15.5	12.5	5325912	
	CA*F3743*6D*+TXV	A*VC950704CXA*	33,600	26,880	15.5	12.5	5325946	
	CA*F3743*6D*+TXV	A*VC950905CXA*	33,600	26,880	15.5	12.5	5325978	
	CA*F3743*6D*+TXV	A*VC950905DXA*	33,600	26,880	16.0	13.0	5326010	
	CA*F3743*6D*+TXV	A*VC951155DXA*	34,000	27,200	16.0	13.0	5326040	
	CA*F3743*6D*+TXV	A*VM960604CXA*	34,000	27,200	15.0	12.5	5326070	
	CA*F3743*6D*+TXV	A*VM960805CXA*	33,600	26,880	15.5	12.5	5326104	
	CA*F3743*6D*+TXV	A*VM960805DXA*	33,600	26,880	16.0	13.0	5326315	
	CA*F3743*6D*+TXV	A*VM961005DXA*	34,000	27,200	16.0	13.0	5326163	
	CA*F3743*6D*+TXV	A*VM961155DXA*	34,000	27,200	16.0	13.0	5326194	
	CA*F3743*6D*+TXV	ADVC80805C*B*	33,600	26,880	15.5	12.5	5326220	
	CA*F3743*6D*+TXV	ADVC81005C*B*	33,600	26,880	15.5	12.5	5326237	
	CA*F3743*6D*+TXV	G*E80603B*B*	33,600	26,880	15.1	12.5	5326292	
	CA*F3743*6D*+TXV	G*E80805C*B*	33,600	26,880	15.5	12.5	5325832	
	CA*F3743*6D*+TXV	G*E81005C*B*	33,600	26,880	15.5	12.5	5325844	
	CA*F3743*6D*+TXV	G*VC80604B*B*	33,600	26,880	15.5	12.5	5325862	
CA*F3743*6D*+TXV	G*VC80805C*B*	33,800	27,040	15.5	12.5	5325881		
CA*F3743*6D*+TXV	G*VC81005C*B*	33,600	26,880	15.5	12.5	5325913		
CA*F3743*6D*+TXV	G*VC950704CXA*	33,600	26,880	15.5	12.5	5325947		
CA*F3743*6D*+TXV	G*VC950905CXA*	33,600	26,880	15.5	12.5	5325979		
CA*F3743*6D*+TXV	G*VC950905DXA*	33,600	26,880	16.0	13.0	5326011		
CA*F3743*6D*+TXV	G*VC951155DXA*	34,000	27,200	16.0	13.0	5326041		
CA*F3743*6D*+TXV	G*VM960604CXA*	34,000	27,200	15.0	12.5	5326071		
CA*F3743*6D*+TXV	G*VM960805CXA*	33,600	26,880	15.5	12.5	5326105		
CA*F3743*6D*+TXV	G*VM960805DXA*	33,600	26,880	16.0	13.0	5326316		
CA*F3743*6D*+TXV	G*VM961005DXA*	34,000	27,200	16.0	13.0	5326164		

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CA*F3743*6D*+TXV	G*VM961155DXA*	34,000	27,200	16.0	13.0	5326195
	CA*F3743*6D*+TXV	GME950603BXA*	33,600	26,880	14.5	12.0	5326254
	CA*F3743*6D*+TXV	GME950805CXA*	33,600	26,880	15.0	12.5	5326264
	CA*F3743*6D*+TXV	GME951005DXA*	33,600	26,880	15.5	12.5	5326281
	CA*F4860*6D*	A*VC80604B*B*	33,600	26,880	15.5	12.5	5325863
	CA*F4860*6D*	A*VC80805C*B*	34,000	27,200	15.5	12.5	5325882
	CA*F4860*6D*	A*VC81005C*B*	33,800	27,040	15.5	12.5	5325914
	CA*F4860*6D*	A*VC950704CXA*	34,000	27,200	15.5	12.5	5325948
	CA*F4860*6D*	A*VC950905CXA*	34,000	27,200	15.5	12.5	5325980
	CA*F4860*6D*	A*VC950905DXA*	34,000	27,200	15.5	12.5	5326012
	CA*F4860*6D*	A*VC951155DXA*	34,000	27,200	15.5	12.5	5326042
	CA*F4860*6D*	A*VM960604CXA*	34,000	27,200	15.0	12.5	5326072
	CA*F4860*6D*	A*VM960805CXA*	34,000	27,200	15.5	12.5	5326106
	CA*F4860*6D*	A*VM960805DXA*	34,000	27,200	15.5	12.5	5326133
	CA*F4860*6D*	A*VM961005DXA*	34,000	27,200	15.5	12.5	5326165
	CA*F4860*6D*	A*VM961155DXA*	34,000	27,200	15.5	12.5	5326196
	CA*F4860*6D*	ADV80805C*B*	33,800	27,040	15.5	12.5	5326221
	CA*F4860*6D*	ADV81005C*B*	33,600	26,880	15.5	12.5	5326238
	CA*F4860*6D*	G*E80603B*B*	34,000	27,200	15.0	12.5	5325824
	CA*F4860*6D*	G*E80805C*B*	34,000	27,200	15.5	12.5	5325833
	CA*F4860*6D*	G*E81005C*B*	34,000	27,200	15.5	12.5	5326299
	CA*F4860*6D*	G*VC80604B*B*	33,600	26,880	15.5	12.5	5325864
	CA*F4860*6D*	G*VC80805C*B*	34,000	27,200	15.5	12.5	5325883
	CA*F4860*6D*	G*VC81005C*B*	33,800	27,040	15.5	12.5	5325915
	CA*F4860*6D*	G*VC950704CXA*	34,000	27,200	15.5	12.5	5325949
	CA*F4860*6D*	G*VC950905CXA*	34,000	27,200	15.5	12.5	5325981
	CA*F4860*6D*	G*VC950905DXA*	34,000	27,200	15.5	12.5	5326013
	CA*F4860*6D*	G*VC951155DXA*	34,000	27,200	15.5	12.5	5326043
	CA*F4860*6D*	G*VM960604CXA*	34,000	27,200	15.0	12.5	5326073
	CA*F4860*6D*	G*VM960805CXA*	34,000	27,200	15.5	12.5	5326107
	CA*F4860*6D*	G*VM960805DXA*	34,000	27,200	15.5	12.5	5326134
	CA*F4860*6D*	G*VM961005DXA*	34,000	27,200	15.5	12.5	5326166
	CA*F4860*6D*	G*VM961155DXA*	34,000	27,200	15.5	12.5	5326197
	CA*F4860*6D*	GME950603BXA*	33,600	26,880	14.5	12.0	5326255
	CA*F4860*6D*	GME950805CXA*	34,000	27,200	15.0	12.5	5326265
	CA*F4860*6D*	GME951005DXA*	34,000	27,200	15.5	12.5	5326282
	CA*F4860*6D*+EEP		34,000	27,200	14.5	12.0	5325795
	CA*F4860*6D*+EEP+TXV		34,000	27,200	14.5	12.0	4214565
	CA*F4860*6D*+MBVC1600**-1A*		34,000	27,200	16.0	13.0	5325796
	CA*F4860*6D*+MBVC1600**-1A*+TXV		34,000	27,200	16.0	13.0	3880320
	CA*F4860*6D*+MBVC2000**-1A*		34,000	27,200	16.0	13.0	5325797
	CA*F4860*6D*+MBVC2000**-1A*+TXV		34,000	27,200	16.0	13.0	3880343
CA*F4860*6D*+TXV	A*VC80604B*B*	34,000	27,200	15.5	12.5	5038994	
CA*F4860*6D*+TXV	A*VC80805C*B*	34,000	27,200	16.0	13.0	5039185	
CA*F4860*6D*+TXV	A*VC81005C*B*	33,800	27,040	15.5	12.5	5038888	
CA*F4860*6D*+TXV	A*VC950704CXA*	34,000	27,200	15.5	12.5	3880526	
CA*F4860*6D*+TXV	A*VC950714CXA*	34,000	27,200	15.5	13.0	4202020	
CA*F4860*6D*+TXV	A*VC950905CXA*	34,000	27,200	15.5	12.5	4201393	
CA*F4860*6D*+TXV	A*VC950905DXA*	34,000	27,200	16.0	13.0	3880527	
CA*F4860*6D*+TXV	A*VC950915DXA*	35,000	28,000	16.0	13.2	4202030	
CA*F4860*6D*+TXV	A*VC951155DXA*	34,000	27,200	16.0	13.0	3880528	
CA*F4860*6D*+TXV	A*VM960604CXA*	34,000	27,200	14.5	12.0	4652436	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CA*F4860*6D*+TXV	A*VM960805CXA*	34,000	27,200	15.5	12.5	4652596
	CA*F4860*6D*+TXV	A*VM960805DXA*	34,000	27,200	16.0	13.0	4652706
	CA*F4860*6D*+TXV	A*VM961005DXA*	34,000	27,200	16.0	13.0	4652629
	CA*F4860*6D*+TXV	A*VM961155DXA*	34,000	27,200	16.0	13.0	4652609
	CA*F4860*6D*+TXV	ADVC80805C*B*	33,800	27,040	16.0	13.0	5039082
	CA*F4860*6D*+TXV	ADVC81005C*B*	33,800	27,040	16.0	13.0	5039191
	CA*F4860*6D*+TXV	G*E80603B*B*	34,000	27,200	15.5	12.5	5039021
	CA*F4860*6D*+TXV	G*E80805C*B*	34,000	27,200	16.0	13.0	5038876
	CA*F4860*6D*+TXV	G*E81005C*B*	34,000	27,200	16.0	13.0	5039058
	CA*F4860*6D*+TXV	G*VC80604B*B*	34,000	27,200	15.5	12.5	5038858
	CA*F4860*6D*+TXV	G*VC80805C*B*	34,000	27,200	16.0	13.0	5039209
	CA*F4860*6D*+TXV	G*VC81005C*B*	33,800	27,040	15.5	12.5	5039258
	CA*F4860*6D*+TXV	G*VC91155DXA*	34,800	27,840	16.0	13.2	3880541
	CA*F4860*6D*+TXV	G*VC950704CXA*	34,000	27,200	15.5	12.5	3880542
	CA*F4860*6D*+TXV	G*VC950714CXA*	34,000	27,200	15.5	13.0	4202021
	CA*F4860*6D*+TXV	G*VC950905CXA*	34,000	27,200	15.5	12.5	4201394
	CA*F4860*6D*+TXV	G*VC950905DXA*	34,000	27,200	16.0	13.0	3880543
	CA*F4860*6D*+TXV	G*VC950915DXA*	35,000	28,000	16.0	13.2	4202031
	CA*F4860*6D*+TXV	G*VC951155DXA*	34,000	27,200	16.0	13.0	3880544
	CA*F4860*6D*+TXV	G*VM960604CXA*	34,000	27,200	14.5	12.0	4652437
	CA*F4860*6D*+TXV	G*VM960805CXA*	34,000	27,200	15.5	12.5	4652597
	CA*F4860*6D*+TXV	G*VM960805DXA*	34,000	27,200	16.0	13.0	4652707
	CA*F4860*6D*+TXV	G*VM961005DXA*	34,000	27,200	16.0	13.0	4652628
	CA*F4860*6D*+TXV	G*VM961155DXA*	34,000	27,200	16.0	13.0	4652608
	CA*F4860*6D*+TXV	GME950603BXA*	33,600	26,880	14.5	12.0	4703709
	CA*F4860*6D*+TXV	GME950805CXA*	34,000	27,200	15.0	12.5	4701089
	CA*F4860*6D*+TXV	GME951005DXA*	34,000	27,200	15.5	12.5	4701092
	CA*F4961*6D*	A*VC80604B*B*	33,800	27,040	16.0	13.0	5325865
	CA*F4961*6D*	A*VC80805C*B*	34,200	27,360	16.0	13.0	5325884
	CA*F4961*6D*	A*VC81005C*B*	33,800	27,040	16.0	13.0	5325916
	CA*F4961*6D*	A*VC950704CXA*	34,200	27,360	16.0	13.0	5325950
	CA*F4961*6D*	A*VC950905CXA*	34,200	27,360	16.0	13.0	5325982
	CA*F4961*6D*	A*VC950905DXA*	34,200	27,360	16.0	13.0	5326014
	CA*F4961*6D*	A*VC951155DXA*	34,200	27,360	16.0	13.0	5326044
	CA*F4961*6D*	A*VM960604CXA*	34,200	27,360	15.0	12.5	5326074
	CA*F4961*6D*	A*VM960805CXA*	34,200	27,360	16.0	13.0	5326108
	CA*F4961*6D*	A*VM960805DXA*	34,200	27,360	16.0	13.0	5326135
	CA*F4961*6D*	A*VM961005DXA*	34,200	27,360	16.0	13.0	5326167
	CA*F4961*6D*	A*VM961155DXA*	34,200	27,360	16.0	13.0	5326198
	CA*F4961*6D*	ADVC80805C*B*	33,800	27,040	16.0	13.0	5326222
	CA*F4961*6D*	ADVC81005C*B*	33,800	27,040	16.0	13.0	5326239
	CA*F4961*6D*	G*E80603B*B*	34,200	27,360	15.5	12.5	5325825
CA*F4961*6D*	G*E80805C*B*	34,000	27,200	16.0	13.0	5325834	
CA*F4961*6D*	G*E81005C*B*	34,000	27,200	16.0	13.0	5326300	
CA*F4961*6D*	G*VC80604B*B*	33,800	27,040	16.0	13.0	5325866	
CA*F4961*6D*	G*VC80805C*B*	34,200	27,360	16.0	13.0	5325885	
CA*F4961*6D*	G*VC81005C*B*	33,800	27,040	16.0	13.0	5325917	
CA*F4961*6D*	G*VC950704CXA*	34,200	27,360	16.0	13.0	5325951	
CA*F4961*6D*	G*VC950905CXA*	34,200	27,360	16.0	13.0	5325983	
CA*F4961*6D*	G*VC950905DXA*	34,200	27,360	16.0	13.0	5326015	
CA*F4961*6D*	G*VC951155DXA*	34,200	27,360	16.0	13.0	5326045	
CA*F4961*6D*	G*VM960604CXA*	34,200	27,360	15.0	12.5	5326075	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CA*F4961*6D*	G*VM960805CXA*	34,200	27,360	16.0	13.0	5326109
	CA*F4961*6D*	G*VM960805DXA*	34,200	27,360	16.0	13.0	5326136
	CA*F4961*6D*	G*VM961005DXA*	34,200	27,360	16.0	13.0	5326168
	CA*F4961*6D*	G*VM961155DXA*	34,200	27,360	16.0	13.0	5326199
	CA*F4961*6D*	GME950603BXA*	33,800	27,040	15.0	12.5	5326256
	CA*F4961*6D*	GME950805CXA*	34,200	27,360	15.0	12.5	5326266
	CA*F4961*6D*	GME951005DXA*	34,200	27,360	16.0	13.0	5326283
	CA*F4961*6D*+EEP		34,200	27,360	14.5	12.0	5338940
	CA*F4961*6D*+EEP+TXV		34,000	27,200	14.5	12.0	4940533
	CA*F4961*6D*+MBVC1600**-1A*		34,200	27,360	16.0	13.0	5325798
	CA*F4961*6D*+MBVC1600**-1A*+TXV		34,200	27,360	16.0	13.0	5325799
	CA*F4961*6D*+MBVC2000**-1A*		34,200	27,360	16.0	13.0	5325800
	CA*F4961*6D*+MBVC2000**-1A*+TXV		34,200	27,360	16.0	13.0	5325801
	CA*F4961*6D*+TXV	A*VC80604B*B*	33,800	27,040	16.0	13.0	5038842
	CA*F4961*6D*+TXV	A*VC80805C*B*	34,200	27,360	16.0	13.0	5038898
	CA*F4961*6D*+TXV	A*VC81005C*B*	33,800	27,040	16.0	13.0	5039023
	CA*F4961*6D*+TXV	A*VC950704CXA*	34,200	27,360	16.0	13.0	4431767
	CA*F4961*6D*+TXV	A*VC950714CXA*	34,000	27,200	15.5	13.0	4431768
	CA*F4961*6D*+TXV	A*VC950905CXA*	34,200	27,360	16.0	13.0	4431769
	CA*F4961*6D*+TXV	A*VC950905DXA*	34,200	27,360	16.0	13.0	5326016
	CA*F4961*6D*+TXV	A*VC951155DXA*	34,200	27,360	16.0	13.0	5326046
	CA*F4961*6D*+TXV	A*VM960604CXA*	34,200	27,360	15.0	12.5	4652441
	CA*F4961*6D*+TXV	A*VM960805CXA*	34,200	27,360	16.0	13.0	4652600
	CA*F4961*6D*+TXV	A*VM960805DXA*	34,200	27,360	16.0	13.0	5326137
	CA*F4961*6D*+TXV	A*VM961005DXA*	34,200	27,360	16.0	13.0	5326169
	CA*F4961*6D*+TXV	A*VM961155DXA*	34,200	27,360	16.0	13.0	5326200
	CA*F4961*6D*+TXV	ADVC80805C*B*	33,800	27,040	16.0	13.0	5039270
	CA*F4961*6D*+TXV	ADVC81005C*B*	33,800	27,040	16.0	13.0	5038906
	CA*F4961*6D*+TXV	G*E80603B*B*	34,200	27,360	15.5	12.5	5039192
	CA*F4961*6D*+TXV	G*E80805C*B*	34,000	27,200	16.0	13.0	5039171
	CA*F4961*6D*+TXV	G*E81005C*B*	34,000	27,200	16.0	13.0	5039177
	CA*F4961*6D*+TXV	G*VC80604B*B*	33,800	27,040	16.0	13.0	5038840
	CA*F4961*6D*+TXV	G*VC80805C*B*	34,200	27,360	16.0	13.0	5039210
	CA*F4961*6D*+TXV	G*VC81005C*B*	33,800	27,040	16.0	13.0	5038977
	CA*F4961*6D*+TXV	G*VC950704CXA*	34,200	27,360	16.0	13.0	4431777
	CA*F4961*6D*+TXV	G*VC950714CXA*	34,000	27,200	15.5	13.0	4431778
	CA*F4961*6D*+TXV	G*VC950905CXA*	34,200	27,360	16.0	13.0	4431779
	CA*F4961*6D*+TXV	G*VC950905DXA*	34,200	27,360	16.0	13.0	4431780
	CA*F4961*6D*+TXV	G*VC951155DXA*	34,200	27,360	16.0	13.0	4431781
	CA*F4961*6D*+TXV	G*VM960604CXA*	34,200	27,360	15.0	12.5	4652440
	CA*F4961*6D*+TXV	G*VM960805CXA*	34,200	27,360	16.0	13.0	4652601
	CA*F4961*6D*+TXV	G*VM960805DXA*	34,200	27,360	16.0	13.0	5326138
	CA*F4961*6D*+TXV	G*VM961005DXA*	34,200	27,360	16.0	13.0	4652595
	CA*F4961*6D*+TXV	G*VM961155DXA*	34,200	27,360	16.0	13.0	4652593
	CA*F4961*6D*+TXV	GME950603BXA*	33,800	27,040	15.0	12.5	4703711
	CA*F4961*6D*+TXV	GME950805CXA*	34,200	27,360	15.0	12.5	4701094
	CA*F4961*6D*+TXV	GME951005DXA*	34,200	27,360	16.0	13.0	4701098
	CHPF3743C6B*	A*VC80604B*B*	33,600	26,880	15.5	12.5	5325867
	CHPF3743C6B*	A*VC80805C*B*	33,600	26,880	15.5	12.5	5325886
	CHPF3743C6B*	A*VC81005C*B*	33,600	26,880	15.5	12.5	5325918
CHPF3743C6B*	A*VC950704CXA*	33,600	26,880	15.5	12.5	5326307	
CHPF3743C6B*	A*VC950905CXA*	33,600	26,880	15.5	12.5	5325984	

See Notes on Page 26.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CHPF3743C6B*	A*VM960604CXA*	34,000	27,200	14.5	12.0	5326076
	CHPF3743C6B*	A*VM960805CXA*	33,600	26,880	15.5	12.5	5326310
	CHPF3743C6B*	ADVC80805C*B*	33,600	26,880	15.5	12.5	5326223
	CHPF3743C6B*	ADVC81005C*B*	33,600	26,880	15.5	12.5	5326240
	CHPF3743C6B*	G*E80603B*B*	33,600	26,880	15.0	12.5	5325826
	CHPF3743C6B*	G*E80805C*B*	33,600	26,880	15.5	12.5	5325835
	CHPF3743C6B*	G*E81005C*B*	33,600	26,880	15.5	12.5	5325845
	CHPF3743C6B*	G*VC80604B*B*	33,600	26,880	15.5	12.5	5325868
	CHPF3743C6B*	G*VC80805C*B*	33,600	26,880	15.5	12.5	5325887
	CHPF3743C6B*	G*VC81005C*B*	33,600	26,880	15.5	12.5	5325919
	CHPF3743C6B*	G*VC950704CXA*	33,600	26,880	15.5	12.5	5326308
	CHPF3743C6B*	G*VC950905CXA*	33,600	26,880	15.5	12.5	5325985
	CHPF3743C6B*	G*VM960604CXA*	34,000	27,200	14.5	12.0	5326077
	CHPF3743C6B*	G*VM960805CXA*	33,600	26,880	15.5	12.5	5326110
	CHPF3743C6B*	GME950603BXA*	33,600	26,880	14.5	12.0	5326257
	CHPF3743C6B*	GME950805CXA*	33,600	26,880	14.5	12.0	5326267
	CHPF3743C6B*+EEP		34,000	27,200	14.5	12.0	5326909
	CHPF3743C6B*+EEP+TXV		34,000	27,200	14.5	12.0	5325802
	CHPF3743C6B*+MBVC1600**-1A*		33,600	26,880	16.0	13.0	5325803
	CHPF3743C6B*+MBVC1600**-1A*+TXV		33,600	26,880	16.0	13.0	5325804
	CHPF3743C6B*+MBVC2000**-1A*		34,000	27,200	16.0	13.0	5326910
	CHPF3743C6B*+MBVC2000**-1A*+TXV		34,000	27,200	16.0	13.0	5325805
	CHPF3743C6B*+TXV	A*VC80604B*B*	33,600	26,880	16.0	13.0	5325869
	CHPF3743C6B*+TXV	A*VC80805C*B*	33,600	26,880	15.5	12.5	5325888
	CHPF3743C6B*+TXV	A*VC81005C*B*	33,600	26,880	15.5	12.5	5325920
	CHPF3743C6B*+TXV	A*VC950704CXA*	33,600	26,880	15.5	12.5	5325952
	CHPF3743C6B*+TXV	A*VC950905CXA*	33,600	26,880	15.5	12.5	5325986
	CHPF3743C6B*+TXV	A*VM960604CXA*	34,000	27,200	14.5	12.0	5326078
	CHPF3743C6B*+TXV	A*VM960805CXA*	33,600	26,880	15.5	12.5	5326111
	CHPF3743C6B*+TXV	ADVC80805C*B*	33,600	26,880	15.5	12.5	5326224
	CHPF3743C6B*+TXV	ADVC81005C*B*	33,600	26,880	15.5	12.5	5326241
	CHPF3743C6B*+TXV	G*E80603B*B*	33,600	26,880	15.1	12.5	5326293
	CHPF3743C6B*+TXV	G*E80805C*B*	33,600	26,880	15.5	12.5	5325836
	CHPF3743C6B*+TXV	G*E81005C*B*	33,600	26,880	15.5	12.5	5325846
	CHPF3743C6B*+TXV	G*VC80604B*B*	33,600	26,880	16.0	13.0	5325870
	CHPF3743C6B*+TXV	G*VC80805C*B*	33,600	26,880	15.5	12.5	5325889
	CHPF3743C6B*+TXV	G*VC81005C*B*	33,600	26,880	15.5	12.5	5325921
	CHPF3743C6B*+TXV	G*VC950704CXA*	33,600	26,880	15.5	12.5	5325953
	CHPF3743C6B*+TXV	G*VC950905CXA*	33,600	26,880	15.5	12.5	5325987
	CHPF3743C6B*+TXV	G*VM960604CXA*	34,000	27,200	14.5	12.0	5326079
	CHPF3743C6B*+TXV	G*VM960805CXA*	33,600	26,880	15.5	12.5	5326112
	CHPF3743C6B*+TXV	GME950603BXA*	33,600	26,880	14.5	12.0	5326258
	CHPF3743C6B*+TXV	GME950805CXA*	33,600	26,880	14.5	12.0	5326268
	CHPF3743D6B*	A*VC80805C*B*	33,800	27,040	15.5	12.5	5325890
	CHPF3743D6B*	A*VC81005C*B*	33,600	26,880	15.5	12.5	5325922
	CHPF3743D6B*	A*VC950704CXA*	33,600	26,880	15.5	12.5	5325954
	CHPF3743D6B*	A*VC950905CXA*	33,600	26,880	15.5	12.5	5325988
	CHPF3743D6B*	A*VC950905DXA*	33,600	26,880	15.5	12.5	5326017
	CHPF3743D6B*	A*VC951155DXA*	34,000	27,200	15.5	12.5	5326047
	CHPF3743D6B*	A*VM960604CXA*	34,000	27,200	14.5	12.0	5326080
	CHPF3743D6B*	A*VM960805CXA*	33,600	26,880	15.5	12.5	5326113
	CHPF3743D6B*	A*VM960805DXA*	33,600	26,880	15.5	12.5	5326139

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CHPF3743D6B*	A*VM961005DXA*	34,000	27,200	15.5	12.5	5326170
	CHPF3743D6B*	A*VM961155DXA*	34,000	27,200	15.5	12.5	5326201
	CHPF3743D6B*	ADVC80805C*B*	33,600	26,880	15.5	12.5	5326225
	CHPF3743D6B*	ADVC81005C*B*	33,600	26,880	15.5	12.5	5326242
	CHPF3743D6B*	G*E80805C*B*	33,600	26,880	15.5	12.5	5325837
	CHPF3743D6B*	G*E81005C*B*	33,600	26,880	15.5	12.5	5326301
	CHPF3743D6B*	G*VC80805C*B*	33,800	27,040	15.5	12.5	5325891
	CHPF3743D6B*	G*VC81005C*B*	33,600	26,880	15.5	12.5	5325923
	CHPF3743D6B*	G*VC950704CXA*	33,600	26,880	15.5	12.5	5325955
	CHPF3743D6B*	G*VC950905CXA*	33,600	26,880	15.5	12.5	5325989
	CHPF3743D6B*	G*VC950905DXA*	33,600	26,880	15.5	12.5	5326018
	CHPF3743D6B*	G*VC951155DXA*	34,000	27,200	15.5	12.5	5326048
	CHPF3743D6B*	G*VM960604CXA*	34,000	27,200	14.5	12.0	5326081
	CHPF3743D6B*	G*VM960805CXA*	33,600	26,880	15.5	12.5	5326114
	CHPF3743D6B*	G*VM960805DXA*	33,600	26,880	15.5	12.5	5326140
	CHPF3743D6B*	G*VM961005DXA*	34,000	27,200	15.5	12.5	5326171
	CHPF3743D6B*	G*VM961155DXA*	34,000	27,200	15.5	12.5	5326202
	CHPF3743D6B*	GME950805CXA*	33,600	26,880	14.5	12.0	5326269
	CHPF3743D6B*	GME951005DXA*	33,600	26,880	15.5	12.5	5326284
	CHPF3743D6B*+MBVC1600**-1A*		33,600	26,880	16.0	13.0	5326911
	CHPF3743D6B*+MBVC1600**-1A*+TXV		33,600	26,880	16.0	13.0	5325806
	CHPF3743D6B*+MBVC2000**-1A*		34,000	27,200	16.0	13.0	5326912
	CHPF3743D6B*+MBVC2000**-1A*+TXV		34,000	27,200	16.0	13.0	5325807
	CHPF3743D6B*+TXV	A*VC80805C*B*	33,800	27,040	15.5	12.5	5325892
	CHPF3743D6B*+TXV	A*VC81005C*B*	33,600	26,880	15.5	12.5	5325924
	CHPF3743D6B*+TXV	A*VC950704CXA*	33,600	26,880	15.5	12.5	5325956
	CHPF3743D6B*+TXV	A*VC950905CXA*	33,600	26,880	15.5	12.5	5325990
	CHPF3743D6B*+TXV	A*VC950905DXA*	33,600	26,880	16.0	13.0	5326019
	CHPF3743D6B*+TXV	A*VC951155DXA*	34,000	27,200	16.0	13.0	5326049
	CHPF3743D6B*+TXV	A*VM960604CXA*	34,000	27,200	14.5	12.0	5326082
	CHPF3743D6B*+TXV	A*VM960805CXA*	33,600	26,880	15.5	12.5	5326115
	CHPF3743D6B*+TXV	A*VM960805DXA*	33,600	26,880	16.0	13.0	5326141
	CHPF3743D6B*+TXV	A*VM961005DXA*	34,000	27,200	16.0	13.0	5326172
	CHPF3743D6B*+TXV	A*VM961155DXA*	34,000	27,200	16.0	13.0	5326203
	CHPF3743D6B*+TXV	ADVC80805C*B*	33,600	26,880	15.5	12.5	5326226
	CHPF3743D6B*+TXV	ADVC81005C*B*	33,600	26,880	15.5	12.5	5326243
	CHPF3743D6B*+TXV	G*E80805C*B*	33,600	26,880	15.5	12.5	5325838
	CHPF3743D6B*+TXV	G*E81005C*B*	33,600	26,880	15.5	12.5	5325847
	CHPF3743D6B*+TXV	G*VC80805C*B*	33,800	27,040	15.5	12.5	5325893
	CHPF3743D6B*+TXV	G*VC81005C*B*	33,600	26,880	15.5	12.5	5325925
	CHPF3743D6B*+TXV	G*VC950704CXA*	33,600	26,880	15.5	12.5	5325957
	CHPF3743D6B*+TXV	G*VC950905CXA*	33,600	26,880	15.5	12.5	5325991
	CHPF3743D6B*+TXV	G*VC950905DXA*	33,600	26,880	16.0	13.0	5326020
	CHPF3743D6B*+TXV	G*VC951155DXA*	34,000	27,200	16.0	13.0	5326050
	CHPF3743D6B*+TXV	G*VM960604CXA*	34,000	27,200	14.5	12.0	5326083
	CHPF3743D6B*+TXV	G*VM960805CXA*	33,600	26,880	15.5	12.5	5326116
	CHPF3743D6B*+TXV	G*VM960805DXA*	33,600	26,880	16.0	13.0	5326142
	CHPF3743D6B*+TXV	G*VM961005DXA*	34,000	27,200	16.0	13.0	5326173
CHPF3743D6B*+TXV	G*VM961155DXA*	34,000	27,200	16.0	13.0	5326204	
CHPF3743D6B*+TXV	GME950805CXA*	33,600	26,880	14.5	12.0	5326270	
CHPF3743D6B*+TXV	GME951005DXA*	33,600	26,880	15.5	12.5	5326285	
CHPF4860D6D*	A*VC80805C*B*	34,200	27,360	15.5	12.5	5325894	

See Notes on Page 52.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CHPF4860D6D*	A*VC81005C*B*	33,800	27,040	15.5	12.5	5325926
	CHPF4860D6D*	A*VC950704CXA*	34,200	27,360	15.5	12.5	5325958
	CHPF4860D6D*	A*VC950905CXA*	34,200	27,360	15.5	12.5	5325992
	CHPF4860D6D*	A*VC950905DXA*	34,200	27,360	15.5	12.5	5326021
	CHPF4860D6D*	A*VC951155DXA*	34,200	27,360	15.5	12.5	5326051
	CHPF4860D6D*	A*VM960604CXA*	34,200	27,360	15.0	12.5	5326084
	CHPF4860D6D*	A*VM960805CXA*	33,800	27,040	15.5	12.5	5326117
	CHPF4860D6D*	A*VM960805DXA*	33,800	27,040	15.5	12.5	5326143
	CHPF4860D6D*	A*VM961005DXA*	34,200	27,360	15.5	12.5	5326174
	CHPF4860D6D*	A*VM961155DXA*	34,200	27,360	15.5	12.5	5326205
	CHPF4860D6D*	ADVC80805C*B*	33,800	27,040	15.5	12.5	5326227
	CHPF4860D6D*	ADVC81005C*B*	33,800	27,040	15.5	12.5	5326244
	CHPF4860D6D*	G*E80805C*B*	34,000	27,200	15.5	12.5	5325839
	CHPF4860D6D*	G*E81005C*B*	34,000	27,200	15.5	12.5	5326302
	CHPF4860D6D*	G*VC80805C*B*	34,200	27,360	15.5	12.5	5325895
	CHPF4860D6D*	G*VC81005C*B*	33,800	27,040	15.5	12.5	5325927
	CHPF4860D6D*	G*VC950704CXA*	34,200	27,360	15.5	12.5	5325959
	CHPF4860D6D*	G*VC950905CXA*	34,200	27,360	15.5	12.5	5325993
	CHPF4860D6D*	G*VC950905DXA*	34,200	27,360	15.5	12.5	5326022
	CHPF4860D6D*	G*VC951155DXA*	34,200	27,360	15.5	12.5	5326052
	CHPF4860D6D*	G*VM960604CXA*	34,200	27,360	15.0	12.5	5326085
	CHPF4860D6D*	G*VM960805CXA*	33,800	27,040	15.5	12.5	5326118
	CHPF4860D6D*	G*VM960805DXA*	33,800	27,040	15.5	12.5	5326144
	CHPF4860D6D*	G*VM961005DXA*	34,200	27,360	15.5	12.5	5326175
	CHPF4860D6D*	G*VM961155DXA*	34,200	27,360	15.5	12.5	5326206
	CHPF4860D6D*	GME950805CXA*	34,200	27,360	15.0	12.5	5326271
	CHPF4860D6D*	GME951005DXA*	34,200	27,360	15.5	12.5	5326286
	CHPF4860D6D*+EEP		34,200	27,360	14.5	12.0	5338939
	CHPF4860D6D*+EEP+TXV		34,000	27,200	14.5	12.0	3586326
	CHPF4860D6D*+MBVC1600**-1A*		34,200	27,360	16.0	13.0	5325808
	CHPF4860D6D*+MBVC1600**-1A*+TXV		34,200	27,360	16.0	13.0	5325809
	CHPF4860D6D*+MBVC2000**-1A*		34,200	27,360	16.0	13.0	5325810
	CHPF4860D6D*+MBVC2000**-1A*+TXV		34,200	27,360	16.0	13.0	3609504
	CHPF4860D6D*+TXV	A*VC80604B*B*	34,400	27,520	15.5	12.7	5039042
	CHPF4860D6D*+TXV	A*VC80805C*B*	34,200	27,360	16.0	13.0	5038899
	CHPF4860D6D*+TXV	A*VC81005C*B*	33,800	27,040	16.0	13.0	5039065
	CHPF4860D6D*+TXV	A*VC950704CXA*	34,200	27,360	16.0	13.0	3635270
	CHPF4860D6D*+TXV	A*VC950905CXA*	34,200	27,360	16.0	13.0	4201399
	CHPF4860D6D*+TXV	A*VC950905DXA*	34,200	27,360	16.0	13.0	3850614
	CHPF4860D6D*+TXV	A*VC951155DXA*	34,200	27,360	16.0	13.0	3850613
	CHPF4860D6D*+TXV	A*VM960604CXA*	34,200	27,360	15.0	12.5	4652446
	CHPF4860D6D*+TXV	A*VM960805CXA*	34,200	27,360	16.0	13.0	4652658
	CHPF4860D6D*+TXV	A*VM960805DXA*	34,200	27,360	16.0	13.0	4652715
	CHPF4860D6D*+TXV	A*VM961005DXA*	34,200	27,360	16.0	13.0	4652638
	CHPF4860D6D*+TXV	A*VM961155DXA*	34,200	27,360	16.0	13.0	4652618
	CHPF4860D6D*+TXV	ADVC80805C*B*	33,800	27,040	16.0	13.0	5039083
	CHPF4860D6D*+TXV	ADVC81005C*B*	33,800	27,040	16.0	13.0	5039178
	CHPF4860D6D*+TXV	G*E80603B*B*	34,000	27,200	15.0	12.5	5038907
	CHPF4860D6D*+TXV	G*E80805C*B*	34,000	27,200	15.5	12.5	5039064
	CHPF4860D6D*+TXV	G*E81005C*B*	34,000	27,200	15.5	12.5	5039022
	CHPF4860D6D*+TXV	G*VC80604B*B*	34,400	27,520	15.5	12.7	5038841
	CHPF4860D6D*+TXV	G*VC80805C*B*	34,200	27,360	16.0	13.0	5038919

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CHPF4860D6D*+TXV	G*VC81005C*B*	33,800	27,040	16.0	13.0	5039193
	CHPF4860D6D*+TXV	G*VC950704CXA*	34,200	27,360	16.0	13.0	3598382
	CHPF4860D6D*+TXV	G*VC950905CXA*	34,200	27,360	16.0	13.0	4201398
	CHPF4860D6D*+TXV	G*VC950905DXA*	34,200	27,360	16.0	13.0	3598605
	CHPF4860D6D*+TXV	G*VC951155DXA*	34,200	27,360	16.0	13.0	3598840
	CHPF4860D6D*+TXV	G*VM960604CXA*	34,200	27,360	15.0	12.5	4652445
	CHPF4860D6D*+TXV	G*VM960805CXA*	34,200	27,360	16.0	13.0	4652659
	CHPF4860D6D*+TXV	G*VM960805DXA*	34,200	27,360	16.0	13.0	4652716
	CHPF4860D6D*+TXV	G*VM961005DXA*	34,200	27,360	16.0	13.0	4652637
	CHPF4860D6D*+TXV	G*VM961155DXA*	34,200	27,360	16.0	13.0	4652617
	CHPF4860D6D*+TXV	GME950603BXA*	34,000	27,200	15.0	12.5	4703713
	CHPF4860D6D*+TXV	GME950805CXA*	34,200	27,360	15.0	12.5	4701123
	CHPF4860D6D*+TXV	GME951005DXA*	34,200	27,360	16.0	13.0	4701126
	CSCF3642N6D*	A*VC80805C*B*	33,800	27,040	15.0	12.5	5325896
	CSCF3642N6D*	A*VC81005C*B*	33,600	26,880	15.0	12.5	5325928
	CSCF3642N6D*	A*VC950704CXA*	33,600	26,880	15.0	12.5	5325960
	CSCF3642N6D*	A*VC950905CXA*	33,600	26,880	15.0	12.5	5325994
	CSCF3642N6D*	A*VC950905DXA*	33,600	26,880	15.0	12.5	5326023
	CSCF3642N6D*	A*VC951155DXA*	33,600	26,880	15.0	12.5	5326053
	CSCF3642N6D*	A*VM960604CXA*	34,000	27,200	14.5	12.0	5326086
	CSCF3642N6D*	A*VM960805CXA*	33,600	26,880	15.0	12.5	5326119
	CSCF3642N6D*	A*VM960805DXA*	33,600	26,880	15.0	12.5	5326145
	CSCF3642N6D*	A*VM961005DXA*	34,000	27,200	15.0	12.5	5326176
	CSCF3642N6D*	A*VM961155DXA*	34,000	27,200	15.0	12.5	5326207
	CSCF3642N6D*	ADVC80805C*B*	33,600	26,880	15.0	12.5	5326228
	CSCF3642N6D*	ADVC81005C*B*	33,600	26,880	15.0	12.5	5326245
	CSCF3642N6D*	G*E80805C*B*	33,600	26,880	15.0	12.5	5325840
	CSCF3642N6D*	G*E81005C*B*	33,600	26,880	15.0	12.5	5325848
	CSCF3642N6D*	G*VC80805C*B*	33,800	27,040	15.0	12.5	5325897
	CSCF3642N6D*	G*VC81005C*B*	33,600	26,880	15.0	12.5	5325929
	CSCF3642N6D*	G*VC950704CXA*	33,600	26,880	15.0	12.5	5325961
	CSCF3642N6D*	G*VC950905CXA*	33,600	26,880	15.0	12.5	5325995
	CSCF3642N6D*	G*VC950905DXA*	33,600	26,880	15.0	12.5	5326024
	CSCF3642N6D*	G*VC951155DXA*	33,600	26,880	15.0	12.5	5326054
	CSCF3642N6D*	G*VM960604CXA*	34,000	27,200	14.5	12.0	5326087
	CSCF3642N6D*	G*VM960805CXA*	33,600	26,880	15.0	12.5	5326120
	CSCF3642N6D*	G*VM960805DXA*	33,600	26,880	15.0	12.5	5326146
	CSCF3642N6D*	G*VM961005DXA*	34,000	27,200	15.0	12.5	5326177
	CSCF3642N6D*	G*VM961155DXA*	34,000	27,200	15.0	12.5	5326208
	CSCF3642N6D*	GME950805CXA*	33,600	26,880	14.5	12.0	5326272
	CSCF3642N6D*	GME951005DXA*	33,600	26,880	15.0	12.5	5326287
	CSCF3642N6D*+EEP		34,000	27,200	14.5	12.0	5325811
	CSCF3642N6D*+EEP+TXV		34,000	27,200	14.5	12.0	5325812
	CSCF3642N6D*+MBVC1600**-1A*		33,600	26,880	15.5	12.5	5326913
	CSCF3642N6D*+MBVC1600**-1A*+TXV		33,600	26,880	15.5	12.5	5325813
	CSCF3642N6D*+MBVC2000**-1A*		34,000	27,200	15.5	12.5	5326914
	CSCF3642N6D*+MBVC2000**-1A*+TXV		34,000	27,200	15.5	12.5	5325814
	CSCF3642N6D*+TXV	A*VC80805C*B*	33,800	27,040	15.0	12.5	5325898
	CSCF3642N6D*+TXV	A*VC81005C*B*	33,600	26,880	15.1	12.5	5325930
	CSCF3642N6D*+TXV	A*VC950704CXA*	33,600	26,880	15.1	12.5	5325962
CSCF3642N6D*+TXV	A*VC950905CXA*	33,600	26,880	15.1	12.5	5326309	
CSCF3642N6D*+TXV	A*VC950905DXA*	33,600	26,880	15.1	12.5	5326025	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CSCF3642N6D*+TXV	A*VC951155DXA*	33,600	26,880	15.1	12.5	5326055
	CSCF3642N6D*+TXV	A*VM960604CXA*	34,000	27,200	14.5	12.0	5326088
	CSCF3642N6D*+TXV	A*VM960805CXA*	33,600	26,880	15.1	12.5	5326121
	CSCF3642N6D*+TXV	A*VM960805DXA*	33,600	26,880	15.1	12.5	5326147
	CSCF3642N6D*+TXV	A*VM961005DXA*	34,000	27,200	15.1	12.5	5326178
	CSCF3642N6D*+TXV	A*VM961155DXA*	34,000	27,200	15.1	12.5	5326209
	CSCF3642N6D*+TXV	ADVC80805C*B*	33,600	26,880	15.0	12.5	5326229
	CSCF3642N6D*+TXV	ADVC81005C*B*	33,600	26,880	15.0	12.5	5326246
	CSCF3642N6D*+TXV	G*E80805C*B*	33,600	26,880	15.0	12.5	5325841
	CSCF3642N6D*+TXV	G*E81005C*B*	33,600	26,880	15.0	12.5	5325849
	CSCF3642N6D*+TXV	G*VC80805C*B*	33,800	27,040	15.0	12.5	5325899
	CSCF3642N6D*+TXV	G*VC81005C*B*	33,600	26,880	15.1	12.5	5325931
	CSCF3642N6D*+TXV	G*VC950704CXA*	33,600	26,880	15.1	12.5	5325963
	CSCF3642N6D*+TXV	G*VC950905CXA*	33,600	26,880	15.1	12.5	5325996
	CSCF3642N6D*+TXV	G*VC950905DXA*	33,600	26,880	15.1	12.5	5326026
	CSCF3642N6D*+TXV	G*VC951155DXA*	33,600	26,880	15.1	12.5	5326056
	CSCF3642N6D*+TXV	G*VM960604CXA*	34,000	27,200	14.5	12.0	5326089
	CSCF3642N6D*+TXV	G*VM960805CXA*	33,600	26,880	15.1	12.5	5326122
	CSCF3642N6D*+TXV	G*VM960805DXA*	33,600	26,880	15.1	12.5	5326148
	CSCF3642N6D*+TXV	G*VM961005DXA*	34,000	27,200	15.1	12.5	5326179
	CSCF3642N6D*+TXV	G*VM961155DXA*	34,000	27,200	15.1	12.5	5326210
	CSCF3642N6D*+TXV	GME950805CXA*	33,600	26,880	14.5	12.0	5326273
	CSCF3642N6D*+TXV	GME951005DXA*	34,000	27,200	15.1	12.5	5326288
	CSCF4860N6D*	A*VC80805C*B*	33,800	27,040	15.0	12.5	5325900
	CSCF4860N6D*	A*VC81005C*B*	33,800	27,040	15.1	12.5	5325932
	CSCF4860N6D*	A*VC950704CXA*	34,200	27,360	15.1	12.5	5325964
	CSCF4860N6D*	A*VC950905CXA*	34,200	27,360	15.1	12.5	5325997
	CSCF4860N6D*	A*VC950905DXA*	34,200	27,360	15.1	12.5	5326027
	CSCF4860N6D*	A*VC951155DXA*	34,200	27,360	15.1	12.5	5326057
	CSCF4860N6D*	A*VM960604CXA*	34,200	27,360	14.5	12.0	5326090
	CSCF4860N6D*	A*VM960805CXA*	34,200	27,360	15.1	12.5	5326123
	CSCF4860N6D*	A*VM960805DXA*	34,200	27,360	15.1	12.5	5326149
	CSCF4860N6D*	A*VM961005DXA*	34,200	27,360	15.1	12.5	5326180
	CSCF4860N6D*	A*VM961155DXA*	34,200	27,360	15.1	12.5	5326211
	CSCF4860N6D*	ADVC80805C*B*	33,800	27,040	15.0	12.5	5326230
	CSCF4860N6D*	ADVC81005C*B*	33,800	27,040	15.0	12.5	5326247
	CSCF4860N6D*	G*E80805C*B*	34,000	27,200	15.0	12.5	5325842
	CSCF4860N6D*	G*E81005C*B*	34,000	27,200	15.0	12.5	5325850
	CSCF4860N6D*	G*VC80805C*B*	33,800	27,040	15.0	12.5	5325901
	CSCF4860N6D*	G*VC81005C*B*	33,800	27,040	15.1	12.5	5325933
	CSCF4860N6D*	G*VC950704CXA*	34,200	27,360	15.1	12.5	5325965
	CSCF4860N6D*	G*VC950905CXA*	34,200	27,360	15.1	12.5	5325998
	CSCF4860N6D*	G*VC950905DXA*	34,200	27,360	15.1	12.5	5326028
	CSCF4860N6D*	G*VC951155DXA*	34,200	27,360	15.1	12.5	5326058
	CSCF4860N6D*	G*VM960604CXA*	34,200	27,360	14.5	12.0	5326091
	CSCF4860N6D*	G*VM960805CXA*	34,200	27,360	15.1	12.5	5326124
CSCF4860N6D*	G*VM960805DXA*	34,200	27,360	15.1	12.5	5326150	
CSCF4860N6D*	G*VM961005DXA*	34,200	27,360	15.1	12.5	5326181	
CSCF4860N6D*	G*VM961155DXA*	34,200	27,360	15.1	12.5	5326212	
CSCF4860N6D*	GME950805CXA*	34,200	27,360	14.5	12.0	5326274	
CSCF4860N6D*	GME951005DXA*	34,200	27,360	15.0	12.5	5326289	
CSCF4860N6D*+EEP		34,200	27,360	14.5	12.0	5325815	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0361B* (cont.)	CSCF4860N6D*+EEP+TXV		34,200	27,360	14.5	12.0	5325816
	CSCF4860N6D*+MBVC1600**-1A*		34,200	27,360	15.5	12.5	5326915
	CSCF4860N6D*+MBVC1600**-1A*+TXV		34,200	27,360	15.5	12.5	5325817
	CSCF4860N6D*+MBVC2000**-1A*		34,200	27,360	15.5	12.5	5325818
	CSCF4860N6D*+MBVC2000**-1A*+TXV		34,200	27,360	15.5	12.5	5325819
	CSCF4860N6D*+TXV	A*VC80805C*B*	33,800	27,040	15.0	12.5	5325902
	CSCF4860N6D*+TXV	A*VC81005C*B*	33,800	27,040	15.5	12.5	5325934
	CSCF4860N6D*+TXV	A*VC950704CXA*	34,200	27,360	15.5	12.5	5325966
	CSCF4860N6D*+TXV	A*VC950905CXA*	34,200	27,360	15.5	12.5	5325999
	CSCF4860N6D*+TXV	A*VC950905DXA*	34,200	27,360	15.5	12.5	5326029
	CSCF4860N6D*+TXV	A*VC951155DXA*	34,200	27,360	15.5	12.5	5326059
	CSCF4860N6D*+TXV	A*VM960604CXA*	34,200	27,360	14.5	12.0	5326092
	CSCF4860N6D*+TXV	A*VM960805CXA*	34,200	27,360	15.5	12.5	5326125
	CSCF4860N6D*+TXV	A*VM960805DXA*	34,200	27,360	15.5	12.5	5326151
	CSCF4860N6D*+TXV	A*VM961005DXA*	34,200	27,360	15.5	12.5	5326182
	CSCF4860N6D*+TXV	A*VM961155DXA*	34,200	27,360	15.5	12.5	5326213
	CSCF4860N6D*+TXV	ADV80805C*B*	33,800	27,040	15.0	12.5	5326231
	CSCF4860N6D*+TXV	ADV81005C*B*	33,800	27,040	15.0	12.5	5326248
	CSCF4860N6D*+TXV	G*E80805C*B*	34,000	27,200	15.0	12.5	5325843
	CSCF4860N6D*+TXV	G*E81005C*B*	34,000	27,200	15.0	12.5	5325851
	CSCF4860N6D*+TXV	G*VC80805C*B*	33,800	27,040	15.0	12.5	5325903
	CSCF4860N6D*+TXV	G*VC81005C*B*	33,800	27,040	15.5	12.5	5325935
	CSCF4860N6D*+TXV	G*VC950704CXA*	34,200	27,360	15.5	12.5	5325967
	CSCF4860N6D*+TXV	G*VC950905CXA*	34,200	27,360	15.5	12.5	4767517
	CSCF4860N6D*+TXV	G*VC950905DXA*	34,200	27,360	15.5	12.5	4767518
	CSCF4860N6D*+TXV	G*VC951155DXA*	34,200	27,360	15.5	12.5	4767519
	CSCF4860N6D*+TXV	G*VM960604CXA*	34,200	27,360	14.5	12.0	5326093
	CSCF4860N6D*+TXV	G*VM960805CXA*	34,200	27,360	15.5	12.5	5326126
CSCF4860N6D*+TXV	G*VM960805DXA*	34,200	27,360	15.5	12.5	5326152	
CSCF4860N6D*+TXV	G*VM961005DXA*	34,200	27,360	15.5	12.5	5326183	
CSCF4860N6D*+TXV	G*VM961155DXA*	34,200	27,360	15.5	12.5	5326214	
CSCF4860N6D*+TXV	GME950805CXA*	34,200	27,360	14.5	12.0	5326275	
CSCF4860N6D*+TXV	GME951005DXA*	33,800	27,040	15.1	12.5	5326290	
SSX16 0421A*	ASPF426016E*+TXV		39,500	30,420	16.0	13.0	4358278
	AVPTC426014A*		39,500	30,420	16.0	13.0	4431269
	CA*F3743*6D*	A*VC80805C*B*	38,000	29,260	14.5	12.0	5328362
	CA*F3743*6D*	A*VC81005C*B*	38,000	29,260	14.5	12.0	5328384
	CA*F3743*6D*	A*VC950704CXA*	38,000	29,260	14.0	12.0	5328406
	CA*F3743*6D*	A*VC950905DXA*	38,000	29,260	14.5	12.0	5328427
	CA*F3743*6D*	A*VC951155DXA*	38,000	29,260	14.5	12.0	5328443
	CA*F3743*6D*	A*VM960805CXA*	38,000	29,260	14.5	12.0	5328459
	CA*F3743*6D*	A*VM961005DXA*	38,000	29,260	14.5	12.0	5328481
	CA*F3743*6D*	A*VM961155DXA*	38,000	29,260	14.5	12.0	5328534
	CA*F3743*6D*	ADV80805C*B*	38,000	29,260	14.5	12.0	5328510
	CA*F3743*6D*	G*E80805C*B*	38,000	29,260	14.5	12.0	5328340
	CA*F3743*6D*	G*E81005C*B*	38,000	29,260	14.0	12.0	5328351
	CA*F3743*6D*	G*VC80805C*B*	38,000	29,260	14.5	12.0	5328363
	CA*F3743*6D*	G*VC81005C*B*	38,000	29,260	14.5	12.0	5328385
	CA*F3743*6D*	G*VC950704CXA*	38,000	29,260	14.0	12.0	5328407
	CA*F3743*6D*	G*VC950905DXA*	38,000	29,260	14.5	12.0	5328428
	CA*F3743*6D*	G*VC951155DXA*	38,000	29,260	14.5	12.0	5328444
	CA*F3743*6D*	G*VM960805CXA*	38,000	29,260	14.5	12.0	5328460

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CA*F3743*6D*	G*VM961005DXA*	38,000	29,260	14.5	12.0	5328482
	CA*F3743*6D*	G*VM961155DXA*	38,000	29,260	14.5	12.0	5328535
	CA*F3743*6D*	GME950805CXA*	38,000	29,260	14.0	12.0	5328553
	CA*F3743*6D*	GME951005DXA*	38,000	29,260	14.5	12.0	5328525
	CA*F3743*6D*+EEP		37,600	28,950	13.5	11.5	5328329
	CA*F3743*6D*+EEP+TXV		37,600	28,950	14.0	11.5	5328336
	CA*F3743*6D*+MBVC2000**-1A*		38,000	29,260	15.5	13.0	5328499
	CA*F3743*6D*+MBVC2000**-1A*+TXV		38,000	29,260	16.0	13.0	5328506
	CA*F3743*6D*+TXV	A*VC80805C*B*	38,000	29,260	15.5	12.5	5328376
	CA*F3743*6D*+TXV	A*VC81005C*B*	38,000	29,260	15.5	12.5	5328398
	CA*F3743*6D*+TXV	A*VC950704CXA*	38,000	29,260	14.5	12.0	5328420
	CA*F3743*6D*+TXV	A*VC950905DXA*	38,000	29,260	15.0	12.5	5328439
	CA*F3743*6D*+TXV	A*VC951155DXA*	38,000	29,260	15.5	12.5	5328455
	CA*F3743*6D*+TXV	A*VM960805CXA*	38,000	29,260	15.0	12.5	5328473
	CA*F3743*6D*+TXV	A*VM961005DXA*	38,000	29,260	15.0	12.5	5328493
	CA*F3743*6D*+TXV	A*VM961155DXA*	38,000	29,260	15.0	12.5	5328546
	CA*F3743*6D*+TXV	ADVC80805C*B*	38,000	29,260	15.0	12.5	5328517
	CA*F3743*6D*+TXV	G*E80805C*B*	38,000	29,260	15.0	12.5	5328347
	CA*F3743*6D*+TXV	G*E81005C*B*	38,000	29,260	15.0	12.5	5328358
	CA*F3743*6D*+TXV	G*VC80805C*B*	38,000	29,260	15.5	12.5	5328377
	CA*F3743*6D*+TXV	G*VC81005C*B*	38,000	29,260	15.5	12.5	5328399
	CA*F3743*6D*+TXV	G*VC950704CXA*	38,000	29,260	14.5	12.0	5328421
	CA*F3743*6D*+TXV	G*VC950905DXA*	38,000	29,260	15.0	12.5	5328440
	CA*F3743*6D*+TXV	G*VC951155DXA*	38,000	29,260	15.5	12.5	5328456
	CA*F3743*6D*+TXV	G*VM960805CXA*	38,000	29,260	15.0	12.5	5328474
	CA*F3743*6D*+TXV	G*VM961005DXA*	38,000	29,260	15.0	12.5	5328494
	CA*F3743*6D*+TXV	G*VM961155DXA*	38,000	29,260	15.0	12.5	5328547
	CA*F3743*6D*+TXV	GME950805CXA*	38,000	29,260	14.5	12.0	5328522
	CA*F3743*6D*+TXV	GME951005DXA*	38,000	29,260	15.0	12.5	5328531
	CA*F4860*6D*	A*VC80805C*B*	38,500	29,650	14.5	12.0	5328364
	CA*F4860*6D*	A*VC81005C*B*	38,000	29,260	14.5	12.0	5328386
	CA*F4860*6D*	A*VC950704CXA*	38,000	29,260	14.0	12.0	5328408
	CA*F4860*6D*	A*VC950905DXA*	38,000	29,260	14.5	12.0	5328429
	CA*F4860*6D*	A*VC951155DXA*	38,000	29,260	14.5	12.0	5328445
	CA*F4860*6D*	A*VM960805CXA*	38,000	29,260	14.5	12.0	5328461
	CA*F4860*6D*	A*VM961005DXA*	38,000	29,260	14.5	12.0	5328483
	CA*F4860*6D*	A*VM961155DXA*	38,000	29,260	14.5	12.0	5328536
	CA*F4860*6D*	ADVC80805C*B*	38,000	29,260	14.5	12.0	5328511
	CA*F4860*6D*	G*E80805C*B*	38,000	29,260	14.5	12.0	5328341
	CA*F4860*6D*	G*E81005C*B*	38,000	29,260	14.0	12.0	5328352
	CA*F4860*6D*	G*VC80805C*B*	38,500	29,650	14.5	12.0	5328365
	CA*F4860*6D*	G*VC81005C*B*	38,000	29,260	14.5	12.0	5328387
CA*F4860*6D*	G*VC950704CXA*	38,000	29,260	14.0	12.0	5328409	
CA*F4860*6D*	G*VC950905DXA*	38,000	29,260	14.5	12.0	5328430	
CA*F4860*6D*	G*VC951155DXA*	38,000	29,260	14.5	12.0	5328446	
CA*F4860*6D*	G*VM960805CXA*	38,000	29,260	14.5	12.0	5328462	
CA*F4860*6D*	G*VM961005DXA*	38,000	29,260	14.5	12.0	5328484	
CA*F4860*6D*	G*VM961155DXA*	38,000	29,260	14.5	12.0	5328537	
CA*F4860*6D*	GME950805CXA*	38,000	29,260	14.0	12.0	5328554	
CA*F4860*6D*	GME951005DXA*	38,000	29,260	15.0	12.5	5328526	
CA*F4860*6D*+EEP		38,000	29,260	13.5	11.5	5328330	
CA*F4860*6D*+EEP+TXV		39,000	30,030	14.5	12.2	4559595	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CA*F4860*6D*+MBVC2000**-1A*		38,000	29,260	15.0	13.0	5328500
	CA*F4860*6D*+MBVC2000**-1A*+TXV		39,000	30,030	16.0	13.0	3880344
	CA*F4860*6D*+TXV	A*VC80604B*B*	38,500	29,650	15.0	12.5	5039045
	CA*F4860*6D*+TXV	A*VC80805C*B*	38,500	29,650	15.5	12.7	5039179
	CA*F4860*6D*+TXV	A*VC81005C*B*	38,500	29,650	15.5	12.7	5038889
	CA*F4860*6D*+TXV	A*VC950704CXA*	38,500	29,650	15.0	12.5	3880554
	CA*F4860*6D*+TXV	A*VC950714CXA*	38,500	29,650	15.0	12.5	4202038
	CA*F4860*6D*+TXV	A*VC950905CXA*	38,500	29,650	15.5	13.0	4201403
	CA*F4860*6D*+TXV	A*VC950905DXA*	39,000	30,030	15.0	12.5	3880555
	CA*F4860*6D*+TXV	A*VC950915DXA*	39,000	30,030	15.0	12.5	4202047
	CA*F4860*6D*+TXV	A*VC951155DXA*	39,000	30,030	16.0	13.0	3880556
	CA*F4860*6D*+TXV	A*VM960604CXA*	38,500	29,650	15.0	12.5	4652781
	CA*F4860*6D*+TXV	A*VM960805CXA*	38,500	29,650	15.5	13.0	4652779
	CA*F4860*6D*+TXV	A*VM960805DXA*	39,000	30,030	15.0	12.5	4652796
	CA*F4860*6D*+TXV	A*VM961005DXA*	39,000	30,030	16.0	13.0	4652790
	CA*F4860*6D*+TXV	A*VM961155DXA*	39,000	30,030	16.0	13.0	4652787
	CA*F4860*6D*+TXV	ADV80805C*B*	38,500	29,650	15.5	12.7	5039259
	CA*F4860*6D*+TXV	ADV81005C*B*	38,500	29,650	15.5	12.7	5038909
	CA*F4860*6D*+TXV	G*E80603B*B*	38,500	29,650	15.0	12.5	5039160
	CA*F4860*6D*+TXV	G*E80805C*B*	38,500	29,650	15.5	12.7	5039024
	CA*F4860*6D*+TXV	G*E81005C*B*	38,500	29,650	15.0	12.5	5038843
	CA*F4860*6D*+TXV	G*VC80604B*B*	38,500	29,650	15.0	12.5	5038844
	CA*F4860*6D*+TXV	G*VC80805C*B*	38,500	29,650	15.5	12.7	5039034
	CA*F4860*6D*+TXV	G*VC81005C*B*	38,500	29,650	15.5	12.7	5038908
	CA*F4860*6D*+TXV	G*VC91155DXA*	38,500	29,650	16.0	13.0	3880572
	CA*F4860*6D*+TXV	G*VC950704CXA*	38,500	29,650	15.0	12.5	3880573
	CA*F4860*6D*+TXV	G*VC950714CXA*	38,500	29,650	15.0	12.5	4202039
	CA*F4860*6D*+TXV	G*VC950905CXA*	38,500	29,650	15.5	13.0	4201404
	CA*F4860*6D*+TXV	G*VC950905DXA*	38,500	29,650	15.0	12.5	3880574
	CA*F4860*6D*+TXV	G*VC950915DXA*	38,500	29,650	15.0	12.5	4202048
	CA*F4860*6D*+TXV	G*VC951155DXA*	39,000	30,030	16.0	13.0	3880575
	CA*F4860*6D*+TXV	G*VM960604CXA*	38,500	29,650	15.0	12.5	4652782
	CA*F4860*6D*+TXV	G*VM960805CXA*	38,500	29,650	15.5	13.0	4652780
	CA*F4860*6D*+TXV	G*VM960805DXA*	38,500	29,650	15.0	12.5	4652785
	CA*F4860*6D*+TXV	G*VM961005DXA*	39,000	30,030	16.0	13.0	4652791
	CA*F4860*6D*+TXV	G*VM961155DXA*	39,000	30,030	16.0	13.0	4652788
	CA*F4860*6D*+TXV	GME950805CXA*	38,000	29,260	15.0	12.5	4703762
	CA*F4860*6D*+TXV	GME951005DXA*	38,500	29,650	15.5	12.5	4703715
	CA*F4961*6D*	A*VC80805C*B*	38,500	29,650	15.0	12.5	5328366
	CA*F4961*6D*	A*VC81005C*B*	38,500	29,650	15.0	12.5	5328388
	CA*F4961*6D*	A*VC950704CXA*	38,500	29,650	14.5	12.5	5328410
	CA*F4961*6D*	A*VC950905DXA*	38,500	29,650	14.5	12.0	5328431
	CA*F4961*6D*	A*VC951155DXA*	38,500	29,650	15.0	12.5	5328447
	CA*F4961*6D*	A*VM960805CXA*	38,500	29,650	14.5	12.0	5328463
	CA*F4961*6D*	A*VM961005DXA*	38,500	29,650	15.0	12.5	5328485
	CA*F4961*6D*	A*VM961155DXA*	38,500	29,650	15.0	12.5	5328538
	CA*F4961*6D*	ADV80805C*B*	38,500	29,650	15.0	12.5	5328512
CA*F4961*6D*	G*E80805C*B*	38,500	29,650	15.0	12.5	5328342	
CA*F4961*6D*	G*E81005C*B*	38,500	29,650	14.5	12.0	5328353	
CA*F4961*6D*	G*VC80805C*B*	38,500	29,650	15.0	12.5	5328367	
CA*F4961*6D*	G*VC81005C*B*	38,500	29,650	15.0	12.5	5328389	
CA*F4961*6D*	G*VC950704CXA*	38,500	29,650	14.5	12.5	5328411	

See Notes on Page 52.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CA*F4961*6D*	G*VC950905DXA*	38,500	29,650	14.5	12.0	5328432
	CA*F4961*6D*	G*VC951155DXA*	38,500	29,650	15.0	12.5	5328448
	CA*F4961*6D*	G*VM960805CXA*	38,500	29,650	14.5	12.0	5328464
	CA*F4961*6D*	G*VM961005DXA*	38,500	29,650	15.0	12.5	5328486
	CA*F4961*6D*	G*VM961155DXA*	38,500	29,650	15.0	12.5	5328539
	CA*F4961*6D*	GME950805CXA*	38,500	29,650	14.0	12.5	5328555
	CA*F4961*6D*	GME951005DXA*	38,500	29,650	15.0	12.5	5328527
	CA*F4961*6D*+EEP		38,000	29,260	13.5	11.5	5328331
	CA*F4961*6D*+EEP+TXV		39,000	30,030	14.5	12.2	4431657
	CA*F4961*6D*+MBVC2000**-1A*		38,500	29,650	15.5	13.0	5328501
	CA*F4961*6D*+MBVC2000**-1A*+TXV		40,000	30,800	16.0	13.0	4431677
	CA*F4961*6D*+TXV	A*VC80604B*B*	39,000	30,030	15.0	12.5	5039141
	CA*F4961*6D*+TXV	A*VC80805C*B*	39,500	30,420	15.5	12.7	5038963
	CA*F4961*6D*+TXV	A*VC81005C*B*	39,500	30,420	15.5	12.7	5038877
	CA*F4961*6D*+TXV	A*VC950704CXA*	39,500	30,420	15.0	12.5	4431787
	CA*F4961*6D*+TXV	A*VC950714CXA*	39,500	30,420	15.0	12.5	4431788
	CA*F4961*6D*+TXV	A*VC950905CXA*	39,500	30,420	15.5	13.0	4431789
	CA*F4961*6D*+TXV	A*VC950905DXA*	39,500	30,420	15.5	12.7	4431790
	CA*F4961*6D*+TXV	A*VC950915DXA*	39,500	30,420	15.5	12.7	4431791
	CA*F4961*6D*+TXV	A*VC951155DXA*	39,500	30,420	16.0	13.0	4431792
	CA*F4961*6D*+TXV	A*VM960604CXA*	39,500	30,420	15.0	12.5	4652818
	CA*F4961*6D*+TXV	A*VM960805CXA*	39,500	30,420	15.5	13.0	4652810
	CA*F4961*6D*+TXV	A*VM960805DXA*	39,500	30,420	15.5	12.7	4652820
	CA*F4961*6D*+TXV	A*VM961005DXA*	39,500	30,420	16.0	13.0	4652806
	CA*F4961*6D*+TXV	A*VM961155DXA*	39,500	30,420	16.0	13.0	4652801
	CA*F4961*6D*+TXV	ADVC80805C*B*	39,500	30,420	15.5	12.7	5038961
	CA*F4961*6D*+TXV	ADVC81005C*B*	39,500	30,420	15.5	12.7	5038995
	CA*F4961*6D*+TXV	G*E80603B*B*	39,000	30,030	15.0	12.3	5039241
	CA*F4961*6D*+TXV	G*E80805C*B*	39,000	30,030	15.5	12.7	5039043
	CA*F4961*6D*+TXV	G*E81005C*B*	39,000	30,030	15.0	12.5	5038859
	CA*F4961*6D*+TXV	G*VC80604B*B*	39,000	30,030	15.0	12.5	5039044
	CA*F4961*6D*+TXV	G*VC80805C*B*	39,500	30,420	15.5	12.7	5039242
	CA*F4961*6D*+TXV	G*VC81005C*B*	39,500	30,420	15.5	12.7	5039161
	CA*F4961*6D*+TXV	G*VC950704CXA*	39,500	30,420	15.0	12.5	4431801
	CA*F4961*6D*+TXV	G*VC950714CXA*	39,500	30,420	15.0	12.5	4431802
	CA*F4961*6D*+TXV	G*VC950905CXA*	39,500	30,420	15.5	13.0	4431803
	CA*F4961*6D*+TXV	G*VC950905DXA*	39,500	30,420	15.5	12.7	4431804
	CA*F4961*6D*+TXV	G*VC950915DXA*	39,500	30,420	15.5	12.7	4431805
	CA*F4961*6D*+TXV	G*VC951155DXA*	39,500	30,420	16.0	13.0	4431806
	CA*F4961*6D*+TXV	G*VM960604CXA*	39,500	30,420	15.0	12.5	4652819
	CA*F4961*6D*+TXV	G*VM960805CXA*	39,500	30,420	15.5	13.0	4652811
	CA*F4961*6D*+TXV	G*VM960805DXA*	39,500	30,420	15.5	12.7	4652821
	CA*F4961*6D*+TXV	G*VM961005DXA*	39,500	30,420	16.0	13.0	4652805
	CA*F4961*6D*+TXV	G*VM961155DXA*	39,500	30,420	16.0	13.0	4652800
	CA*F4961*6D*+TXV	GME950805CXA*	39,000	30,030	15.0	12.5	4703764
	CA*F4961*6D*+TXV	GME951005DXA*	39,000	30,030	15.5	12.5	4703717
	CHPF3743C6B*	A*VC80805C*B*	38,000	29,260	15.0	12.5	5328368
	CHPF3743C6B*	A*VC81005C*B*	38,000	29,260	15.0	12.5	5328390
	CHPF3743C6B*	A*VC950704CXA*	38,000	29,260	14.0	12.0	5328412
	CHPF3743C6B*	A*VM960805CXA*	38,000	29,260	14.5	12.0	5328465
	CHPF3743C6B*	ADVC80805C*B*	38,000	29,260	15.0	12.5	5328513
	CHPF3743C6B*	G*E80805C*B*	38,000	29,260	14.5	12.0	5328343

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CHPF3743C6B*	G*E81005C*B*	38,500	29,650	14.0	12.0	5328354
	CHPF3743C6B*	G*VC80805C*B*	38,000	29,260	15.0	12.5	5328369
	CHPF3743C6B*	G*VC81005C*B*	38,000	29,260	15.0	12.5	5328391
	CHPF3743C6B*	G*VC950704CXA*	38,000	29,260	14.0	12.0	5328413
	CHPF3743C6B*	G*VM960805CXA*	38,000	29,260	14.5	12.0	5328466
	CHPF3743C6B*	GME950805CXA*	38,000	29,260	14.0	12.0	5328521
	CHPF3743C6B*+EEP		37,600	28,950	13.5	11.5	5328332
	CHPF3743C6B*+EEP+TXV		37,600	28,950	14.0	11.5	5328337
	CHPF3743C6B*+MBVC2000**-1A*		39,000	30,030	15.0	12.5	5328502
	CHPF3743C6B*+MBVC2000**-1A*+TXV		39,000	30,030	16.0	13.0	5328507
	CHPF3743C6B*+TXV	A*VC80805C*B*	38,000	29,260	15.5	12.5	5328378
	CHPF3743C6B*+TXV	A*VC81005C*B*	38,000	29,260	15.5	12.5	5328400
	CHPF3743C6B*+TXV	A*VC950704CXA*	38,000	29,260	15.0	12.5	5328422
	CHPF3743C6B*+TXV	A*VM960805CXA*	38,000	29,260	15.5	12.5	5328475
	CHPF3743C6B*+TXV	ADVC80805C*B*	38,000	29,260	15.5	12.5	5328518
	CHPF3743C6B*+TXV	G*E80805C*B*	38,000	29,260	15.0	12.5	5328348
	CHPF3743C6B*+TXV	G*E81005C*B*	38,500	29,650	15.0	12.5	5328359
	CHPF3743C6B*+TXV	G*VC80805C*B*	38,000	29,260	15.5	12.5	5328379
	CHPF3743C6B*+TXV	G*VC81005C*B*	38,000	29,260	15.5	12.5	5328401
	CHPF3743C6B*+TXV	G*VC950704CXA*	38,000	29,260	15.0	12.5	5328423
	CHPF3743C6B*+TXV	G*VM960805CXA*	38,000	29,260	15.5	12.5	5328476
	CHPF3743C6B*+TXV	GME950805CXA*	38,000	29,260	15.0	12.5	5328523
	CHPF3743D6B*	A*VC80805C*B*	38,000	29,260	15.0	12.5	5328370
	CHPF3743D6B*	A*VC81005C*B*	38,000	29,260	15.0	12.5	5328392
	CHPF3743D6B*	A*VC950704CXA*	38,000	29,260	14.0	12.0	5328414
	CHPF3743D6B*	A*VC950905DXA*	38,000	29,260	14.5	12.0	5328433
	CHPF3743D6B*	A*VC951155DXA*	38,000	29,260	15.0	12.5	5328449
	CHPF3743D6B*	A*VM960805CXA*	38,000	29,260	14.5	12.0	5328467
	CHPF3743D6B*	A*VM961005DXA*	38,000	29,260	14.5	12.0	5328487
	CHPF3743D6B*	A*VM961155DXA*	38,000	29,260	15.0	12.5	5328540
	CHPF3743D6B*	ADVC80805C*B*	38,000	29,260	14.5	12.0	5328514
	CHPF3743D6B*	G*E80805C*B*	38,000	29,260	14.5	12.0	5328344
	CHPF3743D6B*	G*E81005C*B*	38,000	29,260	14.5	12.0	5328355
	CHPF3743D6B*	G*VC80805C*B*	38,000	29,260	15.0	12.5	5328371
	CHPF3743D6B*	G*VC81005C*B*	38,000	29,260	15.0	12.5	5328393
	CHPF3743D6B*	G*VC950704CXA*	38,000	29,260	14.0	12.0	5328415
	CHPF3743D6B*	G*VC950905DXA*	38,000	29,260	14.5	12.0	5328434
	CHPF3743D6B*	G*VC951155DXA*	38,000	29,260	15.0	12.5	5328450
	CHPF3743D6B*	G*VM960805CXA*	38,000	29,260	14.5	12.0	5328468
	CHPF3743D6B*	G*VM961005DXA*	38,000	29,260	14.5	12.0	5328488
	CHPF3743D6B*	G*VM961155DXA*	38,000	29,260	15.0	12.5	5328541
	CHPF3743D6B*	GME950805CXA*	38,000	29,260	14.0	12.0	5328556
	CHPF3743D6B*	GME951005DXA*	38,000	29,260	14.5	12.5	5328528
	CHPF3743D6B*+EEP		37,600	28,950	13.5	11.5	5328333
	CHPF3743D6B*+EEP+TXV		37,600	28,950	14.0	11.5	5328338
	CHPF3743D6B*+MBVC2000**-1A*		38,000	29,260	15.5	13.0	5328503
	CHPF3743D6B*+MBVC2000**-1A*+TXV		38,000	29,260	16.0	13.0	5328508
	CHPF3743D6B*+TXV	A*VC80805C*B*	38,000	29,260	15.5	12.5	5328380
	CHPF3743D6B*+TXV	A*VC81005C*B*	38,000	29,260	15.5	12.5	5328402
	CHPF3743D6B*+TXV	A*VC950704CXA*	38,000	29,260	14.5	12.0	5328424
CHPF3743D6B*+TXV	A*VC950905DXA*	38,000	29,260	15.0	12.5	5328441	
CHPF3743D6B*+TXV	A*VC951155DXA*	38,000	29,260	15.5	12.5	5328457	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CHPF3743D6B*+TXV	A*VM960805CXA*	38,000	29,260	15.0	12.5	5328477
	CHPF3743D6B*+TXV	A*VM961005DXA*	38,000	29,260	15.0	12.5	5328495
	CHPF3743D6B*+TXV	A*VM961155DXA*	38,000	29,260	15.0	12.5	5328548
	CHPF3743D6B*+TXV	ADVC80805C*B*	38,000	29,260	15.0	12.5	5328519
	CHPF3743D6B*+TXV	G*E80805C*B*	38,000	29,260	15.0	12.5	5328349
	CHPF3743D6B*+TXV	G*E81005C*B*	38,000	29,260	15.0	12.5	5328360
	CHPF3743D6B*+TXV	G*VC80805C*B*	38,000	29,260	15.5	12.5	5328381
	CHPF3743D6B*+TXV	G*VC81005C*B*	38,000	29,260	15.5	12.5	5328403
	CHPF3743D6B*+TXV	G*VC950704CXA*	38,000	29,260	14.5	12.0	5328425
	CHPF3743D6B*+TXV	G*VC950905DXA*	38,000	29,260	15.0	12.5	5328442
	CHPF3743D6B*+TXV	G*VC951155DXA*	38,000	29,260	15.5	12.5	5328458
	CHPF3743D6B*+TXV	G*VM960805CXA*	38,000	29,260	15.0	12.5	5328478
	CHPF3743D6B*+TXV	G*VM961005DXA*	38,000	29,260	15.0	12.5	5328496
	CHPF3743D6B*+TXV	G*VM961155DXA*	38,000	29,260	15.0	12.5	5328549
	CHPF3743D6B*+TXV	GME950805CXA*	38,000	29,260	14.5	12.0	5328552
	CHPF3743D6B*+TXV	GME951005DXA*	38,000	29,260	15.5	12.5	5328532
	CHPF4860D6D*	A*VC80805C*B*	38,000	29,260	15.0	12.5	5328372
	CHPF4860D6D*	A*VC81005C*B*	38,500	29,650	15.0	12.5	5328394
	CHPF4860D6D*	A*VC950704CXA*	38,500	29,650	14.0	12.5	5328416
	CHPF4860D6D*	A*VC950905DXA*	38,500	29,650	14.5	12.0	5328435
	CHPF4860D6D*	A*VC951155DXA*	38,500	29,650	15.0	12.5	5328451
	CHPF4860D6D*	A*VM960805CXA*	38,500	29,650	14.5	12.0	5328469
	CHPF4860D6D*	A*VM961005DXA*	38,500	29,650	15.0	12.5	5328489
	CHPF4860D6D*	A*VM961155DXA*	38,500	29,650	15.0	12.5	5328542
	CHPF4860D6D*	ADVC80805C*B*	38,500	29,650	15.0	12.5	5328515
	CHPF4860D6D*	G*E80805C*B*	38,500	29,650	15.0	12.5	5328345
	CHPF4860D6D*	G*E81005C*B*	38,500	29,650	14.5	12.0	5328356
	CHPF4860D6D*	G*VC80805C*B*	38,000	29,260	15.0	12.5	5328373
	CHPF4860D6D*	G*VC81005C*B*	38,500	29,650	15.0	12.5	5328395
	CHPF4860D6D*	G*VC950704CXA*	38,500	29,650	14.0	12.5	5328417
	CHPF4860D6D*	G*VC950905DXA*	38,500	29,650	14.5	12.0	5328436
	CHPF4860D6D*	G*VC951155DXA*	38,500	29,650	15.0	12.5	5328452
	CHPF4860D6D*	G*VM960805CXA*	38,500	29,650	14.5	12.0	5328470
	CHPF4860D6D*	G*VM961005DXA*	38,500	29,650	15.0	12.5	5328490
	CHPF4860D6D*	G*VM961155DXA*	38,500	29,650	15.0	12.5	5328543
	CHPF4860D6D*	GME950805CXA*	38,500	29,650	14.0	12.0	5328557
	CHPF4860D6D*	GME951005DXA*	38,500	29,650	15.0	12.5	5328529
	CHPF4860D6D*+EEP		38,000	29,260	13.5	11.5	5328334
	CHPF4860D6D*+EEP+TXV		39,500	30,420	14.5	12.2	3835185
	CHPF4860D6D*+MBVC2000*-1A*		38,500	29,650	15.5	13.0	5328504
	CHPF4860D6D*+MBVC2000*-1A*+TXV		39,500	30,420	16.0	13.0	3835187
	CHPF4860D6D*+TXV	A*VC80604B*B*	38,500	29,650	15.0	12.5	5039142
	CHPF4860D6D*+TXV	A*VC80805C*B*	39,000	30,030	15.5	12.7	5038878
	CHPF4860D6D*+TXV	A*VC81005C*B*	38,500	29,650	15.5	12.7	5038862
	CHPF4860D6D*+TXV	A*VC950704CXA*	38,500	29,650	15.0	12.5	3835199
	CHPF4860D6D*+TXV	A*VC950905DXA*	39,000	30,030	15.5	13.0	4201407
CHPF4860D6D*+TXV	A*VC950905DXA*	38,500	29,650	15.0	12.5	3835200	
CHPF4860D6D*+TXV	A*VC951155DXA*	38,500	29,650	15.0	12.5	3835201	
CHPF4860D6D*+TXV	A*VM960604CXA*	38,500	29,650	15.0	12.5	4652783	
CHPF4860D6D*+TXV	A*VM960805CXA*	39,000	30,030	15.5	13.0	4652793	
CHPF4860D6D*+TXV	A*VM960805DXA*	38,500	29,650	15.0	12.5	4652786	
CHPF4860D6D*+TXV	A*VM961005DXA*	38,500	29,650	15.0	12.5	4652777	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CHPF4860D6D*+TXV	A*VM961155DXA*	38,500	29,650	15.0	12.5	4652775
	CHPF4860D6D*+TXV	ADVC80805C*B*	39,000	30,030	15.5	12.7	5038860
	CHPF4860D6D*+TXV	ADVC81005C*B*	38,500	29,650	15.5	12.7	5038861
	CHPF4860D6D*+TXV	G*E80603B*B*	38,500	29,650	15.0	12.3	5039137
	CHPF4860D6D*+TXV	G*E80805C*B*	38,500	29,650	15.5	12.7	5039138
	CHPF4860D6D*+TXV	G*E81005C*B*	38,500	29,650	15.0	12.5	5038962
	CHPF4860D6D*+TXV	G*VC80604B*B*	38,500	29,650	15.0	12.5	5039139
	CHPF4860D6D*+TXV	G*VC80805C*B*	39,000	30,030	15.5	12.7	5039140
	CHPF4860D6D*+TXV	G*VC81005C*B*	38,500	29,650	15.5	12.7	5039162
	CHPF4860D6D*+TXV	G*VC950704CXA*	38,500	29,650	15.0	12.5	3835214
	CHPF4860D6D*+TXV	G*VC950905CXA*	39,000	30,030	15.5	13.0	4201408
	CHPF4860D6D*+TXV	G*VC950905DXA*	39,000	30,030	15.0	12.5	3835215
	CHPF4860D6D*+TXV	G*VC951155DXA*	38,500	29,650	15.0	12.5	3835216
	CHPF4860D6D*+TXV	G*VM960604CXA*	38,500	29,650	15.0	12.5	4652784
	CHPF4860D6D*+TXV	G*VM960805CXA*	39,000	30,030	15.5	13.0	4652794
	CHPF4860D6D*+TXV	G*VM960805DXA*	39,000	30,030	15.0	12.5	4652797
	CHPF4860D6D*+TXV	G*VM961005DXA*	38,500	29,650	15.0	12.5	4652778
	CHPF4860D6D*+TXV	G*VM961155DXA*	38,500	29,650	15.0	12.5	4652776
	CHPF4860D6D*+TXV	GME950805CXA*	38,500	29,650	15.0	12.5	4703765
	CHPF4860D6D*+TXV	GME951005DXA*	38,000	29,260	14.5	12.0	4703728
	CSCF4860N6D*	A*VC80805C*B*	38,500	29,650	15.0	12.5	5328374
	CSCF4860N6D*	A*VC81005C*B*	38,500	29,650	15.0	12.5	5328396
	CSCF4860N6D*	A*VC950704CXA*	38,500	29,650	14.5	12.5	5328418
	CSCF4860N6D*	A*VC950905DXA*	38,500	29,650	14.5	12.0	5328437
	CSCF4860N6D*	A*VC951155DXA*	38,500	29,650	15.0	12.5	5328453
	CSCF4860N6D*	A*VM960805CXA*	38,500	29,650	14.5	12.0	5328471
	CSCF4860N6D*	A*VM961005DXA*	38,500	29,650	14.5	12.0	5328491
	CSCF4860N6D*	A*VM961155DXA*	38,500	29,650	15.0	12.5	5328544
	CSCF4860N6D*	ADVC80805C*B*	38,500	29,650	15.0	12.5	5328516
	CSCF4860N6D*	G*E80805C*B*	38,500	29,650	15.0	12.5	5328346
	CSCF4860N6D*	G*E81005C*B*	38,500	29,650	14.5	12.0	5328357
	CSCF4860N6D*	G*VC80805C*B*	38,500	29,650	15.0	12.5	5328375
	CSCF4860N6D*	G*VC81005C*B*	38,500	29,650	15.0	12.5	5328397
	CSCF4860N6D*	G*VC950704CXA*	38,500	29,650	14.5	12.5	5328419
	CSCF4860N6D*	G*VC950905DXA*	38,500	29,650	14.5	12.0	5328438
	CSCF4860N6D*	G*VC951155DXA*	38,500	29,650	15.0	12.5	5328454
	CSCF4860N6D*	G*VM960805CXA*	38,500	29,650	14.5	12.0	5328472
	CSCF4860N6D*	G*VM961005DXA*	38,500	29,650	14.5	12.0	5328492
	CSCF4860N6D*	G*VM961155DXA*	38,500	29,650	15.0	12.5	5328545
	CSCF4860N6D*	GME950805CXA*	38,500	29,650	14.0	12.0	5328558
	CSCF4860N6D*	GME951005DXA*	38,500	29,650	14.5	12.5	5328530
	CSCF4860N6D*+EEP		38,000	29,260	13.5	11.5	5328335
	CSCF4860N6D*+EEP+TXV		38,000	29,260	14.5	12.0	5328339
	CSCF4860N6D*+MBVC2000*-1A*		38,500	29,650	15.5	13.0	5328505
	CSCF4860N6D*+MBVC2000*-1A*+TXV		38,500	29,650	16.0	13.0	5328509
	CSCF4860N6D*+TXV	A*VC80805C*B*	38,500	29,650	15.5	12.5	5328382
	CSCF4860N6D*+TXV	A*VC81005C*B*	38,500	29,650	15.0	12.5	5328404
	CSCF4860N6D*+TXV	A*VC950704CXA*	39,000	30,030	15.0	12.5	4767523
	CSCF4860N6D*+TXV	A*VC950905CXA*	39,500	30,420	15.0	13.0	4767524
	CSCF4860N6D*+TXV	A*VC950905DXA*	39,500	30,420	15.5	13.0	4767525
	CSCF4860N6D*+TXV	A*VC951155DXA*	39,000	30,030	15.5	13.0	4767526
	CSCF4860N6D*+TXV	A*VM960805CXA*	38,500	29,650	15.5	12.5	5328479

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0421A* (cont.)	CSCF4860N6D*+TXV	A*VM961005DXA*	38,500	29,650	15.0	12.5	5328497
	CSCF4860N6D*+TXV	A*VM961155DXA*	38,500	29,650	15.5	12.5	5328550
	CSCF4860N6D*+TXV	ADVC80805C*B*	38,500	29,650	15.0	12.5	5328520
	CSCF4860N6D*+TXV	G*E80805C*B*	38,500	29,650	15.0	12.5	5328350
	CSCF4860N6D*+TXV	G*E81005C*B*	38,500	29,650	15.0	12.5	5328361
	CSCF4860N6D*+TXV	G*VC80805C*B*	38,500	29,650	15.5	12.5	5328383
	CSCF4860N6D*+TXV	G*VC81005C*B*	38,500	29,650	15.0	12.5	5328405
	CSCF4860N6D*+TXV	G*VC950704CXA*	38,500	29,650	15.0	12.5	5328426
	CSCF4860N6D*+TXV	G*VC950905CXA*	39,500	30,420	15.0	13.0	4767534
	CSCF4860N6D*+TXV	G*VC950905DXA*	39,500	30,420	15.5	13.0	4767535
	CSCF4860N6D*+TXV	G*VC951155DXA*	39,500	30,420	15.5	13.0	4767536
	CSCF4860N6D*+TXV	G*VM960805CXA*	38,500	29,650	15.5	12.5	5328480
	CSCF4860N6D*+TXV	G*VM961005DXA*	38,500	29,650	15.0	12.5	5328498
	CSCF4860N6D*+TXV	G*VM961155DXA*	38,500	29,650	15.5	12.5	5328551
	CSCF4860N6D*+TXV	GME950805CXA*	38,500	29,650	15.0	12.5	5328524
CSCF4860N6D*+TXV	GME951005DXA*	38,500	29,650	15.5	12.5	5328533	
SSX16 0481B*	ASPF426016E*+TXV		45,500	34,130	15.5	12.5	4559597
	AVPTC426014A*		45,500	34,130	16.0	13.0	4431277
	CA*F4860*6D*	A*VC80604B*B*	45,000	33,750	14.5	12.0	5368298
	CA*F4860*6D*	A*VC80805C*B*	45,000	33,750	15.0	12.5	5368306
	CA*F4860*6D*	A*VC81005C*B*	45,000	33,750	15.0	12.5	5368316
	CA*F4860*6D*	A*VC950704CXA*	45,000	33,750	14.5	12.0	5368326
	CA*F4860*6D*	A*VC950905CXA*	45,000	33,750	14.0	12.0	5368338
	CA*F4860*6D*	A*VC950905DXA*	45,000	33,750	14.5	12.0	5368347
	CA*F4860*6D*	A*VC951155DXA*	45,000	33,750	15.0	12.5	5368357
	CA*F4860*6D*	A*VM960604CXA*	45,000	33,750	14.5	12.0	5368367
	CA*F4860*6D*	A*VM960805CXA*	45,000	33,750	14.0	12.0	5368379
	CA*F4860*6D*	A*VM961005DXA*	45,000	33,750	15.0	12.5	5368389
	CA*F4860*6D*	A*VM961155DXA*	45,000	33,750	15.0	12.5	5368400
	CA*F4860*6D*	ADVC80805C*B*	44,500	33,380	15.0	12.5	5368411
	CA*F4860*6D*	ADVC81005C*B*	44,500	33,380	15.0	12.5	5368416
	CA*F4860*6D*	G*E80805C*B*	45,000	33,750	15.0	12.5	5368288
	CA*F4860*6D*	G*E81005C*B*	45,000	33,750	15.0	12.5	5368293
	CA*F4860*6D*	G*VC80604B*B*	45,000	33,750	14.5	12.0	5368299
	CA*F4860*6D*	G*VC80805C*B*	45,000	33,750	15.0	12.5	5368307
	CA*F4860*6D*	G*VC81005C*B*	45,000	33,750	15.0	12.5	5368317
	CA*F4860*6D*	G*VC950704CXA*	45,000	33,750	14.5	12.0	5368327
	CA*F4860*6D*	G*VC950905CXA*	45,000	33,750	14.0	12.0	5368339
	CA*F4860*6D*	G*VC950905DXA*	45,000	33,750	14.5	12.0	5368348
	CA*F4860*6D*	G*VC951155DXA*	45,000	33,750	15.0	12.5	5368358
	CA*F4860*6D*	G*VM960604CXA*	45,000	33,750	14.5	12.0	5368368
	CA*F4860*6D*	G*VM960805CXA*	45,000	33,750	14.0	12.0	5368380
	CA*F4860*6D*	G*VM961005DXA*	45,000	33,750	15.0	12.5	5368390
	CA*F4860*6D*	G*VM961155DXA*	45,000	33,750	15.0	12.5	5368401
	CA*F4860*6D*	GME950805CXA*	44,500	33,380	15.0	12.5	5368421
	CA*F4860*6D*	GME951005DXA*	45,000	33,750	14.5	12.5	5368426
	CA*F4860*6D*+EEP		45,000	33,750	14.0	12.0	5368279
	CA*F4860*6D*+EEP+TXV		45,000	33,750	14.0	12.0	4300928
CA*F4860*6D*+MBVC2000*-1A*		45,000	33,750	15.5	12.5	5368280	
CA*F4860*6D*+MBVC2000*-1A*+TXV		45,000	33,750	16.0	13.0	4300930	
CA*F4860*6D*+TXV	A*VC80604B*B*	45,000	33,750	14.5	12.0	5368300	
CA*F4860*6D*+TXV	A*VC80805C*B*	45,000	33,750	15.0	12.3	5038901	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0481B* (cont.)	CA*F4860*6D*+TXV	A*VC81005C*B*	45,000	33,750	15.0	12.0	5039195
	CA*F4860*6D*+TXV	A*VC950704CXA*	45,000	33,750	14.5	12.0	5368328
	CA*F4860*6D*+TXV	A*VC950714CXA*	45,500	34,130	15.5	12.5	4300933
	CA*F4860*6D*+TXV	A*VC950905CXA*	45,000	33,750	16.0	13.0	4300934
	CA*F4860*6D*+TXV	A*VC950905DXA*	45,000	33,750	16.0	13.0	4300935
	CA*F4860*6D*+TXV	A*VC950915DXA*	46,000	34,500	16.0	13.0	4300936
	CA*F4860*6D*+TXV	A*VC951155DXA*	45,000	33,750	16.0	13.0	4300937
	CA*F4860*6D*+TXV	A*VM960604CXA*	45,000	33,750	15.5	12.5	4653009
	CA*F4860*6D*+TXV	A*VM960805CXA*	45,000	33,750	16.0	13.0	4653000
	CA*F4860*6D*+TXV	A*VM960805DXA*	46,000	34,500	16.0	13.0	4653101
	CA*F4860*6D*+TXV	A*VM961005DXA*	45,000	33,750	16.0	13.0	4652984
	CA*F4860*6D*+TXV	A*VM961155DXA*	45,000	33,750	16.0	13.0	4652966
	CA*F4860*6D*+TXV	ADVC80805C*B*	44,500	33,380	15.0	12.3	5038910
	CA*F4860*6D*+TXV	ADVC81005C*B*	44,500	33,380	15.0	12.0	5039063
	CA*F4860*6D*+TXV	G*E80805C*B*	45,000	33,750	15.0	12.3	5039003
	CA*F4860*6D*+TXV	G*E81005C*B*	45,000	33,750	15.0	12.3	5039143
	CA*F4860*6D*+TXV	G*VC80604B*B*	45,000	33,750	14.5	12.0	5368301
	CA*F4860*6D*+TXV	G*VC80805C*B*	45,000	33,750	15.0	12.3	5038900
	CA*F4860*6D*+TXV	G*VC81005C*B*	45,000	33,750	15.0	12.0	5039004
	CA*F4860*6D*+TXV	G*VC91155DXA*	46,000	34,500	16.0	13.0	4300942
	CA*F4860*6D*+TXV	G*VC950704CXA*	45,000	33,750	15.5	12.5	4300943
	CA*F4860*6D*+TXV	G*VC950714CXA*	45,500	34,130	15.5	12.5	4300944
	CA*F4860*6D*+TXV	G*VC950905CXA*	45,000	33,750	16.0	13.0	4300945
	CA*F4860*6D*+TXV	G*VC950905DXA*	45,000	33,750	16.0	13.0	4300946
	CA*F4860*6D*+TXV	G*VC950915DXA*	46,000	34,500	16.0	13.0	4300947
	CA*F4860*6D*+TXV	G*VC951155DXA*	45,000	33,750	16.0	13.0	4300948
	CA*F4860*6D*+TXV	G*VM960604CXA*	45,000	33,750	15.5	12.5	4653010
	CA*F4860*6D*+TXV	G*VM960805CXA*	45,000	33,750	16.0	13.0	4653001
	CA*F4860*6D*+TXV	G*VM960805DXA*	46,000	34,500	16.0	13.0	4653102
	CA*F4860*6D*+TXV	G*VM961005DXA*	45,000	33,750	16.0	13.0	4652985
	CA*F4860*6D*+TXV	G*VM961155DXA*	45,000	33,750	16.0	13.0	4652967
	CA*F4860*6D*+TXV	GME950805CXA*	44,500	33,380	16.0	13.0	4701090
	CA*F4860*6D*+TXV	GME951005DXA*	45,000	33,750	16.0	13.0	4701093
	CA*F4961*6D*	A*VC80604B*B*	45,000	33,750	15.0	12.5	5368302
	CA*F4961*6D*	A*VC80805C*B*	45,000	33,750	15.5	12.5	5368308
	CA*F4961*6D*	A*VC81005C*B*	45,000	33,750	15.5	12.5	5368318
	CA*F4961*6D*	A*VC950704CXA*	45,000	33,750	14.5	12.0	5368329
	CA*F4961*6D*	A*VC950905CXA*	45,000	33,750	14.5	12.0	5368340
	CA*F4961*6D*	A*VC950905DXA*	45,000	33,750	15.0	12.5	5368349
	CA*F4961*6D*	A*VC951155DXA*	45,000	33,750	15.5	12.5	5368359
	CA*F4961*6D*	A*VM960604CXA*	45,000	33,750	15.0	12.5	5368369
	CA*F4961*6D*	A*VM960805CXA*	45,000	33,750	14.5	12.0	5368381
CA*F4961*6D*	A*VM961005DXA*	45,000	33,750	15.5	12.5	5368391	
CA*F4961*6D*	A*VM961155DXA*	45,000	33,750	15.5	12.5	5368402	
CA*F4961*6D*	ADVC80805C*B*	44,500	33,380	15.0	12.5	5368412	
CA*F4961*6D*	ADVC81005C*B*	44,500	33,380	15.0	12.5	5368417	
CA*F4961*6D*	G*E80805C*B*	45,000	33,750	15.5	12.5	5368289	
CA*F4961*6D*	G*E81005C*B*	45,000	33,750	15.5	12.5	5368294	
CA*F4961*6D*	G*VC80604B*B*	45,000	33,750	15.0	12.5	5368303	
CA*F4961*6D*	G*VC80805C*B*	45,000	33,750	15.5	12.5	5368309	
CA*F4961*6D*	G*VC81005C*B*	45,000	33,750	15.5	12.5	5368319	
CA*F4961*6D*	G*VC950704CXA*	45,000	33,750	14.5	12.0	5368330	

See Notes on Page 52.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0481B* (cont.)	CA*F4961*6D*	G*VC950905CXA*	45,000	33,750	14.5	12.0	5368341
	CA*F4961*6D*	G*VC950905DXA*	45,000	33,750	15.0	12.5	5368350
	CA*F4961*6D*	G*VC951155DXA*	45,000	33,750	15.5	12.5	5368360
	CA*F4961*6D*	G*VM960604CXA*	45,000	33,750	15.0	12.5	5368370
	CA*F4961*6D*	G*VM960805CXA*	45,000	33,750	14.5	12.0	5368382
	CA*F4961*6D*	G*VM961005DXA*	45,000	33,750	15.5	12.5	5368392
	CA*F4961*6D*	G*VM961155DXA*	45,000	33,750	15.5	12.5	5368403
	CA*F4961*6D*	GME950805CXA*	44,500	33,380	15.0	12.5	5368422
	CA*F4961*6D*	GME951005DXA*	45,000	33,750	15.0	12.5	5368427
	CA*F4961*6D*+EEP		45,000	33,750	14.5	12.0	5368281
	CA*F4961*6D*+EEP+TXV		45,000	33,750	14.5	11.5	4431658
	CA*F4961*6D*+MBVC2000**-1A*		45,000	33,750	16.0	13.0	5368282
	CA*F4961*6D*+MBVC2000**-1A*+TXV		45,000	33,750	15.5	12.5	4431679
	CA*F4961*6D*+TXV	A*VC80604B*B*	45,000	33,750	15.0	12.5	5368304
	CA*F4961*6D*+TXV	A*VC80805C*B*	45,000	33,750	15.0	12.3	5039196
	CA*F4961*6D*+TXV	A*VC81005C*B*	45,000	33,750	15.5	12.0	5039214
	CA*F4961*6D*+TXV	A*VC950704CXA*	45,000	33,750	15.0	12.5	5368331
	CA*F4961*6D*+TXV	A*VC950905CXA*	45,000	33,750	16.0	13.0	4431817
	CA*F4961*6D*+TXV	A*VC950905DXA*	45,000	33,750	15.5	12.5	5368351
	CA*F4961*6D*+TXV	A*VC950915DXA*	46,000	34,500	16.0	13.0	4594627
	CA*F4961*6D*+TXV	A*VC951155DXA*	45,000	33,750	15.5	12.5	5368361
	CA*F4961*6D*+TXV	A*VM960604CXA*	45,000	33,750	15.5	12.5	5368371
	CA*F4961*6D*+TXV	A*VM960805CXA*	45,000	33,750	16.0	13.0	4653072
	CA*F4961*6D*+TXV	A*VM961005DXA*	45,000	33,750	15.5	12.5	5368393
	CA*F4961*6D*+TXV	A*VM961155DXA*	45,000	33,750	15.5	12.5	5368404
	CA*F4961*6D*+TXV	ADVC80805C*B*	44,500	33,380	15.0	12.3	5038890
	CA*F4961*6D*+TXV	ADVC81005C*B*	44,500	33,380	15.0	12.0	5039213
	CA*F4961*6D*+TXV	G*E80805C*B*	45,000	33,750	15.0	12.3	5039186
	CA*F4961*6D*+TXV	G*E81005C*B*	45,000	33,750	15.0	12.3	5038920
	CA*F4961*6D*+TXV	G*VC80604B*B*	45,000	33,750	15.0	12.5	5368305
	CA*F4961*6D*+TXV	G*VC80805C*B*	45,000	33,750	15.0	12.3	5039211
	CA*F4961*6D*+TXV	G*VC81005C*B*	45,000	33,750	15.5	12.0	5039212
	CA*F4961*6D*+TXV	G*VC950704CXA*	45,000	33,750	15.5	12.5	4431822
	CA*F4961*6D*+TXV	G*VC950905CXA*	45,000	33,750	16.0	13.0	4431823
	CA*F4961*6D*+TXV	G*VC950905DXA*	45,000	33,750	16.0	13.0	4431824
	CA*F4961*6D*+TXV	G*VC950915DXA*	46,000	34,500	16.0	13.0	4559608
	CA*F4961*6D*+TXV	G*VC951155DXA*	45,000	33,750	15.5	13.0	4431825
	CA*F4961*6D*+TXV	G*VM960604CXA*	45,000	33,750	15.5	12.5	5368372
	CA*F4961*6D*+TXV	G*VM960805CXA*	45,000	33,750	16.0	13.0	4653073
	CA*F4961*6D*+TXV	G*VM960805DXA*	46,000	34,500	16.0	13.0	4653104
	CA*F4961*6D*+TXV	G*VM961005DXA*	45,000	33,750	15.5	13.0	4653057
	CA*F4961*6D*+TXV	G*VM961155DXA*	45,000	33,750	15.5	13.0	4653037
	CA*F4961*6D*+TXV	GME950805CXA*	44,500	33,380	16.0	13.0	4701095
	CA*F4961*6D*+TXV	GME951005DXA*	45,000	33,750	15.0	12.5	4703720
	CHPF4860D6D*	A*VC80805C*B*	45,000	33,750	15.0	12.5	5368310
	CHPF4860D6D*	A*VC81005C*B*	45,000	33,750	15.0	12.5	5368320
	CHPF4860D6D*	A*VC950704CXA*	45,000	33,750	14.5	12.0	5368332
	CHPF4860D6D*	A*VC950905CXA*	45,000	33,750	14.5	12.0	5368342
	CHPF4860D6D*	A*VC950905DXA*	45,000	33,750	15.0	12.5	5368352
	CHPF4860D6D*	A*VC951155DXA*	45,000	33,750	15.0	12.5	5368362
	CHPF4860D6D*	A*VM960604CXA*	45,000	33,750	15.0	12.5	5368373
	CHPF4860D6D*	A*VM960805CXA*	45,000	33,750	14.5	12.0	5368383

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0481B* (cont.)	CHPF4860D6D*	A*VM961005DXA*	45,000	33,750	15.0	12.5	5368394
	CHPF4860D6D*	A*VM961155DXA*	45,000	33,750	15.0	12.5	5368405
	CHPF4860D6D*	ADVC80805C*B*	44,500	33,380	15.0	12.5	5368413
	CHPF4860D6D*	ADVC81005C*B*	44,500	33,380	15.0	12.5	5368418
	CHPF4860D6D*	G*E80805C*B*	45,000	33,750	15.0	12.5	5368290
	CHPF4860D6D*	G*E81005C*B*	45,000	33,750	15.0	12.5	5368295
	CHPF4860D6D*	G*VC80805C*B*	45,000	33,750	15.0	12.5	5368311
	CHPF4860D6D*	G*VC81005C*B*	45,000	33,750	15.0	12.5	5368321
	CHPF4860D6D*	G*VC950704CXA*	45,000	33,750	14.5	12.0	5368333
	CHPF4860D6D*	G*VC950905CXA*	45,000	33,750	14.5	12.0	5368343
	CHPF4860D6D*	G*VC950905DXA*	45,000	33,750	15.0	12.5	5368353
	CHPF4860D6D*	G*VC951155DXA*	45,000	33,750	15.0	12.5	5368363
	CHPF4860D6D*	G*VM960604CXA*	45,000	33,750	15.0	12.5	5368374
	CHPF4860D6D*	G*VM960805CXA*	45,000	33,750	14.5	12.0	5368384
	CHPF4860D6D*	G*VM961005DXA*	45,000	33,750	15.0	12.5	5368395
	CHPF4860D6D*	G*VM961155DXA*	45,000	33,750	15.0	12.5	5368406
	CHPF4860D6D*	GME950805CXA*	44,500	33,380	15.0	12.5	5368423
	CHPF4860D6D*	GME951005DXA*	45,000	33,750	14.5	12.0	5368428
	CHPF4860D6D*+EEP		45,000	33,750	14.0	12.0	5368283
	CHPF4860D6D*+EEP+TXV		45,000	33,750	14.0	12.0	4300960
	CHPF4860D6D*+MBVC2000** -1A*		45,000	33,750	15.5	12.5	5368284
	CHPF4860D6D*+MBVC2000** -1A*+TXV		45,000	33,750	16.0	13.2	4300962
	CHPF4860D6D*+TXV	A*VC80805C*B*	45,000	33,750	15.0	12.3	5039271
	CHPF4860D6D*+TXV	A*VC81005C*B*	45,000	33,750	15.5	12.0	5038922
	CHPF4860D6D*+TXV	A*VC950704CXA*	45,000	33,750	15.5	12.5	4300965
	CHPF4860D6D*+TXV	A*VC950905CXA*	45,000	33,750	16.0	13.0	4300967
	CHPF4860D6D*+TXV	A*VC950905DXA*	45,000	33,750	16.0	13.0	4300968
	CHPF4860D6D*+TXV	A*VC951155DXA*	45,000	33,750	16.0	13.0	4300970
	CHPF4860D6D*+TXV	A*VM960604CXA*	45,000	33,750	15.5	12.5	4653011
	CHPF4860D6D*+TXV	A*VM960805CXA*	45,000	33,750	16.0	13.0	4653075
	CHPF4860D6D*+TXV	A*VM960805DXA*	46,000	34,500	16.0	13.0	4653106
	CHPF4860D6D*+TXV	A*VM961005DXA*	45,000	33,750	16.0	13.0	4653059
	CHPF4860D6D*+TXV	A*VM961155DXA*	45,000	33,750	16.0	13.0	4653041
	CHPF4860D6D*+TXV	ADVC80805C*B*	44,500	33,380	15.0	12.3	5038891
	CHPF4860D6D*+TXV	ADVC81005C*B*	44,500	33,380	15.0	12.0	5039005
	CHPF4860D6D*+TXV	G*E80805C*B*	45,000	33,750	15.0	12.3	5038921
	CHPF4860D6D*+TXV	G*E81005C*B*	45,000	33,750	15.0	12.3	5038973
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,000	33,750	15.0	12.3	5039073
	CHPF4860D6D*+TXV	G*VC81005C*B*	45,000	33,750	15.5	12.0	5039187
	CHPF4860D6D*+TXV	G*VC950704CXA*	45,000	33,750	15.5	12.5	4300975
	CHPF4860D6D*+TXV	G*VC950905CXA*	45,000	33,750	16.0	13.0	4308858
	CHPF4860D6D*+TXV	G*VC950905DXA*	45,000	33,750	16.0	13.0	4308859
	CHPF4860D6D*+TXV	G*VC951155DXA*	45,000	33,750	16.0	13.0	4308861
	CHPF4860D6D*+TXV	G*VM960604CXA*	45,000	33,750	15.5	12.5	4653012
	CHPF4860D6D*+TXV	G*VM960805CXA*	45,000	33,750	16.0	13.0	4653076
	CHPF4860D6D*+TXV	G*VM960805DXA*	46,000	34,500	16.0	13.0	4653107
	CHPF4860D6D*+TXV	G*VM961005DXA*	45,000	33,750	16.0	13.0	4653060
	CHPF4860D6D*+TXV	G*VM961155DXA*	45,000	33,750	16.0	13.0	4653042
CHPF4860D6D*+TXV	GME950805CXA*	44,500	33,380	16.0	13.0	4701124	
CHPF4860D6D*+TXV	GME951005DXA*	45,000	33,750	15.5	12.5	4703721	
CSCF4860N6D*	A*VC80805C*B*	44,500	33,380	15.0	12.5	5368312	
CSCF4860N6D*	A*VC81005C*B*	44,500	33,380	15.0	12.5	5368322	
CSCF4860N6D*	A*VC950704CXA*	44,500	33,380	14.5	12.0	5368334	

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
	CSCF4860N6D*	A*VC950905CXA*	45,000	33,750	14.5	12.0	5368344
	CSCF4860N6D*	A*VC950905DXA*	44,500	33,380	15.0	12.5	5368354
	CSCF4860N6D*	A*VC951155DXA*	44,500	33,380	15.0	12.5	5368364
	CSCF4860N6D*	A*VM960604CXA*	44,500	33,380	14.5	12.0	5368375
	CSCF4860N6D*	A*VM960805CXA*	44,500	33,380	14.5	12.0	5368385
	CSCF4860N6D*	A*VM961005DXA*	44,500	33,380	15.0	12.5	5368396
	CSCF4860N6D*	A*VM961155DXA*	44,500	33,380	15.0	12.5	5368407
	CSCF4860N6D*	ADVC80805C*B*	44,000	33,000	15.0	12.5	5368414
	CSCF4860N6D*	ADVC81005C*B*	44,000	33,000	15.0	12.5	5368419
	CSCF4860N6D*	G*E80805C*B*	45,000	33,750	15.0	12.5	5368291
	CSCF4860N6D*	G*E81005C*B*	44,500	33,380	15.0	12.5	5368296
	CSCF4860N6D*	G*VC80805C*B*	44,500	33,380	15.0	12.5	5368313
	CSCF4860N6D*	G*VC81005C*B*	44,500	33,380	15.0	12.5	5368323
	CSCF4860N6D*	G*VC950704CXA*	44,500	33,380	14.5	12.0	5368335
	CSCF4860N6D*	G*VC950905CXA*	45,000	33,750	14.5	12.0	5368345
	CSCF4860N6D*	G*VC950905DXA*	44,500	33,380	15.0	12.5	5368355
	CSCF4860N6D*	G*VC951155DXA*	44,500	33,380	15.0	12.5	5368365
	CSCF4860N6D*	G*VM960604CXA*	44,500	33,380	14.5	12.0	5368376
	CSCF4860N6D*	G*VM960805CXA*	44,500	33,380	14.5	12.0	5368386
	CSCF4860N6D*	G*VM961005DXA*	44,500	33,380	15.0	12.5	5368397
	CSCF4860N6D*	G*VM961155DXA*	44,500	33,380	15.0	12.5	5368408
	CSCF4860N6D*	GME950805CXA*	44,000	33,000	15.0	12.5	5368424
	CSCF4860N6D*	GME951005DXA*	44,500	33,380	14.5	12.0	5368429
	CSCF4860N6D*+EEP		44,500	33,380	14.0	12.0	5368285
	CSCF4860N6D*+EEP+TXV		44,500	33,380	14.5	11.5	4767537
SSX16	CSCF4860N6D*+MBVC2000*-1A*		44,500	33,380	15.5	12.5	5368286
0481B*	CSCF4860N6D*+MBVC2000*-1A*+TXV		44,500	33,380	15.5	12.5	5368287
(cont.)	CSCF4860N6D*+TXV	A*VC80805C*B*	44,500	33,380	15.5	12.5	5368314
	CSCF4860N6D*+TXV	A*VC81005C*B*	44,500	33,380	15.5	12.5	5368324
	CSCF4860N6D*+TXV	A*VC950704CXA*	44,500	33,380	15.0	12.5	5368336
	CSCF4860N6D*+TXV	A*VC950905CXA*	45,000	33,750	14.5	12.0	5368346
	CSCF4860N6D*+TXV	A*VC950905DXA*	44,500	33,380	15.0	12.5	5368356
	CSCF4860N6D*+TXV	A*VC951155DXA*	44,500	33,380	15.5	12.5	5368366
	CSCF4860N6D*+TXV	A*VM960604CXA*	44,500	33,380	15.0	12.5	5368377
	CSCF4860N6D*+TXV	A*VM960805CXA*	44,500	33,380	14.5	12.0	5368387
	CSCF4860N6D*+TXV	A*VM961005DXA*	44,500	33,380	15.5	12.5	5368398
	CSCF4860N6D*+TXV	A*VM961155DXA*	44,500	33,380	15.5	12.5	5368409
	CSCF4860N6D*+TXV	ADVC80805C*B*	44,000	33,000	15.0	12.5	5368415
	CSCF4860N6D*+TXV	ADVC81005C*B*	44,000	33,000	15.0	12.5	5368420
	CSCF4860N6D*+TXV	G*E80805C*B*	45,000	33,750	15.5	12.5	5368292
	CSCF4860N6D*+TXV	G*E81005C*B*	44,500	33,380	15.5	12.5	5368297
	CSCF4860N6D*+TXV	G*VC80805C*B*	44,500	33,380	15.5	12.5	5368315
	CSCF4860N6D*+TXV	G*VC81005C*B*	44,500	33,380	15.5	12.5	5368325
	CSCF4860N6D*+TXV	G*VC950704CXA*	44,500	33,380	15.0	12.5	5368337
	CSCF4860N6D*+TXV	G*VC950905CXA*	45,000	33,750	16.0	13.0	4767538
	CSCF4860N6D*+TXV	G*VC950905DXA*	44,500	33,380	16.0	13.0	4767539
	CSCF4860N6D*+TXV	G*VC951155DXA*	44,500	33,380	16.0	13.0	4767540
	CSCF4860N6D*+TXV	G*VM960604CXA*	44,500	33,380	15.0	12.5	5368378
	CSCF4860N6D*+TXV	G*VM960805CXA*	44,500	33,380	14.5	12.0	5368388
	CSCF4860N6D*+TXV	G*VM961005DXA*	44,500	33,380	15.5	12.5	5368399
	CSCF4860N6D*+TXV	G*VM961155DXA*	44,500	33,380	15.5	12.5	5368410
	CSCF4860N6D*+TXV	GME950805CXA*	44,000	33,000	15.0	12.5	5368425
	CSCF4860N6D*+TXV	GME951005DXA*	44,500	33,380	15.0	12.5	5368430

See Notes on Page 52.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0591A*	AVPTC426014A*		56,500	38,990	15.5	12.7	4431281
	CA*F4860*6D*+MBVC2000**-1A*+TXV		55,500	38,300	15.5	12.7	3880346
	CA*F4860*6D*+TXV	A*VC950905CXA*	55,500	38,300	14.5	12.2	4201423
	CA*F4860*6D*+TXV	A*VC950905DXA*	55,500	38,300	15.0	12.5	3880596
	CA*F4860*6D*+TXV	A*VC950915DXA*	55,500	38,300	15.0	12.5	4202068
	CA*F4860*6D*+TXV	A*VC951155DXA*	55,000	37,950	14.5	12.2	3880597
	CA*F4860*6D*+TXV	A*VM960805CXA*	55,500	38,300	14.5	12.2	4653151
	CA*F4860*6D*+TXV	A*VM960805DXA*	55,500	38,300	15.0	12.5	4653155
	CA*F4860*6D*+TXV	A*VM961005DXA*	55,000	37,950	14.5	12.2	4653143
	CA*F4860*6D*+TXV	A*VM961155DXA*	55,000	37,950	14.5	12.2	4653139
	CA*F4860*6D*+TXV	G*E80805C*B*	54,500	37,610	14.5	12.0	5379181
	CA*F4860*6D*+TXV	G*E81005C*B*	54,500	37,610	14.5	12.0	5379178
	CA*F4860*6D*+TXV	G*VC950905CXA*	55,500	38,300	14.5	12.2	4201424
	CA*F4860*6D*+TXV	G*VC950905DXA*	55,500	38,300	15.0	12.5	3880600
	CA*F4860*6D*+TXV	G*VC950915DXA*	55,500	38,300	15.0	12.5	4202069
	CA*F4860*6D*+TXV	G*VC951155DXA*	55,000	37,950	14.5	12.2	3880601
	CA*F4860*6D*+TXV	G*VM960805CXA*	55,500	38,300	14.5	12.2	4653152
	CA*F4860*6D*+TXV	G*VM960805DXA*	55,500	38,300	15.0	12.5	4653156
	CA*F4860*6D*+TXV	G*VM961005DXA*	55,000	37,950	14.5	12.2	4653142
	CA*F4860*6D*+TXV	G*VM961155DXA*	55,000	37,950	14.5	12.2	4653138
	CA*F4860*6D*+TXV	GME950805CXA*	55,500	38,300	14.5	12.2	4701091
	CA*F4860*6D*+TXV	GME951005DXA*	54,500	37,610	14.5	12.2	4703724
	CA*F4961*6D*+EEP+TXV		56,500	38,990	14.5	12.2	4906888
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	39,330	16.0	13.0	4431680
	CA*F4961*6D*+TXV	A*VC80805C*B*	56,000	38,640	15.5	12.5	5039080
	CA*F4961*6D*+TXV	A*VC81005C*B*	56,000	38,640	15.5	12.5	5039087
	CA*F4961*6D*+TXV	A*VC950905CXA*	56,000	38,640	15.5	12.7	4431829
	CA*F4961*6D*+TXV	A*VC950905DXA*	56,000	38,640	15.5	12.7	4431830
	CA*F4961*6D*+TXV	A*VC950915DXA*	56,000	38,640	15.5	12.7	4431831
	CA*F4961*6D*+TXV	A*VC951155DXA*	56,000	38,640	15.5	12.7	4431832
	CA*F4961*6D*+TXV	A*VM960805CXA*	56,000	38,640	15.5	12.7	4653222
	CA*F4961*6D*+TXV	A*VM960805DXA*	56,000	38,640	15.5	12.7	4653236
	CA*F4961*6D*+TXV	A*VM961005DXA*	56,000	38,640	15.5	12.7	4653200
	CA*F4961*6D*+TXV	A*VM961155DXA*	56,000	38,640	15.5	12.7	4653172
	CA*F4961*6D*+TXV	ADVC80805C*B*	56,000	38,640	15.5	12.5	5038905
	CA*F4961*6D*+TXV	ADVC81005C*B*	56,000	38,640	15.5	12.5	5039088
	CA*F4961*6D*+TXV	G*E80805C*B*	56,000	38,640	15.0	12.5	5379180
	CA*F4961*6D*+TXV	G*E81005C*B*	56,000	38,640	15.0	12.5	5379177
	CA*F4961*6D*+TXV	G*VC80805C*B*	56,000	38,640	15.5	12.5	5039089
	CA*F4961*6D*+TXV	G*VC81005C*B*	56,000	38,640	15.5	12.5	5039200
	CA*F4961*6D*+TXV	G*VC950905CXA*	56,000	38,640	15.5	12.7	4431838
	CA*F4961*6D*+TXV	G*VC950905DXA*	56,000	38,640	15.5	12.7	4431839
	CA*F4961*6D*+TXV	G*VC950915DXA*	56,000	38,640	15.5	12.7	4431840
	CA*F4961*6D*+TXV	G*VC951155DXA*	56,000	38,640	15.5	12.7	4431841
	CA*F4961*6D*+TXV	G*VM960805CXA*	56,000	38,640	15.5	12.7	4653223
	CA*F4961*6D*+TXV	G*VM960805DXA*	56,000	38,640	15.5	12.7	4653237
CA*F4961*6D*+TXV	G*VM961005DXA*	56,000	38,640	15.5	12.7	4653201	
CA*F4961*6D*+TXV	G*VM961155DXA*	56,000	38,640	15.5	12.7	4653173	
CA*F4961*6D*+TXV	GME950805CXA*	56,000	38,640	15.5	12.7	4701096	
CA*F4961*6D*+TXV	GME951005DXA*	56,000	38,640	15.5	12.7	4701097	
CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	39,330	16.0	13.0	3835281	
CHPF4860D6D*+TXV	A*VC80805C*B*	56,000	38,640	15.5	12.5	5039218	

See Notes on Page 52.

## AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING CAPACITY (BTU/H)				AHRI #
	AIR HANDLERS/ BLOWERS / COILS	FURNACES	TOTAL	SENSIBLE	SEER <sup>1</sup>	EER <sup>2</sup>	
SSX16 0591A* (cont.)	CHPF4860D6D*+TXV	A*VC81005C*B*	56,000	38,640	15.5	12.5	5039277
	CHPF4860D6D*+TXV	A*VC950905CXA*	56,500	38,990	15.0	12.5	4201427
	CHPF4860D6D*+TXV	A*VC950905DXA*	56,500	38,990	15.5	12.7	3835289
	CHPF4860D6D*+TXV	A*VC951155DXA*	56,500	38,990	15.0	12.5	3835290
	CHPF4860D6D*+TXV	A*VM960805CXA*	56,500	38,990	15.0	12.5	4653276
	CHPF4860D6D*+TXV	A*VM960805DXA*	56,500	38,990	15.5	12.7	4653291
	CHPF4860D6D*+TXV	A*VM961005DXA*	56,500	38,990	15.0	12.5	4653263
	CHPF4860D6D*+TXV	A*VM961155DXA*	56,500	38,990	15.0	12.5	4653257
	CHPF4860D6D*+TXV	ADVC80805C*B*	56,000	38,640	15.5	12.5	5039276
	CHPF4860D6D*+TXV	ADVC81005C*B*	56,000	38,640	15.5	12.5	5039219
	CHPF4860D6D*+TXV	G*E80805C*B*	54,500	37,610	15.0	12.5	5379182
	CHPF4860D6D*+TXV	G*E81005C*B*	54,500	37,610	14.5	12.0	5379179
	CHPF4860D6D*+TXV	G*VC80805C*B*	56,000	38,640	15.5	12.5	5038931
	CHPF4860D6D*+TXV	G*VC81005C*B*	56,000	38,640	15.5	12.5	5039009
	CHPF4860D6D*+TXV	G*VC950905CXA*	56,500	38,990	15.0	12.5	4201428
	CHPF4860D6D*+TXV	G*VC950905DXA*	56,500	38,990	15.5	12.7	3835301
	CHPF4860D6D*+TXV	G*VC951155DXA*	56,500	38,990	15.0	12.5	3835302
	CHPF4860D6D*+TXV	G*VM960805CXA*	56,500	38,990	15.0	12.5	4653277
	CHPF4860D6D*+TXV	G*VM960805DXA*	56,500	38,990	15.5	12.7	4653292
	CHPF4860D6D*+TXV	G*VM961005DXA*	56,500	38,990	15.0	12.5	4653264
	CHPF4860D6D*+TXV	G*VM961155DXA*	56,500	38,990	15.0	12.5	4653258
	CHPF4860D6D*+TXV	GME950805CXA*	56,500	38,990	15.0	12.5	4701125
	CHPF4860D6D*+TXV	GME951005DXA*	56,000	38,640	15.0	12.5	4703725
	CSCF4860N6D*+TXV	G*E80805C*B*	54,500	37,610	15.0	12.5	5379184
CSCF4860N6D*+TXV	G*E81005C*B*	54,500	37,610	15.0	12.5	5379183	


<sup>1</sup> Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

<sup>2</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay


**DIMENSIONS**

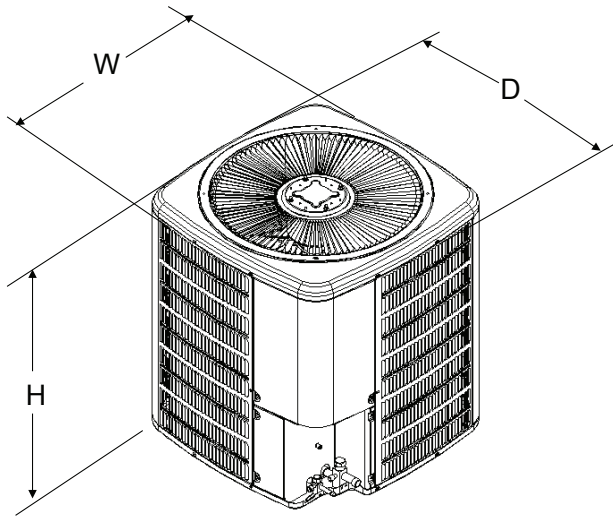

MODEL	DIMENSIONS		
	W"	D"	H"
SSX160241A*	29	29	38 $\frac{1}{4}$
SSX160241B*	29	29	32 $\frac{1}{4}$
SSX160301A*	29	29	32 $\frac{1}{4}$
SSX160361A*	29	29	38 $\frac{1}{4}$
SSX160361B*	29	29	32 $\frac{1}{4}$
SSX160421A*	29	29	36 $\frac{1}{4}$
SSX160481A*	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$
SSX160481B*	35 $\frac{1}{2}$	35 $\frac{1}{2}$	36 $\frac{1}{4}$
SSX160591A*	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$
SSX160601A*	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$
SSX160601B*	35 $\frac{1}{2}$	35 $\frac{1}{2}$	38 $\frac{1}{4}$



# WIRING DIAGRAM — SSX160241\*\* - 481\*\*

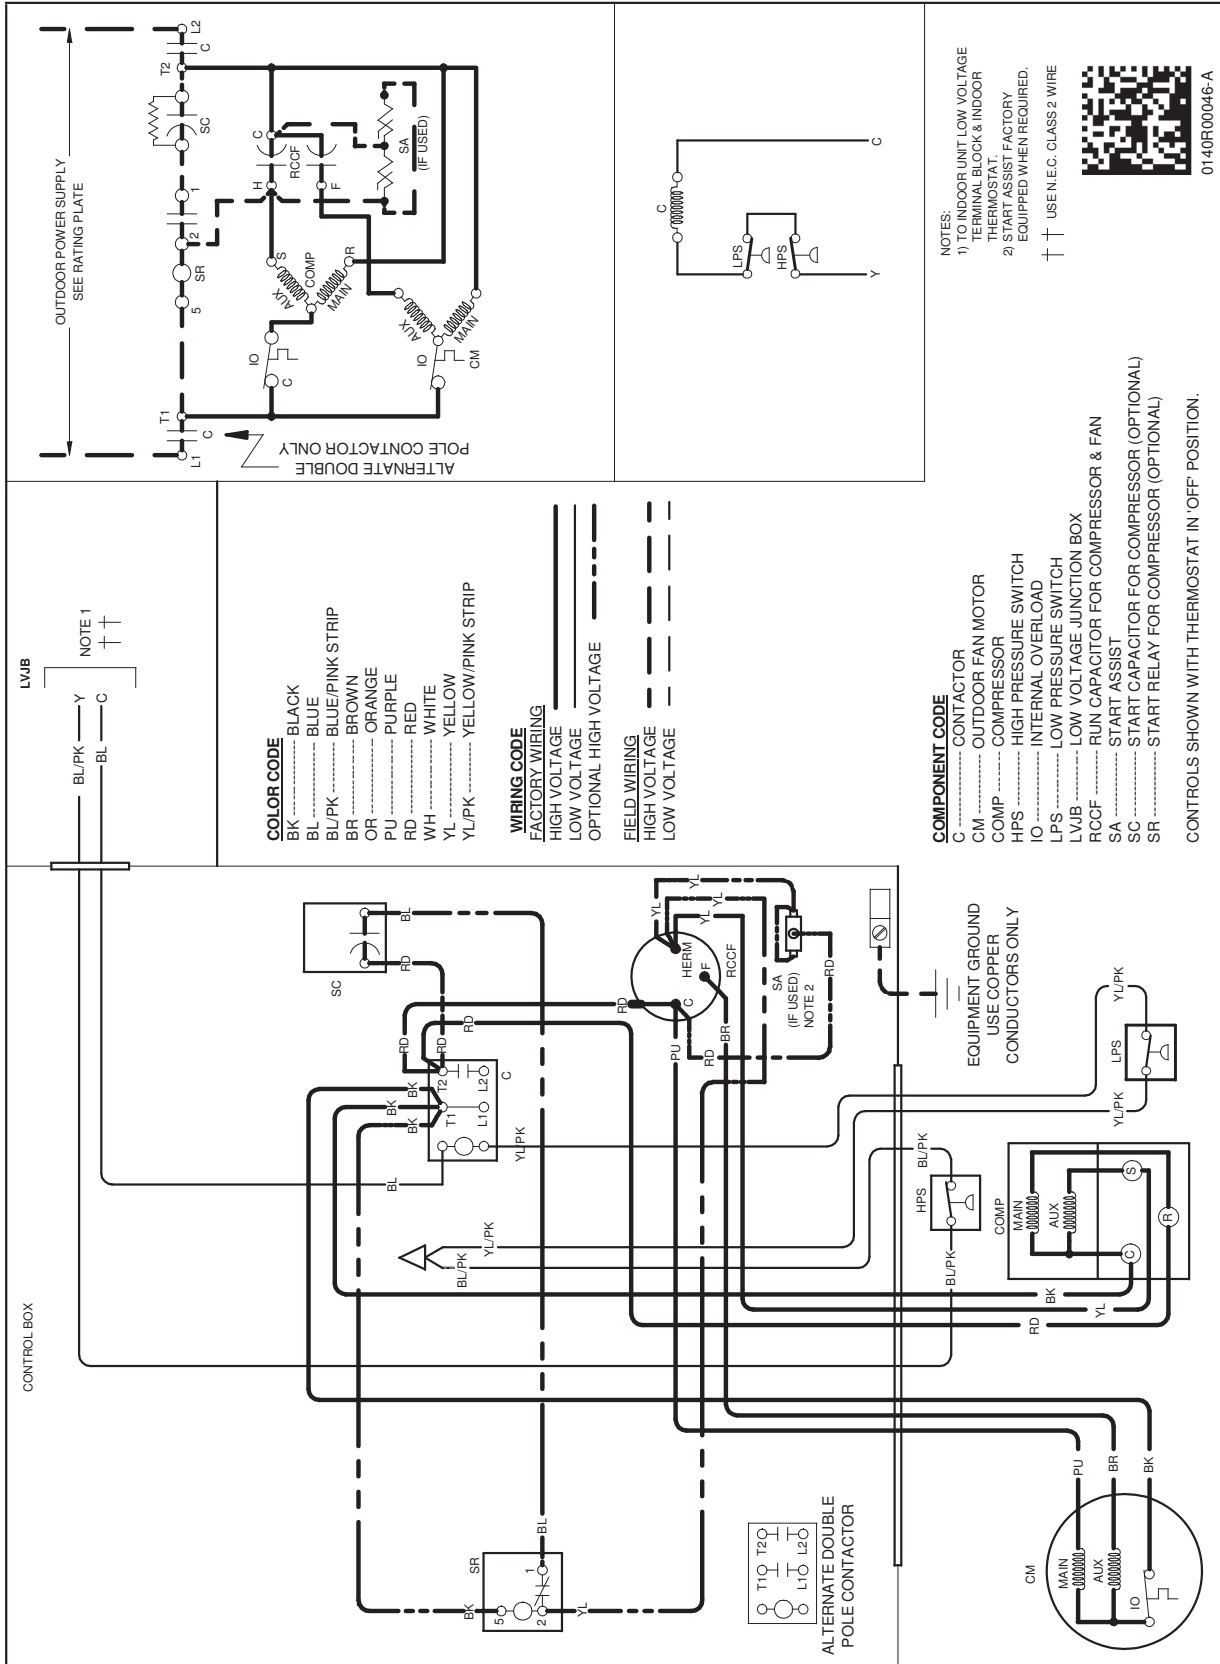


**WARNING**

⚡

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

# WIRING DIAGRAM — SSX160591\*\*

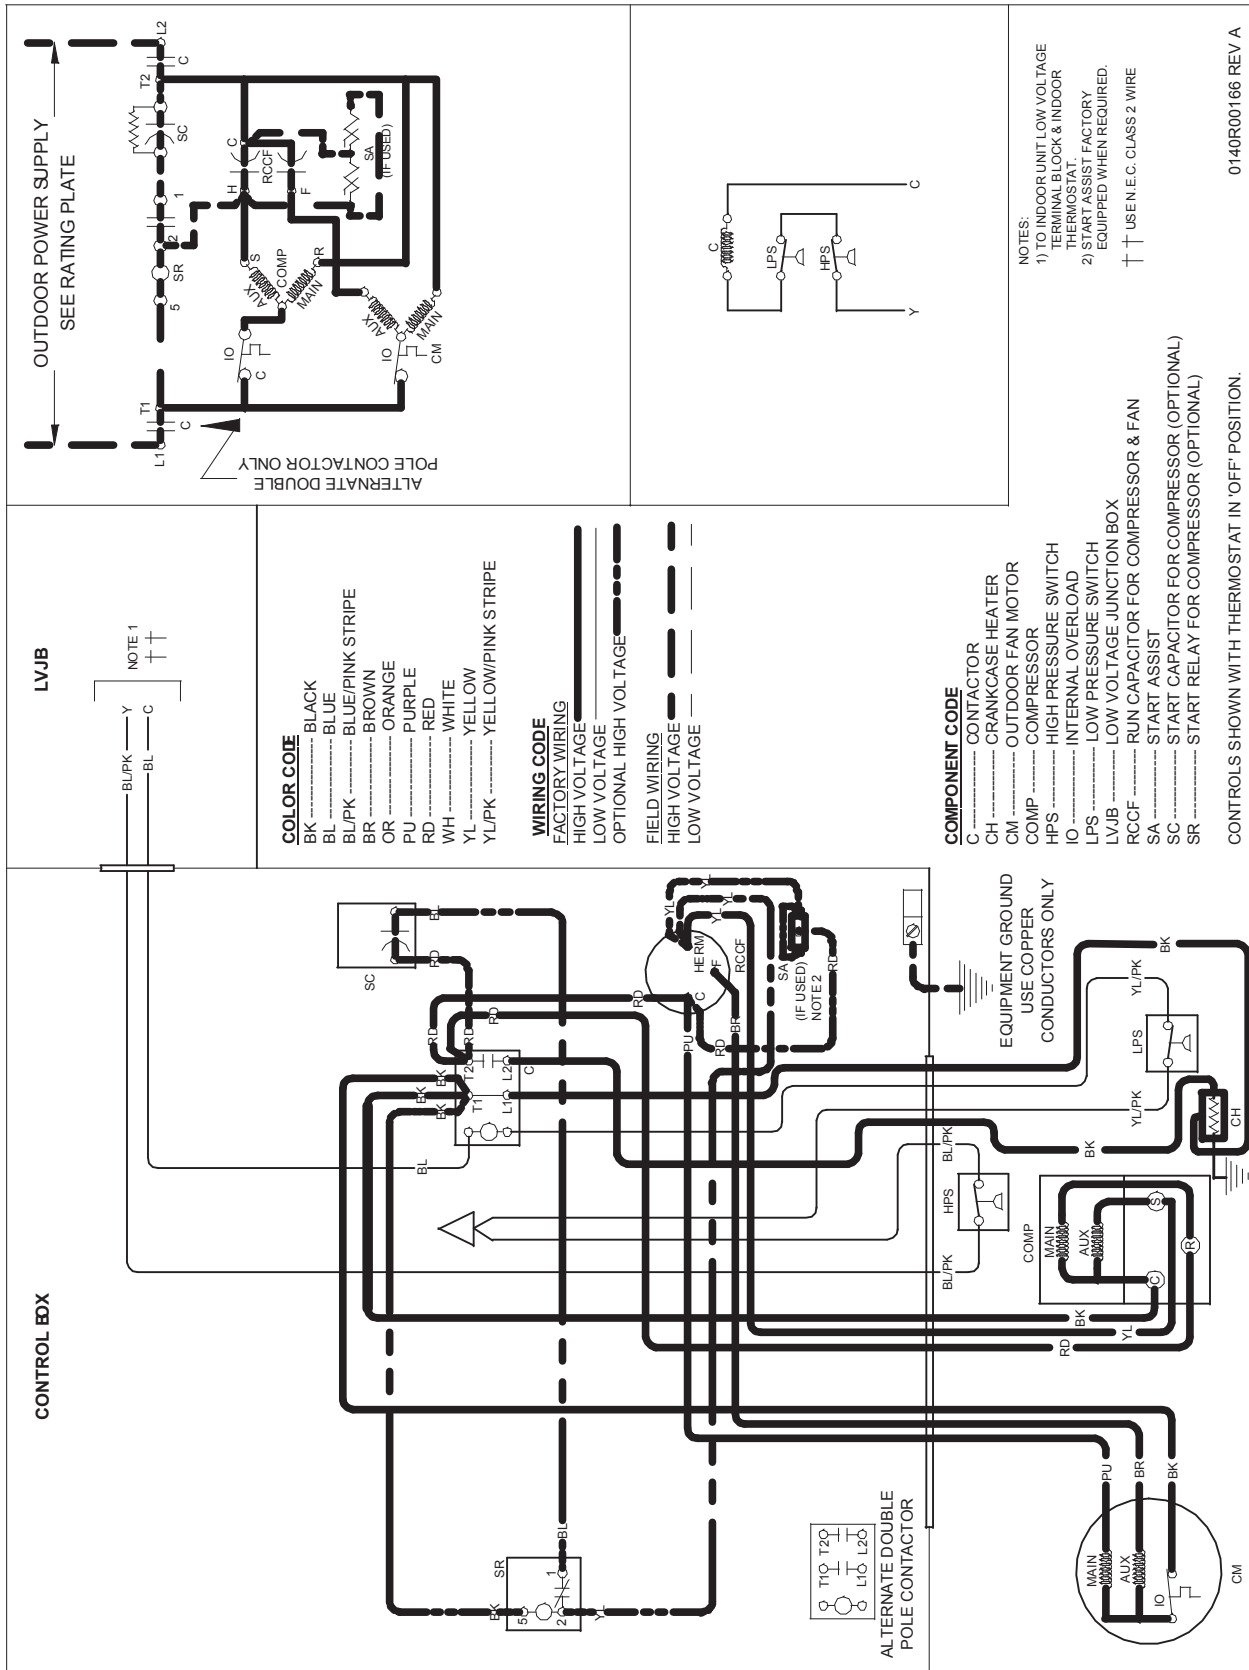

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

ACCESSORIES

MODEL	DESCRIPTION	SSX16 024*	SSX16 030*	SSX16 036*	SSX16 042*	SSX16 048*	SSX16 059*	SSX16 060*
0163R00003	Crankcase Heater						X	
ABK-20	Anchor Bracket Kit ^	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X				
CSR-U-2	Hard-start Kit			X	X	X	X	X
CSR-U-3	Hard-start Kit					X	X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat / Lockout Stat	X	X	X	X	X	X	X
TX2N4 <sup>2</sup>	TXV Kit	X						
TX2N4A <sup>2</sup>	TXV Kit	X						
TX3N4 <sup>2</sup>	TXV Kit		X	X				
TX5N4 <sup>2</sup>	TXV Kit				X	X	X	X

^ Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device. The TXV should always be sized based on the tonnage of the outdoor unit.