



- G1512** 10 Gallon Portable Eyewash/Drench Hose Unit
- G1511** 10 Gallon Portable Eyewash Unit

APPLICATION: Self-contained eyewash and/or drench hose units are ideal where a continuous supply of potable water is not available. These units may be used in low traffic areas, low hazard areas or where installation of plumbed equipment is not cost effective. Ten gallon units provide approximately 8.3 usable gallons (31.4 liters) of water for effective rinsing of eyes, face or body. *Note that, under ANSI Z358.1-2004, drench hose units supplement but do not replace other types of emergency equipment.*

TANK: 10 gallon stainless steel pressurized tank. Tank has built-in carrying handles, air intake fitting, pressure gauge and pressure relief valve. Tank has approximately 8.3 gallons (31.4 liters) usable capacity.

EYEWASH UNIT: Two GS-Plus spray heads, each with a “flip top” dust cover, internal flow control and filter. 1/2” IPS chrome plated brass stay-open ball valve with flag handle. Eyewash delivers 0.5 GPM for 15 minutes.

DRENCH HOSE: Single GS-Plus spray head with “flip top” dust cover, internal flow control and filter. Chrome plated brass squeeze valve with stainless steel lever handle and 6 ft. reinforced PVC hose.

OPERATION: To operate unit, fill with clean potable water and add bacteriostatic additive (supplied with unit). Additive protects against growth of bacteria, fungus, algae and acanthamoeba inside unit. After filling with water, pressurize unit to 95 PSI air pressure. Unit should be inspected regularly and water in unit should be changed at least once every six months.

WEIGHT: 22 lbs. empty, 91 lbs. filled.

QUALITY ASSURANCE: Unit is completely assembled, pressurized and water tested prior to shipment.

Available Options

- G1540BA** 8 oz. bottle of bacteriostatic additive to protect against growth of bacteria and other impurities in portable unit.
- ASME** ASME-rated stainless steel tank.
- HC** Two wheel hand cart for transporting and storing unit.






□ **G1512** 10 Gallon Portable Eyewash/Drench Hose Unit

□ **G1511** 10 Gallon Portable Eyewash Unit

NOTE:

EACH GS-PLUS SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

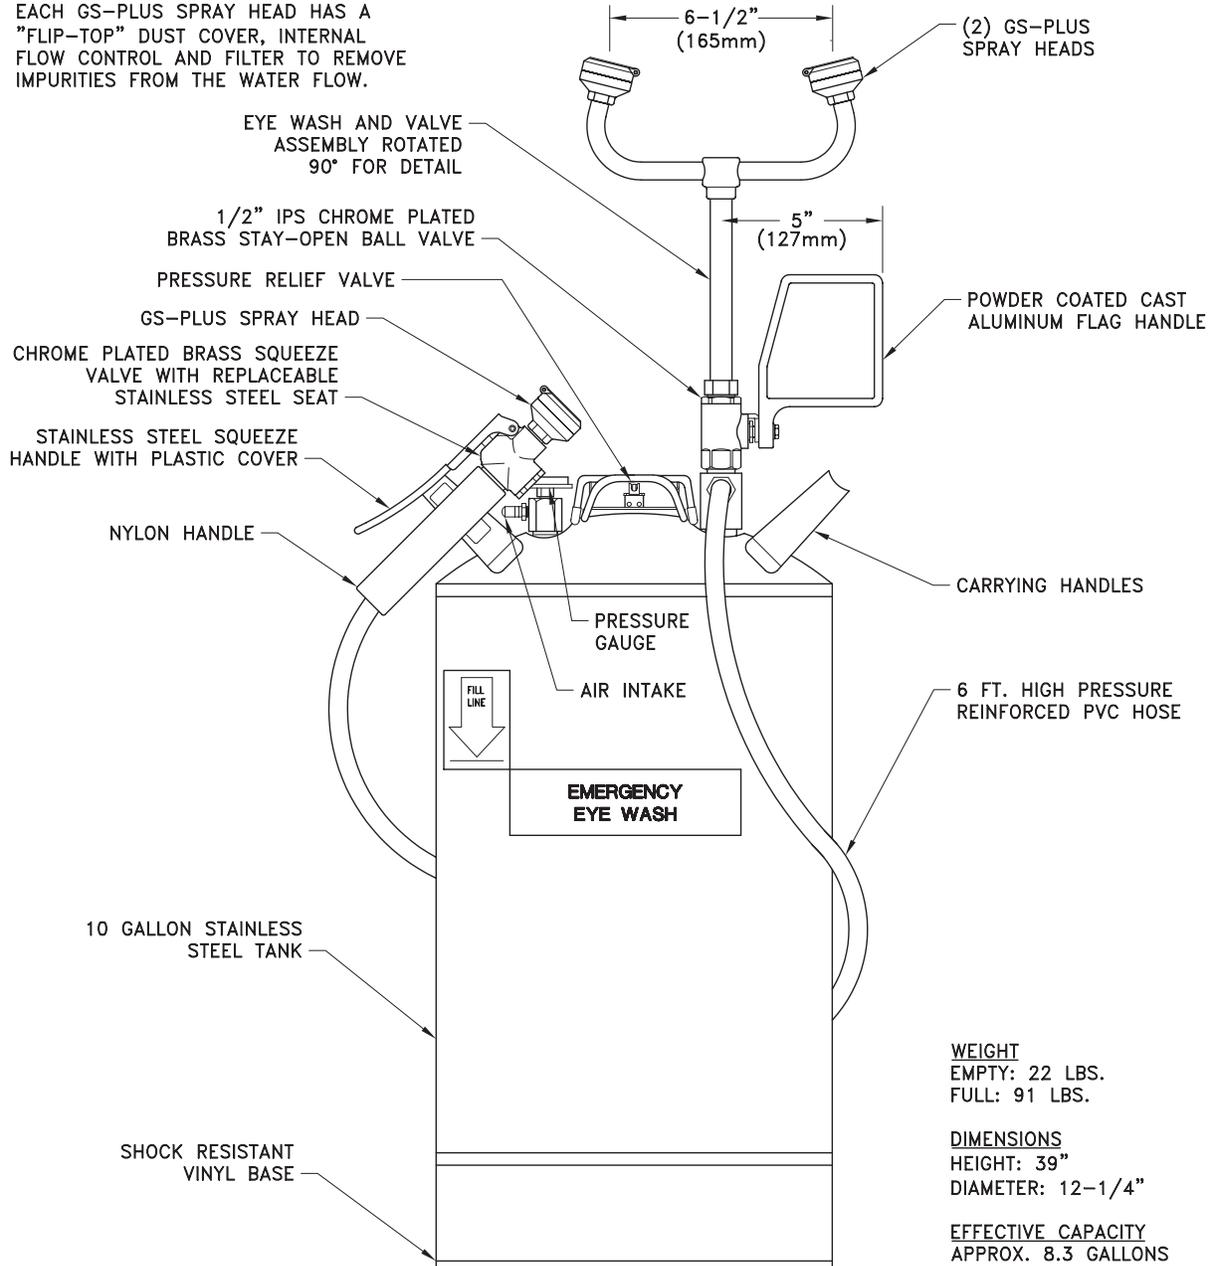

WEIGHT
EMPTY: 22 LBS.
FULL: 91 LBS.

DIMENSIONS
HEIGHT: 39"
DIAMETER: 12-1/4"

EFFECTIVE CAPACITY
APPROX. 8.3 GALLONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0308

Sign Included

