


## Integrity<sup>®</sup> Collection Specifications

### Whirlpool & Soaking - B3660

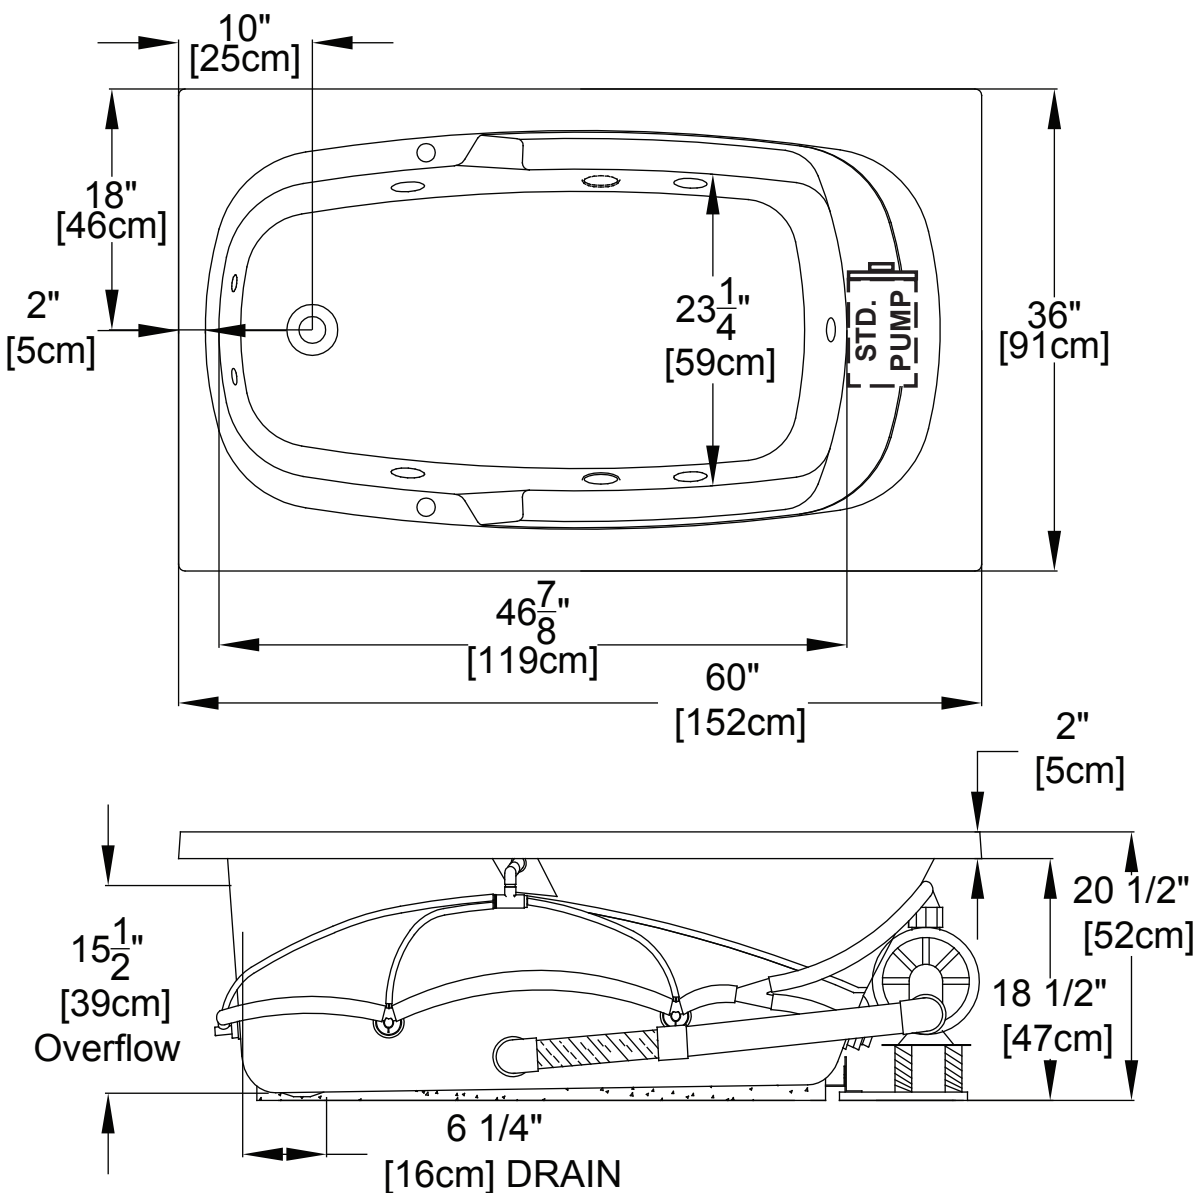


Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

Drop-in-Hole Size:	34" x 58"
Operating Capacity:	37 Gal.
Overflow Capacity:	56 Gal.
Floor Loading / sq.ft. (WP/ Soaking):	46.6/ 43.9 lbs.
Carton Wt. (WP/Soaking):	101/69 lbs.
Cube:	31.3 ft. <sup>3</sup>

Air Switch  
Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*