


Integrity[®] Collection Specifications

B3660-SL/SR

AirMasseur[®]

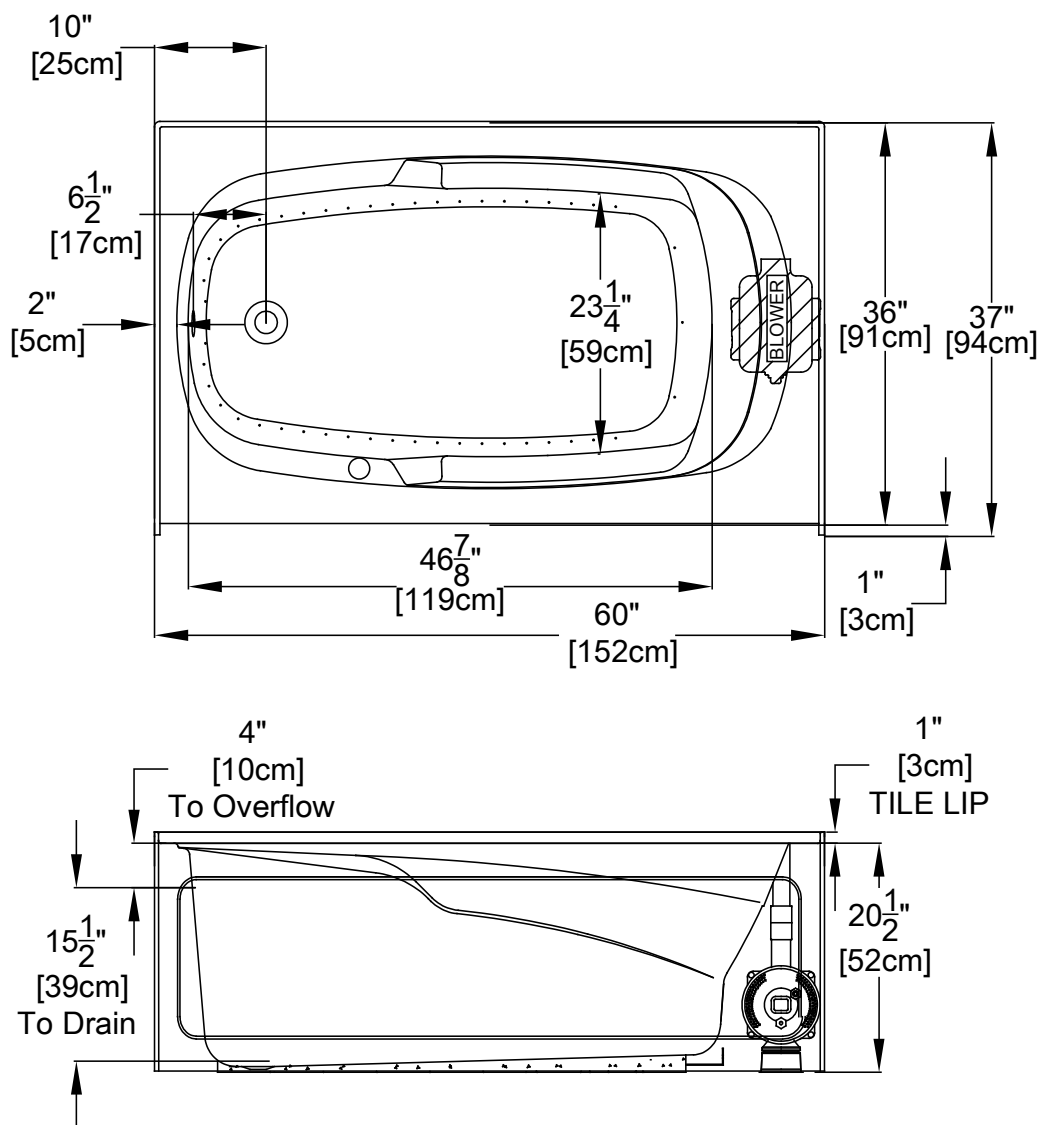


Patents received or pending.

Note: Control Air Switch will be opposite the tile lip.

Note: Dimensional Tolerances: $\pm 1/4"$

Air Switch
Control



Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.

Drop-in-Hole Size:	N/A
Operating Capacity:	37 Gal.
Overflow Capacity:	56 Gal.
Floor Loading / sq.ft.:	49lbs.
Carton Weight:	125 lbs.
Cube:	31.3 ft. ³

Construction: Reinforced Acrylic shell mounted on Level Form[™] pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.