

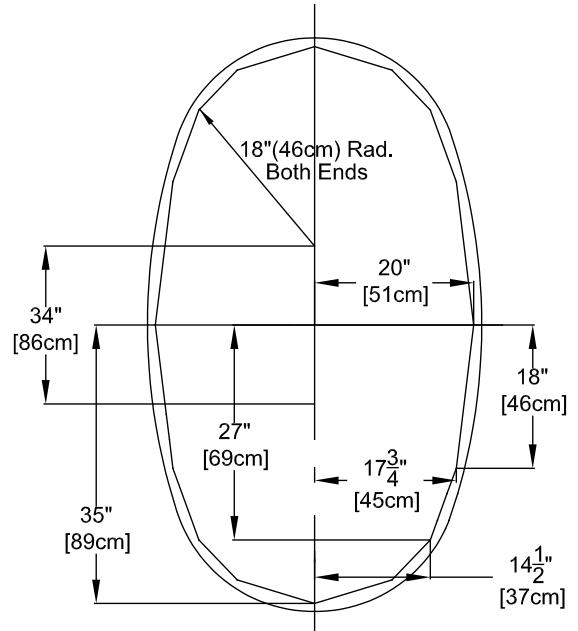


## Integrity<sup>®</sup> Collection Specifications

### Whirlpool & Soaking - N4272

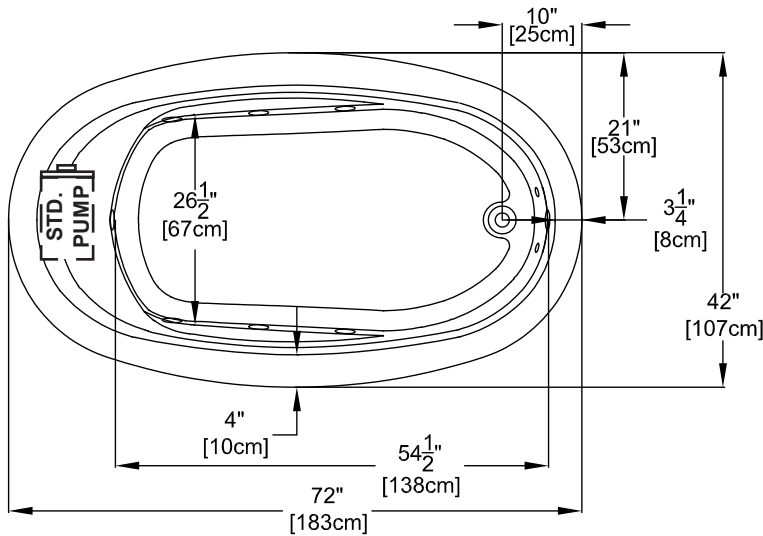

DROP-IN HOLE SIZE

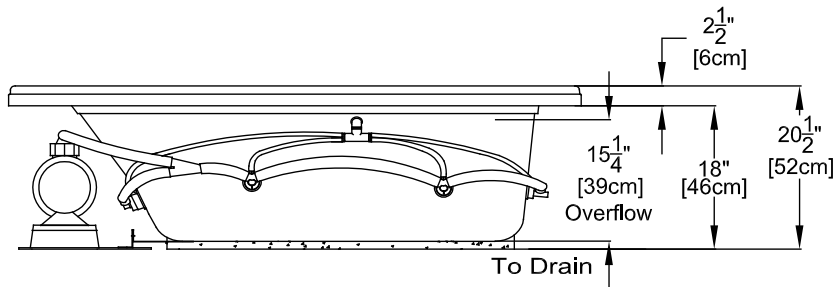

Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

**Note:** The blower extends approximately 1" past the end radius of the bath. This requires angling the bath into the drop-in hole.

**Drop-in-Hole Size:**

**Operating Capacity:**

**Overflow Capacity:**

**Floor Loading / sq.ft. (WP/ Soaking):**

**Carton Wt. (WP/Soaking):**

**Cube:**

See Diagram

52 Gal.


80 Gal.

46.4/ 44.9 lbs.

125/ 102 lbs.

43.2 ft.<sup>3</sup>

Air Switch  
Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*