

34710 SERIES

APPLICATION

For use in extra heavy traffic areas, such as parking decks, industrial plants or loading docks, for any type of floor construction where a heavy flow of liquid is anticipated.

SPECIFICATION

JOSAM 34710 Series coated cast iron Floor Drain with two-piece body, WEJLOC® non-puncturing flashing clamp collar, double drainage flange, weepholes, bottom outlet, round top, extra heavy-duty, loose-set grate.

Available Options

- -AE LEVELEZE® Adjustable Extension
- -7 Ductile Iron Grate
- -15 Chained Grate
- -VP Secured Grate, Vandal-Proof Screws
- -19 C.I. Undergrate with Satin Finish Nikaloy Top
- -20 C.I. Undergrate with Satin Finish Bronze Top
- -49 3/4" Primer Tap


- -50 1/2" Primer Tap
- -88 Supplementary Strainer
- -92 Galvanized Cast Iron Parts
- -ARE Acid-Resisting Epoxy

OUTLETS:

- -T Threaded Outlet
- -X Inside Caulk Outlet
- -Y Hub Outlet with Gasket, 4"
- -Z No-Hub Outlet

15" EXTRA HEAVY-DUTY TOP

1-1/16" SQ. HOLES.

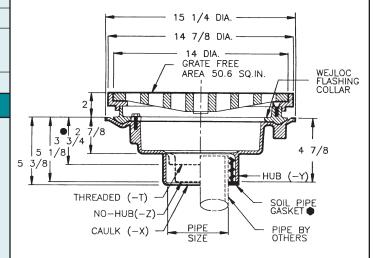

CONFORMS WITH ASTM-C564.THIS DIM. IS 5-3/4" FOR 34718-T.

FOR OUTLET TYPE SPECIFY -T, -X, -Y or -Z				
TYPE NO.	PIPE SIZE	LBS.		
34714	4	73		
34715	5	73		
34716	6	74		
34718	8	76		

34720 SERIES

15" EXTRA HEAVY-DUTY TOP WITH BUCKET

APPLICATION

For use in extra heavy traffic areas, such as industrial plants or loading docks, for any type of floor construction where a heavy flow of liquid is anticipated and a bucket is necessary to collect debris which may clog the waste line.

SPECIFICATION

JOSAM 34720 Series coated cast iron Floor Drain with two-piece body, double drainage flange, WEJLOC® non-puncturing flashing clamp collar, weepholes, bottom outlet, round top, removable sediment bucket, loose-set extra heavy-duty grate.

Available Options


- -7 Ductile Iron Grate
- -15 Chained Grate
- -VP Secured Grate, Vandal-Proof Screws
- -19 C.I. Undergrate with Satin Finish Nikaloy Top
- -20 C.I. Undergrate with Satin Finish Bronze Top
- -49 3/4" Primer Tap

- -50 1/2" Primer Tap
- -84 Stainless Steel Mesh Bucket Liner
- -88 Supplementary Strainer
- -92 Galvanized Cast Iron Parts

OUTLETS:

- -66 No-Hub Side Outlet
- -X Inside Caulk Outlet
- -Z No-Hub Outlet

1-1/16" SQ. HOLES.

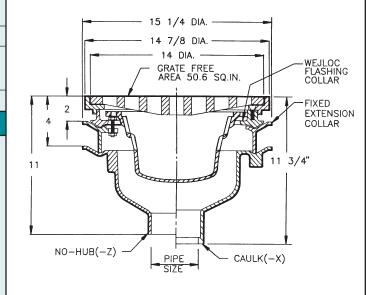

FOR OUTLET TYPE SPECIFY X or -Z				
TYPE N	NO. P	IPE SIZE	LBS.	
3472	3	3	80	
3472	4	4	81	
3472	5	5	82	
3472	6	6	83	