

Features

- Metal construction
- Available in traditional or contemporary styling
- Electronic infrared sensor with TriPoint™ technology for accurate activation
- Below-counter battery and valve location
- Operated by a 2CR5 6 V lithium-ion battery
- 34" (86.4 cm) flexible supply hose from the base of the faucet to the valve outlet
- Single-hole mounting
- 4" (10.2 cm) spout reach
- 1.5 gallons (5.7 liters) per minute maximum flow rate


**TOUCHLESS FAUCET
K-10103
ALSO K-10104**

ADA

Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- All applicable US Federal and State material regulations

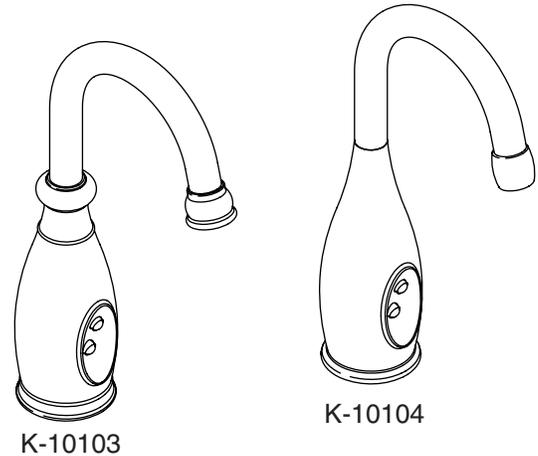

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes
K-10103	Touchless faucet – traditional design	<input type="checkbox"/> CP <input type="checkbox"/> Other ____
K-10104	Touchless faucet – contemporary design	<input type="checkbox"/> CP <input type="checkbox"/> Other ____

PRODUCT SPECIFICATION


The touchless faucet shall be of metal construction. Product shall feature a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature electronic infrared sensor with TriPoint technology for accurate activation. Product shall feature below-counter battery and valve location, 34" (86.4 cm) flexible supply hose from the base of the faucet to the valve outlet, and 4" (10.2 cm) spout reach. Product shall be operated by a 2CR5 6 V lithium-ion battery. Product shall be for single-hole mounting. Product shall be available in traditional or contemporary styling. Touchless faucet shall be Kohler Model K-____-____.

WELLSPRING®

Installation Notes

Install this product according to the installation guide.

Product requires a 2CR5 6 V lithium-ion battery (supplied) to operate.

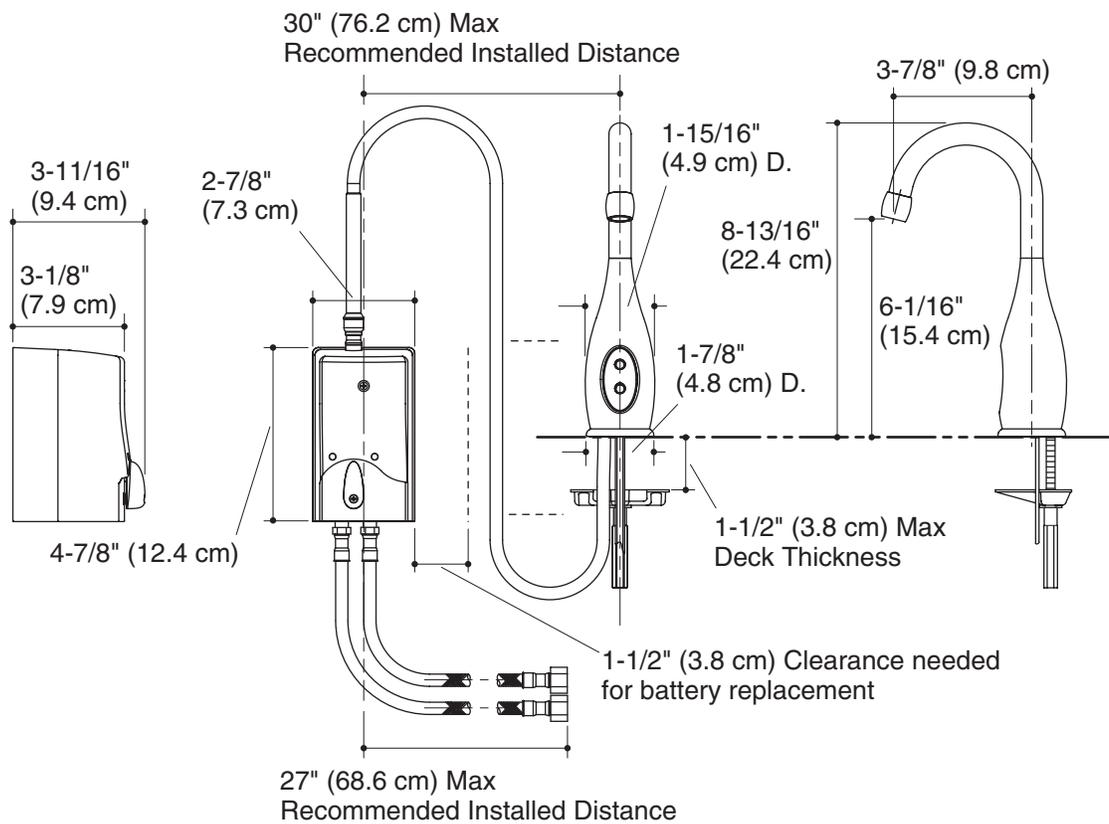

Product Diagram