

Features

- Metal construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- Pop-up drain with tailpiece
- Flexible connections for easy installation
- For 8" (203 mm) or 16" (406 mm) centers
- 5-1/8" (130 mm) spout reach
- Stationary spout
- 1.5 gallons (5.7 liters) per minute maximum flow rate

WIDESPREAD BATHROOM SINK FAUCET K-10272 ALSO K-10273


ADA CSA B651 OBC



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- EPA WaterSense®
- All applicable US Federal and State material regulations

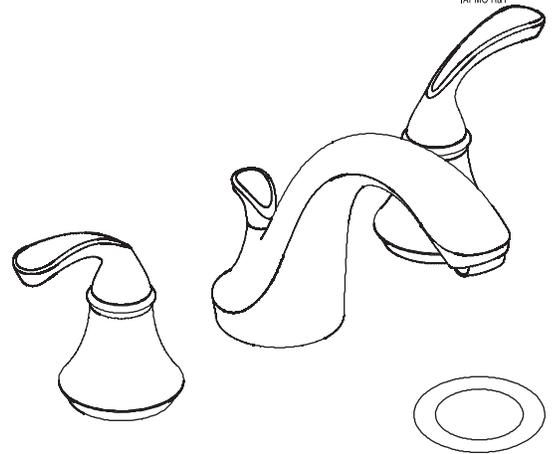

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Sculpted Handle		Traditional Handle	
		 ADA CSA B651 OBC	<input type="checkbox"/> CP <input type="checkbox"/> Other ____	 ADA CSA B651 OBC	<input type="checkbox"/> CP <input type="checkbox"/> Other ____
K-10272-4	Widespread bathroom sink faucet – metal drain (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____		
K-10272-4A	Widespread bathroom sink faucet – metal drain			<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
K-10273-4	Widespread bathroom sink faucet – plastic drain (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____		
K-10273-4A	Widespread bathroom sink faucet – plastic drain			<input type="checkbox"/> CP	<input type="checkbox"/> Other ____

Product Specification

The two-handle widespread bathroom sink faucet shall be of metal construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 L) per minute. Product shall feature quarter-turn washerless ceramic disc valves, flexible connections for easy installation, stationary spout, a 5-1/8" (130 mm) spout reach, pop-up drain with lift rod and tailpiece, and be for 8" (203 mm) or 16" (406 mm) centers. Faucet shall be Kohler Model K-____-____.


FORTÉ®

Optional Accessories		
1160595	Medium Spray 0.35 gpm (1.32 lpm) – Insert only	<input type="checkbox"/> NA
_____	Additional flow options are available (refer to the Price Book)	<input type="checkbox"/> NA

Installation Notes

Install this product according to the installation guide.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

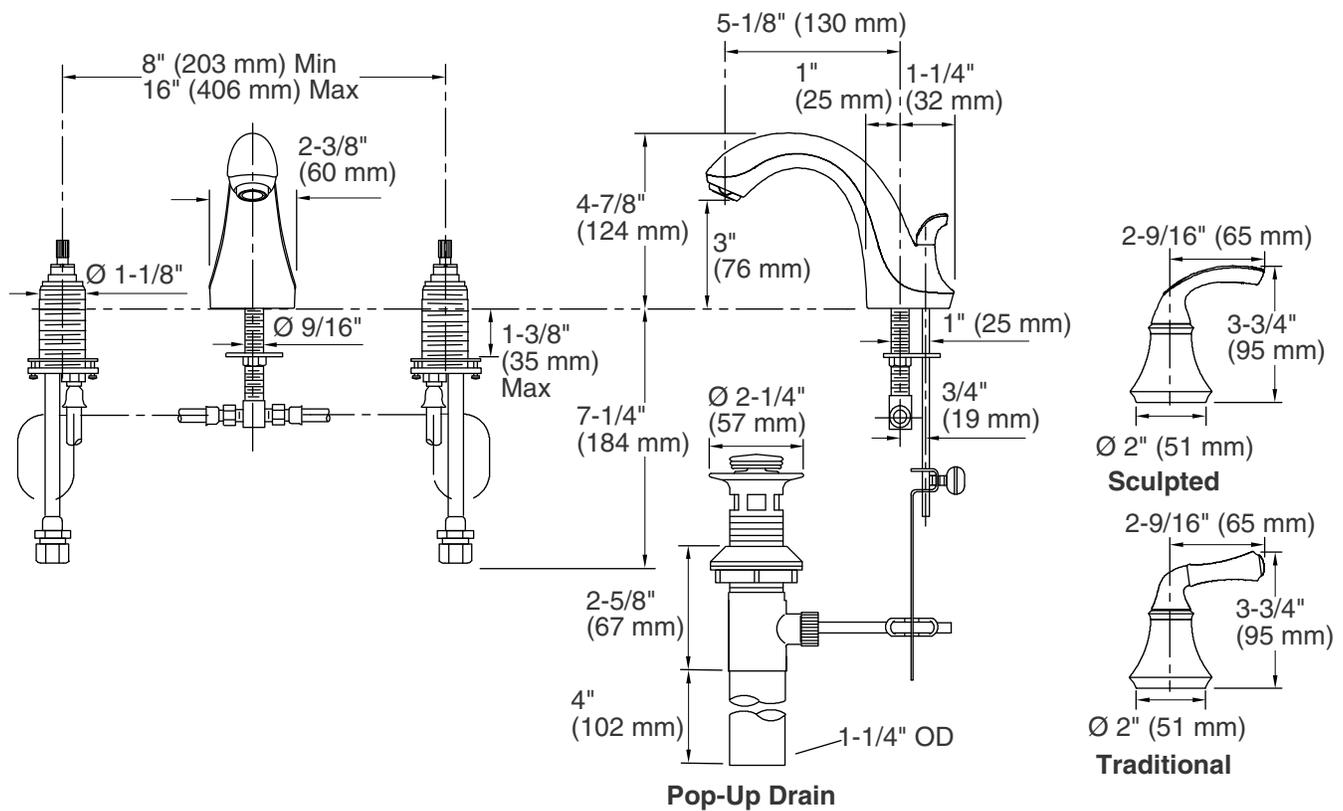

Product Diagram