

Features

- Brass construction
- Fixture-mount design
- Intended for urinal installations with 3/4 " spud coupling connection
- Includes a 9V lithium battery
- Retrofit models require a control stop and vacuum breaker
- Slow-closing piston technology
- Electronic infrared sensor with WAVE technology for accurate activation
- 0.125 gpf (0.47 lpf) flow rate
- WaterSense® compliant when used with K-4904-ET urinal



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

ASSE 1037

DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

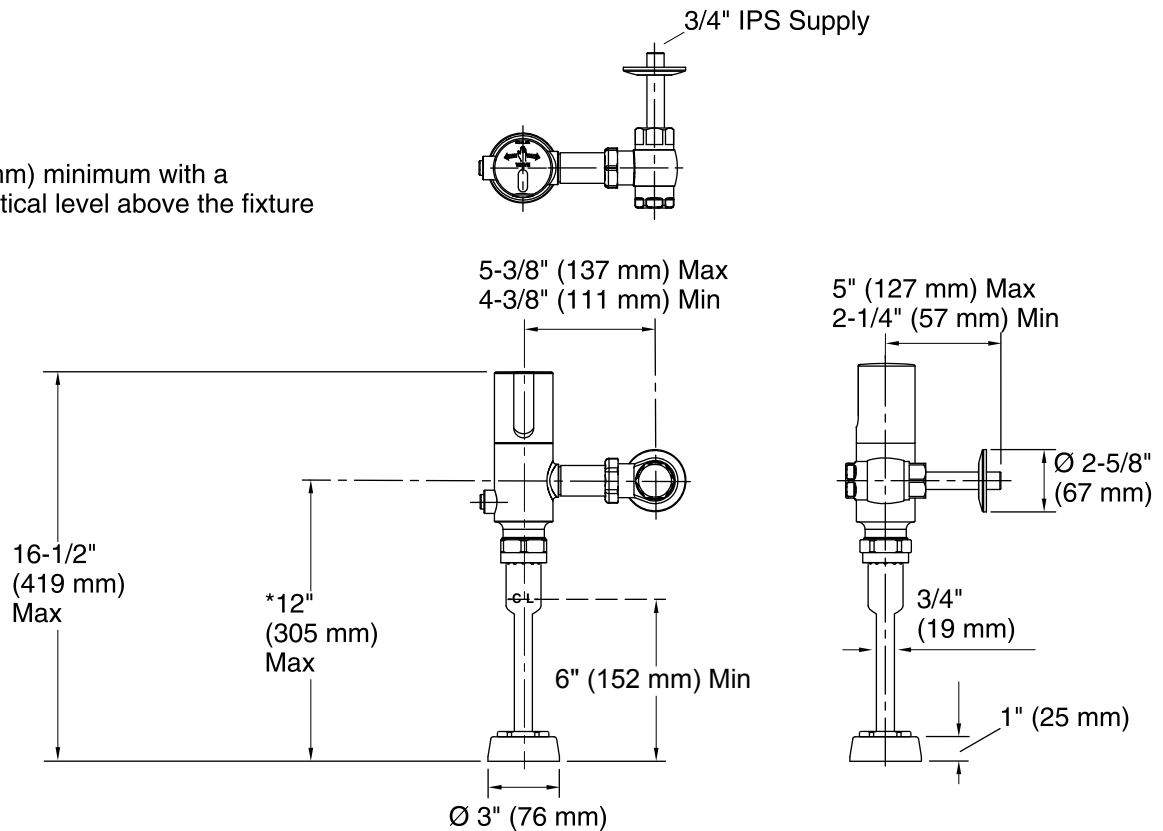

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 0.125 gal/min (0.5 l/min)
Pressure: 80 psi (5.5 bar)
Power source: 9V, included

Notes

Install this product according to the installation guide.

IMPORTANT! Maintain a 6" (152 mm) minimum critical level above the fixture to prevent back-siphonage.

Operating pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.