


# Roughing-In Guide

## Acrylic Bath Whirlpool with Spa/Massage Package

K-1110

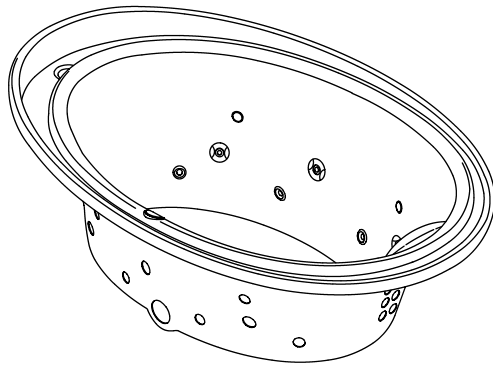

USA: 1-800-4-KOHLER  
Canada: 1-800-964-5590  
Mexico: 001-877-680-1310  
kohler.com

THE BOLD LOOK  
OF **KOHLER**®

# Roughing-In


No change in measurements if connected with drain illustrated. (K-7202)

Cut-out template	1016369-7	
Minimum access panel:		
Pump/control	34" (86.4cm) W x 15" (38.1cm) H	required



**NOTE: PUMP/PIPING PROTRUDES BEYOND RIM**

2-3/4" (7cm) MAX.

PUMP/CONTROL ACCESS

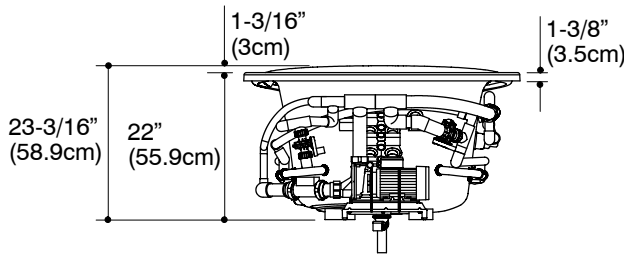

**K-1110-V**

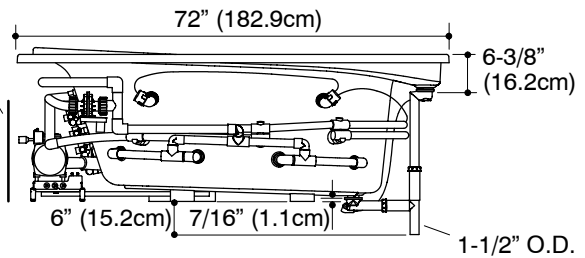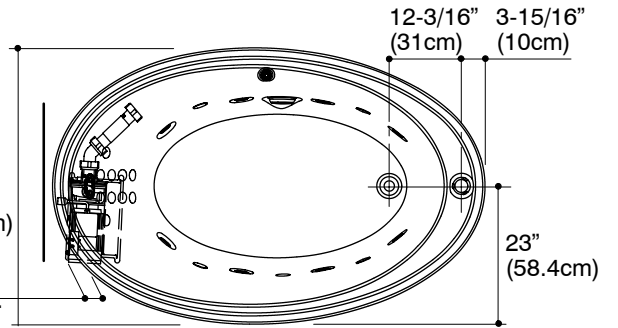

## Product Information

Bath whirlpool with Spa/Massage Package	K-1110-V	shown		
Required accessories:				
Drain	K-7202			
Fixture*:	basin area	top area	weight	
Bathing well	42" (106.7cm) x 25-1/2" (64.8cm)	63" (160cm) x 31-1/2" (80cm)	160 lbs. (72.6kg)	
water depth to rim	19-1/4" (48.9cm)			
capacity	96 gal. (363.4L)			
* Approximate measurements for comparison only.				
Pump	Heater	Voltage	Frequency	Amperage
2 HP	1.5 kW	240 V	50/60 Hz	15 A

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Earth-Leakage Circuit-Breaker (ELCB):	
Pump/control	220/240 V, 20 A, 50/60 Hz

## Notes

- Pump/piping protrudes beyond rim (see above).
- Install this product according to the installation guide.
- Floor support under whirlpool must provide for a minimum of 1400 lbs. (635kg)
- Hot water supply should be 70% of capacity or greater. Installations will vary.
- Fixture conforms to ANSI Standard Z124.1. All dimensions are nominal.

