

Features


- Acrylic
- 8 color-matched Kohler hydro-massage jets
- Single-speed pump with air switch
- Textured bottom surface
- Left or right drain
- Integral apron with removable access panel
- Integral tile flange on three sides for alcove installation
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

BATH WHIRLPOOL K-1151-LA ALSO K-1151-RA

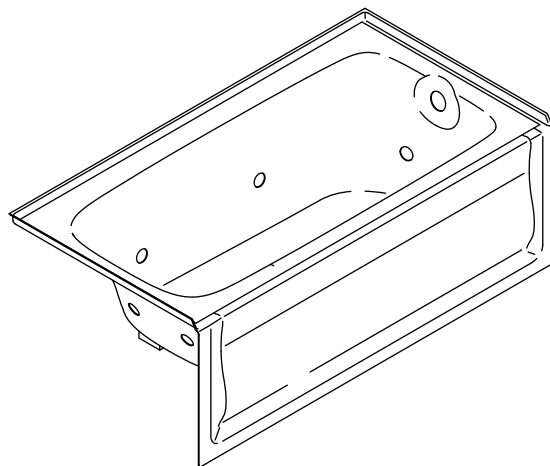

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1151-LA	Bath whirlpool – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1151-RA	Bath whirlpool – right drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories			
K-11677	Swiftflo™ adjustable trip lever drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 20" (508 mm) in height. Product shall feature an integral flange on three sides for alcove installation. Product shall feature 8 color-matched Kohler jets and a single-speed pump with air switch. Product shall feature an integral apron with removable access panel and textured bottom surface. Product shall be available with a left or right drain. Bath whirlpool shall be Kohler Model K-1151-____-____.

BANCROFT® 5'

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45" (1143 mm) x 22" (559 mm)
Basin area, top	54" (1372 mm) x 25" (635 mm)
Weight	135 lbs (61.2 kg)
To overflow:	
Water depth	15" (381 mm)
Capacity	60 gal (227.1 L)
* Approximate measurements for comparison only.	

Pump	V	Hz	A
1-speed	120	60	7

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz


Pump is supplied with a 24" (610 mm) grounding-type plug-in cord.

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-11677)

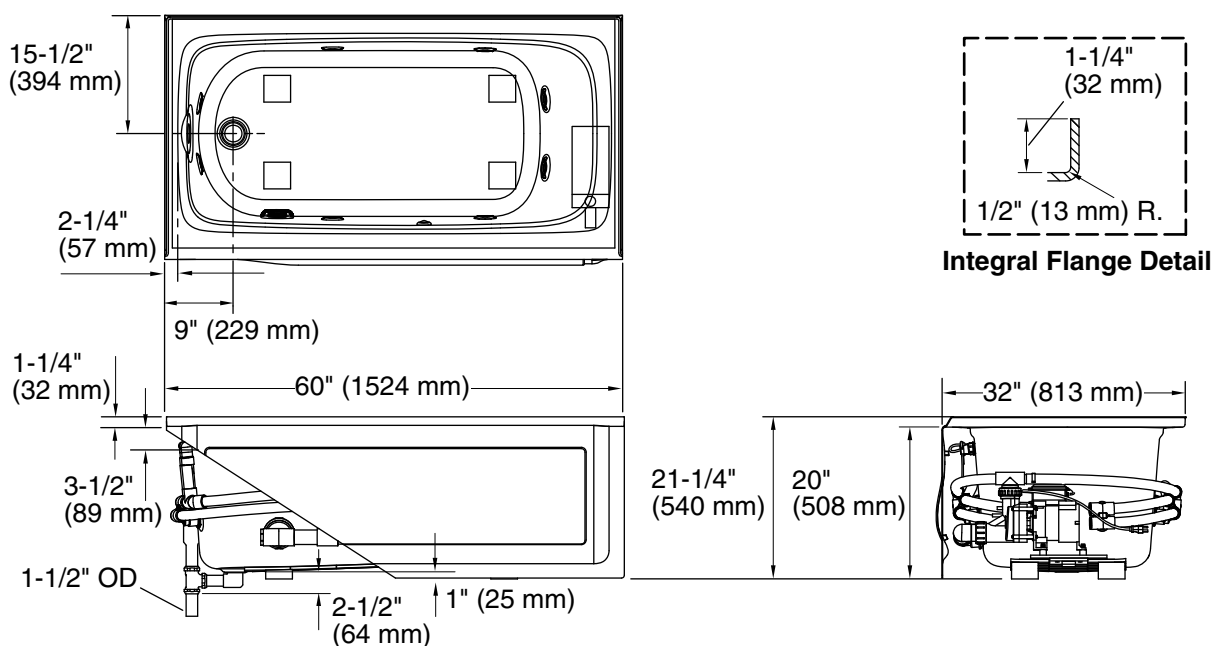

Product Diagram